

Factory-Verified Replacement

MERYDOM 12-25 0889/2-04951


Certified for interchange with IMO 12-25 0889/2-04951.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL	REFERENCE
12-25 0889/2-04951	IMO 12-25 0889/2-04951
SERIES	STRUCTURE
OTHER_STANDARD_BALL Series	Sfere a quattro punti di contatto
OVERALL OD	OVERALL ID
mm	mm
OVERALL HEIGHT	GEAR
mm	Dentatura interna

Published Technical Drawing

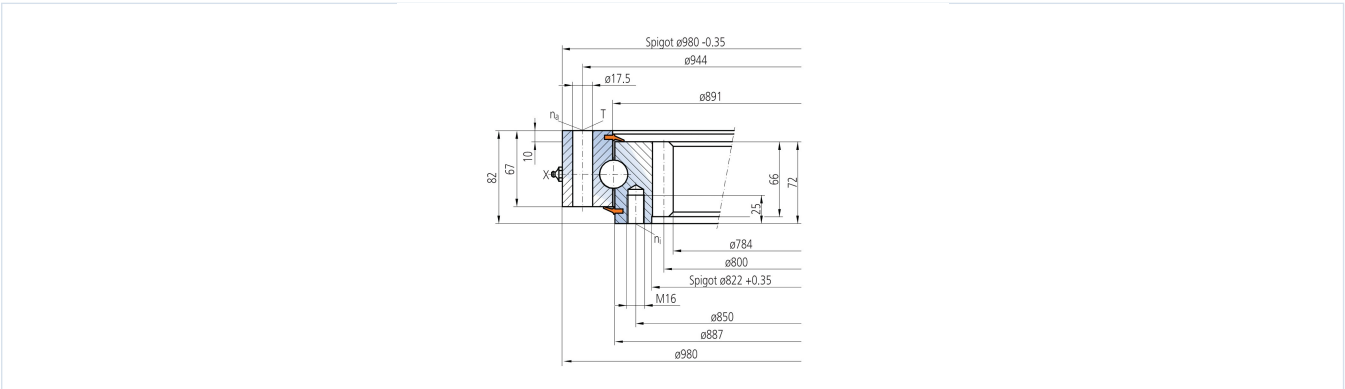

imo-12250889204951-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	12-25 0889/2-04951
Certified interchangeable with	IMO 12-25 0889/2-04951
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	FUNNPFO455CC5BPYDXQB3O3CZN
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	OTHER_STANDARD_BALL Series
Reference model	12-25 0889/2-04951
Bearing structure	Sfere a quattro punti di contatto
Gear arrangement	Dentatura interna
DIMENSION	
Assembly weight (G)	103 kg
MOUNTING	
Outer ring mounting-hole count (na)	24

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING (CONTINUED)	
Inner ring mounting-hole count (ni)	24
GEAR	
Gear module (m)	8 mm
Gear tooth count (z)	82
Addendum modification coefficient (x)	-1
PERFORMANCE	
Permitted circumferential force, normal (fz_norm)	30,8 kN
Permitted circumferential force, maximum (fz_max)	55 kN
Static radial load rating (Co_rad)	469 kN
Static axial load rating (Co_ax)	1.255 kN
Dynamic radial load rating (C_rad)	248 kN
Dynamic axial load rating (C_ax)	289 kN
PERFORMANCE RATINGS	
Fz Norm	30,8 kN Not simultaneous with other listed dynamic ratings
Fz Max	55 kN Not simultaneous with other listed dynamic ratings
Co Rad	469 kN Not simultaneous with other listed dynamic ratings
Co Ax	1.255 kN Not simultaneous with other listed dynamic ratings
C Rad	248 kN Not simultaneous with other listed dynamic ratings
C Ax	289 kN Not simultaneous with other listed dynamic ratings


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING INTERFACES	
Outer ring mounting	24 holes - See source drawing
Inner ring mounting	24 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	82
SOURCE TRACEABILITY	
Source document code	IMO_OTHER_STANDARD_BALL_EN
Source file	imo_weitere_standard-kugeldrehverbindungen-en.pdf
PDF page	27
Printed page	Not published
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-12250889204951-curve.webp SHA-256: 9c31f199c8317be910d49772cf397009c26f5da003d6dcf3572d419fac 0991a9
Outline Drawing	imo-12250889204951-drawing.webp SHA-256: 9fe9f2982c6ca741ffc5976ea9d409d7a7b554ee1d49d72aa56ed2e60e 9b7637

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

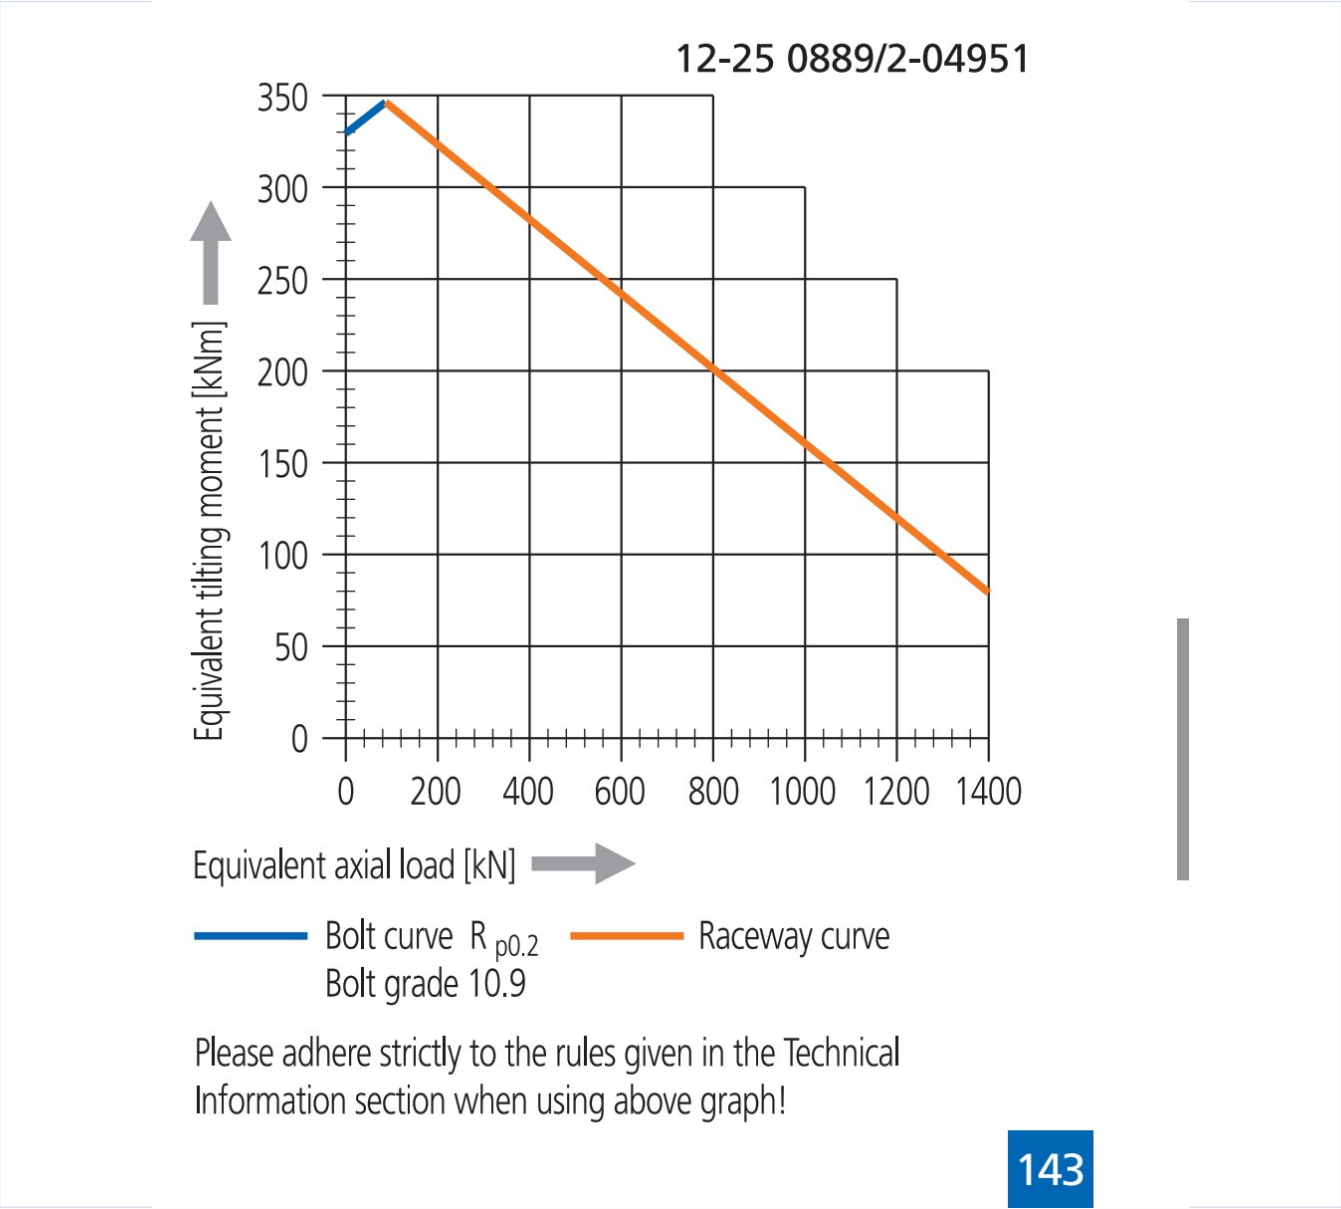

imo-12250889204951-curve.webp | SHA-256: 9c31f199c8317be910d49772cf397009c26f5da003d6dcf3572d419fac0991a9

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**FUNNPFO455CC5BPYDXQB3O3CZN****SOURCE DOCUMENT****IMO_OTHER_STANDARD_BALL_EN****SOURCE FILE****imo_weitere_standard-kugeldrehverbindungen-en.pdf****SOURCE LOCATION****PDF page 27 | Printed page Not published****VERIFICATION****Level 3 - MERYDOM Engineering Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/imo/12-25-0889-2-04951/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.