

Factory-Verified Replacement

MERYDOM 31-32 4000/2-07350

Certified for interchange with IMO 31-32 4000/2-07350.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle,
mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

31-32 4000/2-07350

REFERENCE

IMO 31-32 4000/2-07350

SERIES

332 Series

STRUCTURE

Rulli a tre file

OVERALL OD

4,351.6 mm

OVERALL ID

3,782 mm

OVERALL HEIGHT

mm

GEAR

Dentatura esterna

Published Technical Drawing



imo-31324000207350-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	31-32 4000/2-07350
Certified interchangeable with	IMO 31-32 4000/2-07350
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	NGLCBIA4YZUII4EOECFJJ6A5R3
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	332 Series
Reference model	31-32 4000/2-07350
Bearing structure	Rulli a tre file
Gear arrangement	Dentatura esterna
DIMENSION	
Overall outside diameter (Da)	4.351,6 mm
Overall inside diameter (di)	3.782 mm
Assembly weight (G)	3.752 kg

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING	
Outer ring bolt circle (La)	4.155 mm
Inner ring bolt circle (Li)	3.860 mm
Outer ring mounting-hole count (na)	72
GEAR	
Gear pitch diameter (d)	4.290 mm
Gear module (m)	22 mm
Gear tooth count (z)	195
Addendum modification coefficient (x)	0,5
PERFORMANCE	
Permitted circumferential force, normal (fz_norm)	295 kN
Permitted circumferential force, maximum (fz_max)	525 kN
Static radial load rating (Co_rad)	3.367 kN
Static axial load rating, tension (Co_ax_T)	34.558 kN
Static axial load rating, compression (Co_ax_H)	20.688 kN
Dynamic radial load rating (C_rad)	1.351 kN
Dynamic axial load rating, tension (C_ax_T)	4.955 kN
Dynamic axial load rating, compression (C_ax_H)	3.486 kN
PERFORMANCE RATINGS	
Fz Norm	295 kN Not simultaneous with other listed dynamic ratings
Fz Max	525 kN Not simultaneous with other listed dynamic ratings

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS (CONTINUED)	
Co Rad	3.367 kN Not simultaneous with other listed dynamic ratings
Co Ax T	34.558 kN Not simultaneous with other listed dynamic ratings
Co Ax H	20.688 kN Not simultaneous with other listed dynamic ratings
C Rad	1.351 kN Not simultaneous with other listed dynamic ratings
C Ax T	4.955 kN Not simultaneous with other listed dynamic ratings
C Ax H	3.486 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	72 holes - See source drawing
Inner ring mounting	holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	22 mm
Number of teeth	195
SOURCE TRACEABILITY	
Source document code	IMO_TRIPLE_ROW_ROLLER_EN
Source file	imo_rollendrehverbindung-en.pdf
PDF page	7
Printed page	Not published
Source language	EN
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-31324000207350-curve.webp SHA-256: d3524f150c542d636e2ea2d2c3710f6b7b2055e8df3d27b9b9b901ba19ca7796
Outline Drawing	imo-31324000207350-drawing.webp SHA-256: 7eb44cf5114241ded02727fbd84edd7214e6ad2cd632020596518b2a54e57ff7

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

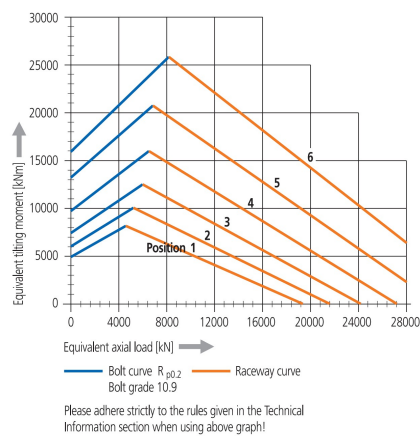

Bearing ring material: 42CrMo4V
7 to 9 Taper type grease nipples on each circumferential row
Mounting holes equally spaced
Raceway system supplied pre-lubricated
Dimensions without tolerances DIN ISO 2768 coarse

Clearances

Position	Radial clearance	Axial clearance
1	max. 0.33	max. 0.10
2	max. 0.33	max. 0.10
3	max. 0.40	max. 0.13
4	max. 0.50	max. 0.15
5	max. 0.50	max. 0.15
6	max. 0.50	max. 0.17

imo-31324000207350-curve.webp | SHA-256: d3524f150c542d636e2ea2d2c3710f6b7b2055e8df3d27b9b9b901ba19ca7796

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**NGLCBIA4YZUII4EOECFJJ6A5R3****SOURCE DOCUMENT****IMO_TRIPLE_ROW_ROLLER_EN****SOURCE FILE****imo_rollendrehverbindung-en.pdf****SOURCE LOCATION****PDF page 7 | Printed page Not published****VERIFICATION****Level 3 - MERYDOM Engineering Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/imo/31-32-4000-2-07350/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.