

Factory-Verified Replacement

MERYDOM VE040A01

Certified for interchange with La Leonessa VE040A01. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VE040A01

SERIES

1SE Series

OVERALL OD

403.5 mm

OVERALL HEIGHT

55 mm

REFERENCE

La Leonessa VE040A01

STRUCTURE

Sfere a quattro punti di contatto


OVERALL ID

235 mm


GEAR

Dentatura esterna

Published Technical Drawing

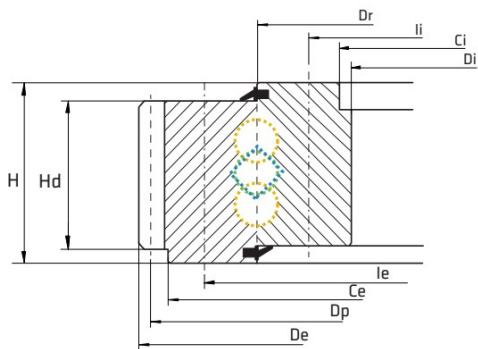

la-leonessa-1se-drawing.webp

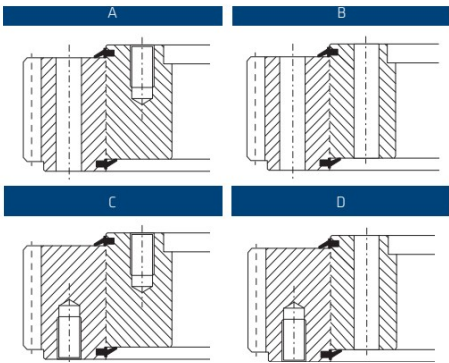

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VE040A01
Certified interchangeable with	La Leonessa VE040A01
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	YTS7E6P4AJAYBNG4FXIP2F6W6Y
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	1SE Series
Reference model	VE040A01
Bearing structure	Sfere a quattro punti di contatto
Gear arrangement	Dentatura esterna
DIMENSION	
Mass (P)	23 kg
Overall outside diameter (De)	403,5 mm
Overall inside diameter (Di)	235 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	55 mm
Dim Dr (Dr)	310 mm
Dim Centering Internal (Ci)	235 +0,3/0 mm
MOUNTING	
Outer ring bolt circle (Ie)	358 mm
Outer ring mounting-hole count (ne)	24
Outer ring mounting-hole specification (Me)	M12
Inner ring bolt circle (Ii)	259 mm
Inner ring mounting-hole count (ni)	28-1
Inner ring mounting-hole specification (Mi)	M12
GEAR	
Gear module (m)	4,5 mm
Gear tooth count (z)	88
Liebherr catalogue gear dimension k*m (km)	0,75 mm
Gear pitch diameter (Dp)	396 mm
Gear Tooth Height (Hd)	39 mm
PERFORMANCE	
Basic static axial load rating (C0a)	700 kN
Static tilting moment rating (M0r)	50 kNm
Normal tooth force (Fnom)	8 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum tooth force (Fmax)	17 kN
MISCELLANEOUS	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	700 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	50 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	8 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	17 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	24 holes - 24; M12
Inner ring mounting	28 holes - 28-1; M12
GEAR INTERFACE	
Pitch system	module
Module reference	4.5 mm
Number of teeth	88
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-EXTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.pdf
PDF page	4
Printed page	4
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-1se-static_load_curve.webp SHA-256: 62bcb1797791d738ca65eca2203a02e0957321a0ae736fda2a8e171090a981e9
Outline Drawing	la-leonessa-1se-drawing.webp SHA-256: 9def12f376fbd9bc222f66ab0503412bd5a475fdfe624e4dbfe0ca549ea4d61f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

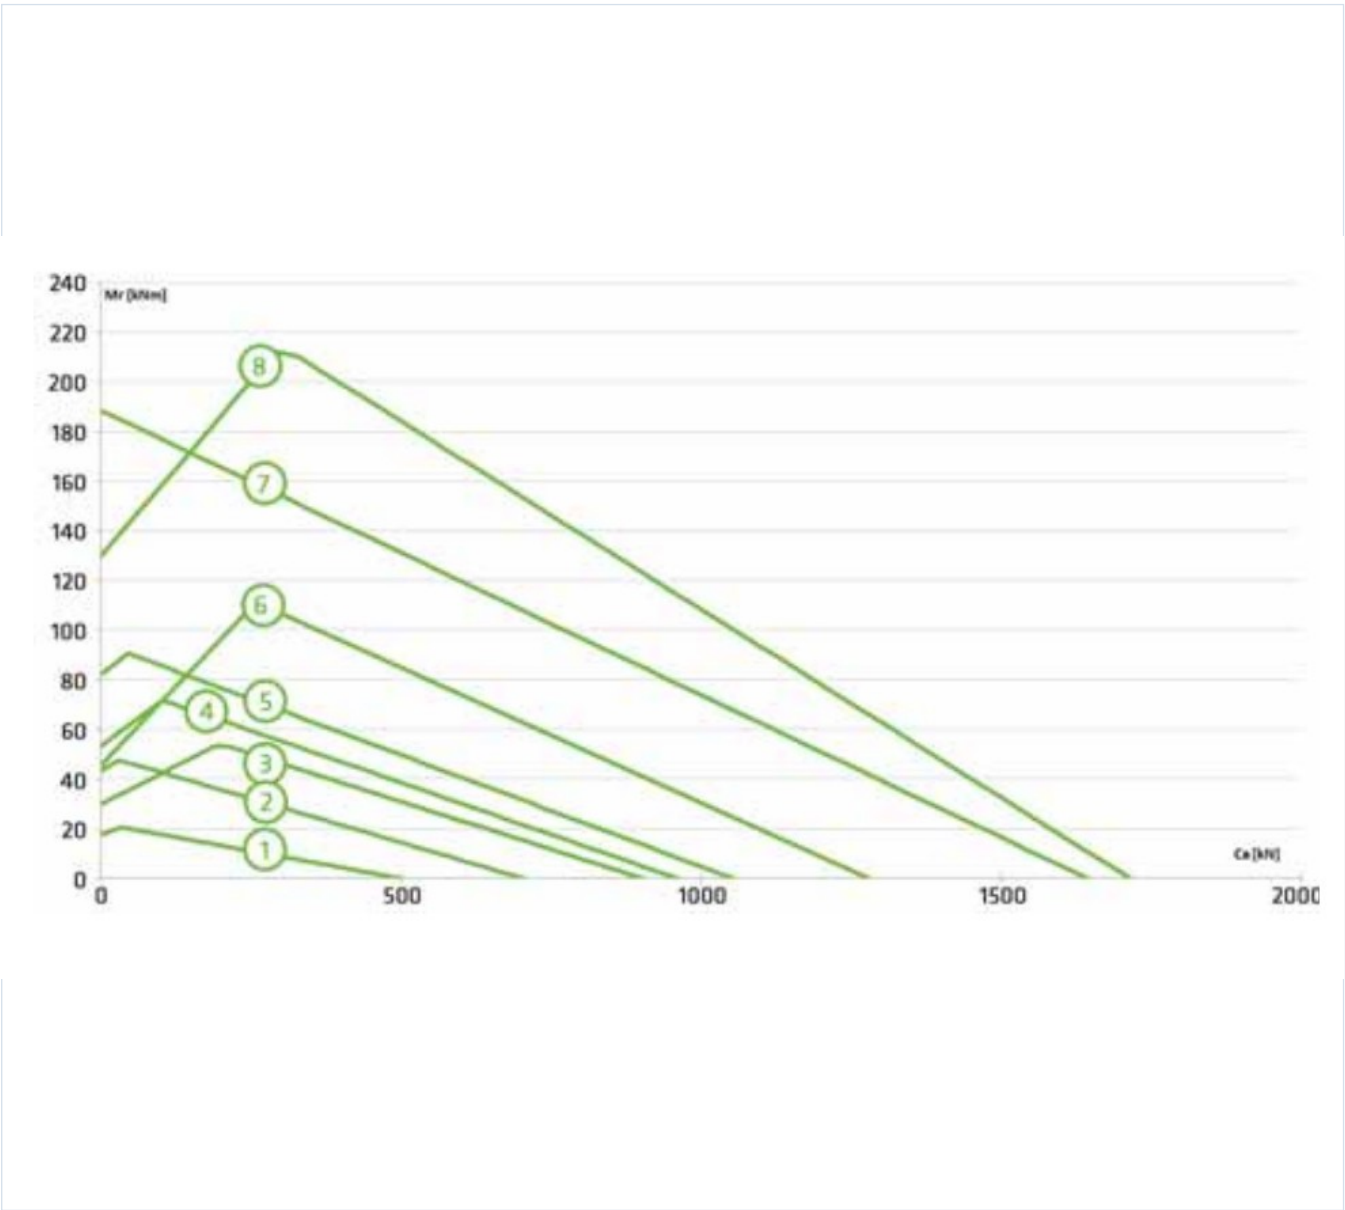

la-leonessa-1se-static_load_curve.webp | SHA-256:
62bcb1797791d738ca65eca2203a02e0957321a0ae736fda2a8e171090a981e9

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

YTS7E6P4AJAYBNG4FXIP2F6W6Y

SOURCE FILE

**SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.
pdf**

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

**LA-LEONESSA-EXTERNAL-GEAR-CATALOG-20
17**

SOURCE LOCATION

PDF page 4 | Printed page 4

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/la-leonessa/ve040a01/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.