

Factory-Verified Replacement

MERYDOM VE226B03

Certified for interchange with La Leonessa VE226B03. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VE226B03

SERIES

2SE Series

OVERALL OD

2,265.2 mm

OVERALL HEIGHT

180 mm

REFERENCE

La Leonessa VE226B03

STRUCTURE

Cuscinetto a sfere a due corone


OVERALL ID

1,815 mm


GEAR

Dentatura esterna

Published Technical Drawing

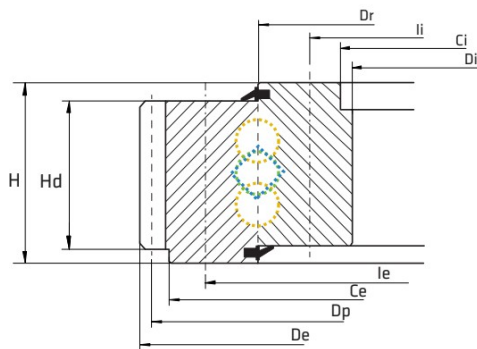

la-leonessa-2se-drawing.webp

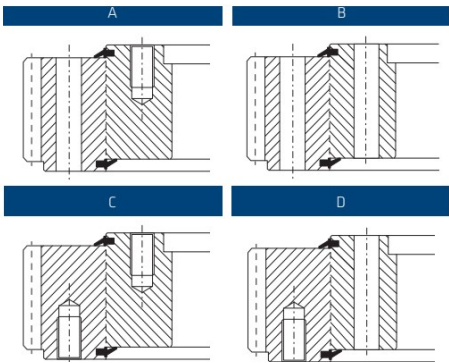

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VE226B03
Certified interchangeable with	La Leonessa VE226B03
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	ZAOGLWOELRXGFAPUTCSCFIMUBO
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	2SE Series
Reference model	VE226B03
Bearing structure	Cuscinetto a sfere a due corone
Gear arrangement	Dentatura esterna
DIMENSION	
Mass (P)	1.561 kg
Overall outside diameter (De)	2.265,2 mm
Overall inside diameter (Di)	1.815 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	180 mm
Dim Dr (Dr)	2.002,5 mm
MOUNTING	
Outer ring bolt circle (Ie)	2.124 mm
Outer ring mounting-hole count (ne)	60
Outer ring mounting-hole specification (Me)	M30
Inner ring bolt circle (Ii)	1.880 mm
Inner ring mounting-hole count (ni)	60
Inner ring mounting-hole specification (Mi)	M30
GEAR	
Gear module (m)	14 mm
Gear tooth count (z)	159
Addendum modification product x^*m (xm)	7 mm
Liebherr catalogue gear dimension k^*m (km)	1,4 mm
Gear pitch diameter (Dp)	2.240 mm
Gear Tooth Height (Hd)	129 mm
PERFORMANCE	
Basic static axial load rating (C0a)	15.940 kN
Static tilting moment rating (M0r)	8.458 kNm
Normal tooth force (Fnom)	207 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum tooth force (Fmax)	414 kN
MISCELLANEOUS	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	15.940 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	8.458 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	207 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	414 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	60 holes - 60; M30
Inner ring mounting	60 holes - 60; M30
GEAR INTERFACE	
Pitch system	module
Module reference	14 mm
Number of teeth	159
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-EXTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.pdf
PDF page	12
Printed page	12
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-2se-static_load_curve.webp SHA-256: 0056d7fd4ded2922ffa0000f4b2784841e0dbba7de039b531b9334852625cba1
Outline Drawing	la-leonessa-2se-drawing.webp SHA-256: 9def12f376fbd9bc222f66ab0503412bd5a475fdfe624e4dbfe0ca549ea4d61f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

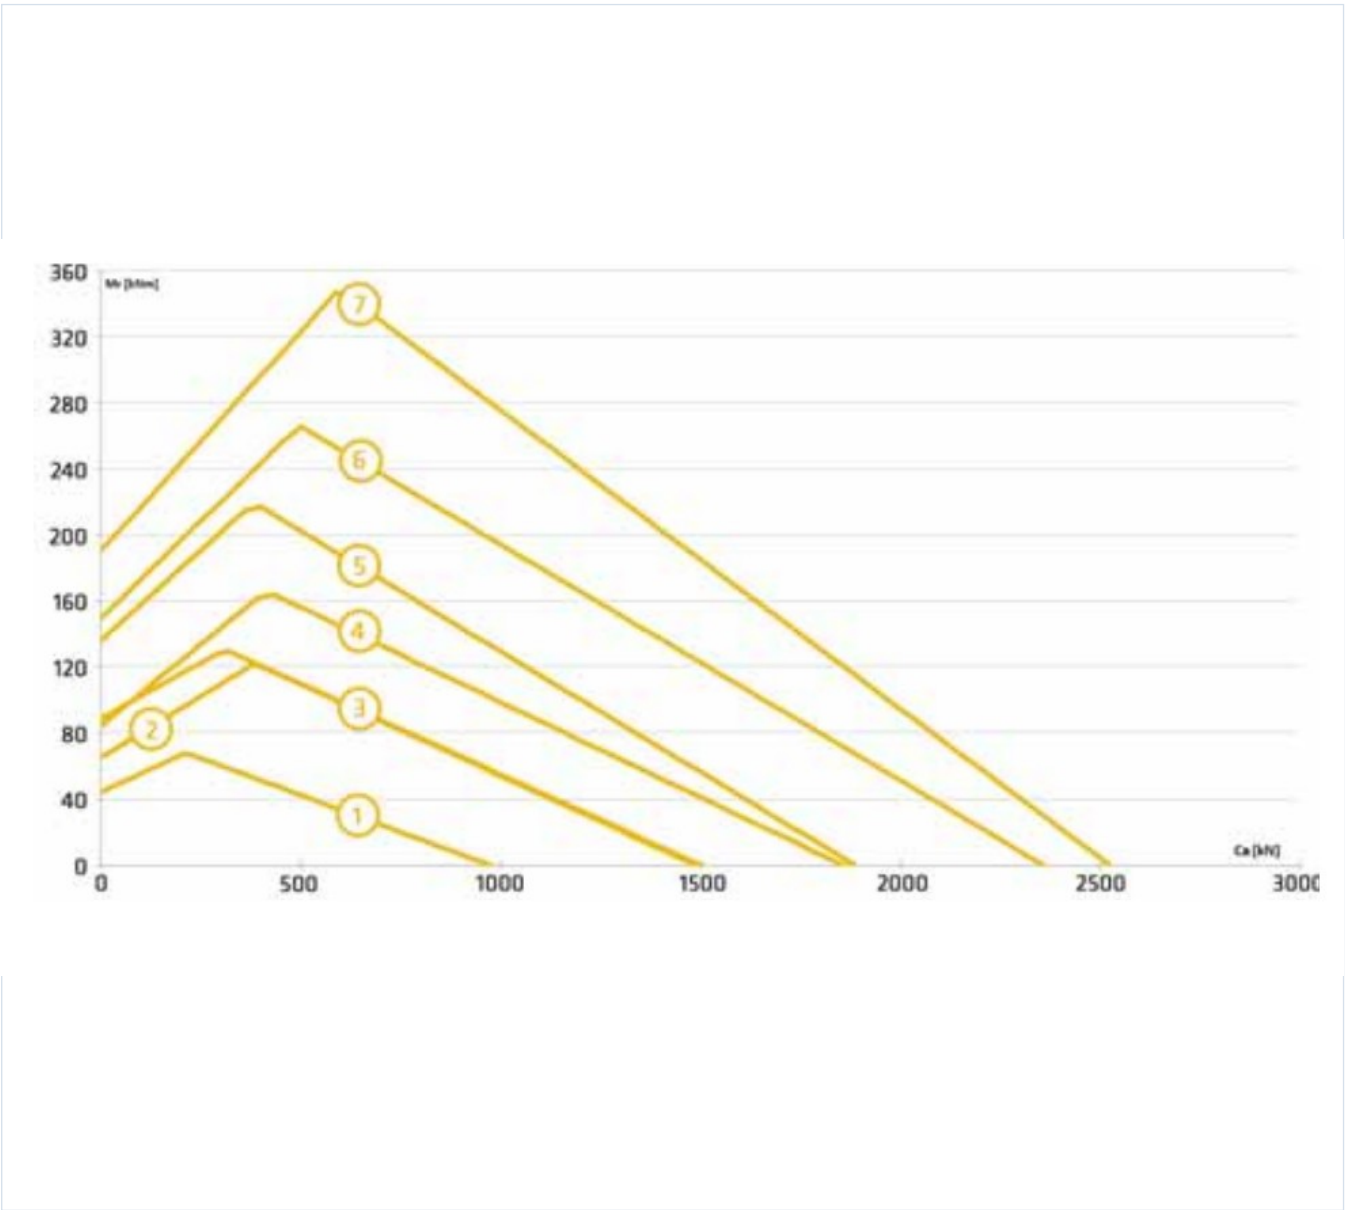

la-leonessa-2se-static_load_curve.webp | SHA-256:
0056d7fd4ded2922ffa0000f4b2784841e0dbba7de039b531b9334852625cba1

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

ZAUGLWOELRXGFAPUTCSCFIMUBO

SOURCE FILE

**SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.
pdf**

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

**LA-LEONESSA-EXTERNAL-GEAR-CATALOG-20
17**

SOURCE LOCATION

PDF page 12 | Printed page 12

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/la-leonessa/ve226b03/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.