

Factory-Verified Replacement

MERYDOM VI217B00

Certified for interchange with La Leonessa VI217B00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VI217B00

SERIES

2SI Series

OVERALL OD

2,178 mm

OVERALL HEIGHT

159 mm

REFERENCE

La Leonessa VI217B00

STRUCTURE

Cuscinetto a sfere a due corone


OVERALL ID

1,744 mm


GEAR

Dentatura interna

Published Technical Drawing

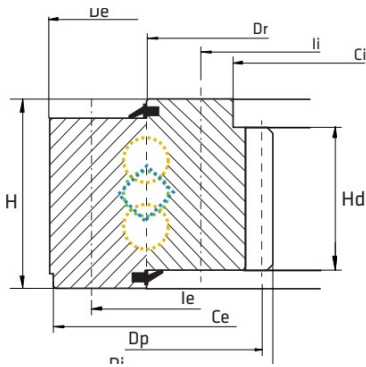

la-leonessa-2si-drawing.webp

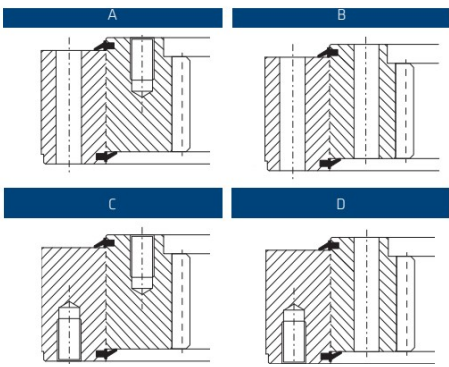

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| MERYDOM CERTIFIED PRODUCT            |                                        |
|--------------------------------------|----------------------------------------|
| Product brand                        | MERYDOM                                |
| MERYDOM model                        | VI217B00                               |
| Certified interchangeable with       | La Leonessa VI217B00                   |
| Verification status                  | Level 3 - MERYDOM Engineering Verified |
| Reviewed by                          | MERYDOM Engineering Department         |
| Public record UID                    | S4ZDPMSOG54CLJXUM5ZYTQMWPA             |
| MATERIALS                            |                                        |
| Configurable ring material options   | 42CrMo / 50Mn                          |
| Seal material                        | NBR - Nitrile rubber                   |
| Configurable spacer material options | Engineering nylon / Brass              |
| IDENTIFICATION                       |                                        |
| Reference brand                      | La Leonessa                            |
| Reference series                     | 2SI Series                             |
| Reference model                      | VI217B00                               |
| Bearing structure                    | Cuscinetto a sfere a due corone        |
| Gear arrangement                     | Dentatura interna                      |
| DIMENSION                            |                                        |
| Mass (P)                             | 1.145 kg                               |
| Overall outside diameter (De)        | 2.178 mm                               |
| Overall inside diameter (Di)         | 1.744 mm                               |

## Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| DIMENSION (CONTINUED)                       |                 |
|---------------------------------------------|-----------------|
| Overall height (H)                          | 159 mm          |
| Dim Dr (Dr)                                 | 2.002,5 mm      |
| Dim Centering External (Ce)                 | 2.175 0/-0,4 mm |
| MOUNTING                                    |                 |
| Outer ring bolt circle (Ie)                 | 2.103 mm        |
| Outer ring mounting-hole count (ne)         | 76              |
| Outer ring mounting-hole specification (Me) | M30             |
| Inner ring bolt circle (Ii)                 | 1.903 mm        |
| Inner ring mounting-hole count (ni)         | 76              |
| Inner ring mounting-hole specification (Mi) | M30             |
| GEAR                                        |                 |
| Gear module (m)                             | 16 mm           |
| Gear tooth count (z)                        | 110             |
| Addendum modification product x*m (xm)      | 8 mm            |
| Gear pitch diameter (Dp)                    | 1.776 mm        |
| Gear Tooth Height (Hd)                      | 150 mm          |
| PERFORMANCE                                 |                 |
| Basic static axial load rating (C0a)        | 14.770 kN       |
| Static tilting moment rating (M0r)          | 7.848 kNm       |
| Normal tooth force (Fnom)                   | 247 kN          |

# Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| PERFORMANCE (CONTINUED)      |                                                                |
|------------------------------|----------------------------------------------------------------|
| Maximum tooth force (Fmax)   | 494 kN                                                         |
| MISCELLANEOUS                |                                                                |
| Pattern (Schema)             | C                                                              |
| PERFORMANCE RATINGS          |                                                                |
| Rating Axial Static          | 14.770 kN   Not simultaneous with other listed dynamic ratings |
| Rating Tilting Moment Static | 7.848 kNm   Not simultaneous with other listed dynamic ratings |
| Rating Tooth Force Normal    | 247 kN   Not simultaneous with other listed dynamic ratings    |
| Rating Tooth Force Max       | 494 kN   Not simultaneous with other listed dynamic ratings    |
| MOUNTING INTERFACES          |                                                                |
| Outer ring mounting          | 76 holes - 76; M30                                             |
| Inner ring mounting          | 76 holes - 76; M30                                             |
| GEAR INTERFACE               |                                                                |
| Pitch system                 | module                                                         |
| Module reference             | 16 mm                                                          |
| Number of teeth              | 110                                                            |
| SOURCE TRACEABILITY          |                                                                |
| Source document code         | LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017                         |
| Source file                  | SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf                        |
| PDF page                     | 12                                                             |
| Printed page                 | 12                                                             |
| Source language              | EN                                                             |


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| SOURCE TRACEABILITY (CONTINUED) |                                                                                                                       |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Original unit system            | Metric                                                                                                                |
| PUBLISHED TECHNICAL MEDIA       |                                                                                                                       |
| Load Curve Chart                | la-leonessa-2si-static_load_curve.webp   SHA-256:<br>2d07d5007c414f54f7e8476084d020a30af3af05a960e7f690827754e00574cb |
| Outline Drawing                 | la-leonessa-2si-drawing.webp   SHA-256:<br>3c0269351f1480df2b4130d7fb5c79552a0896a4f557467d7b138da54c54c490           |

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

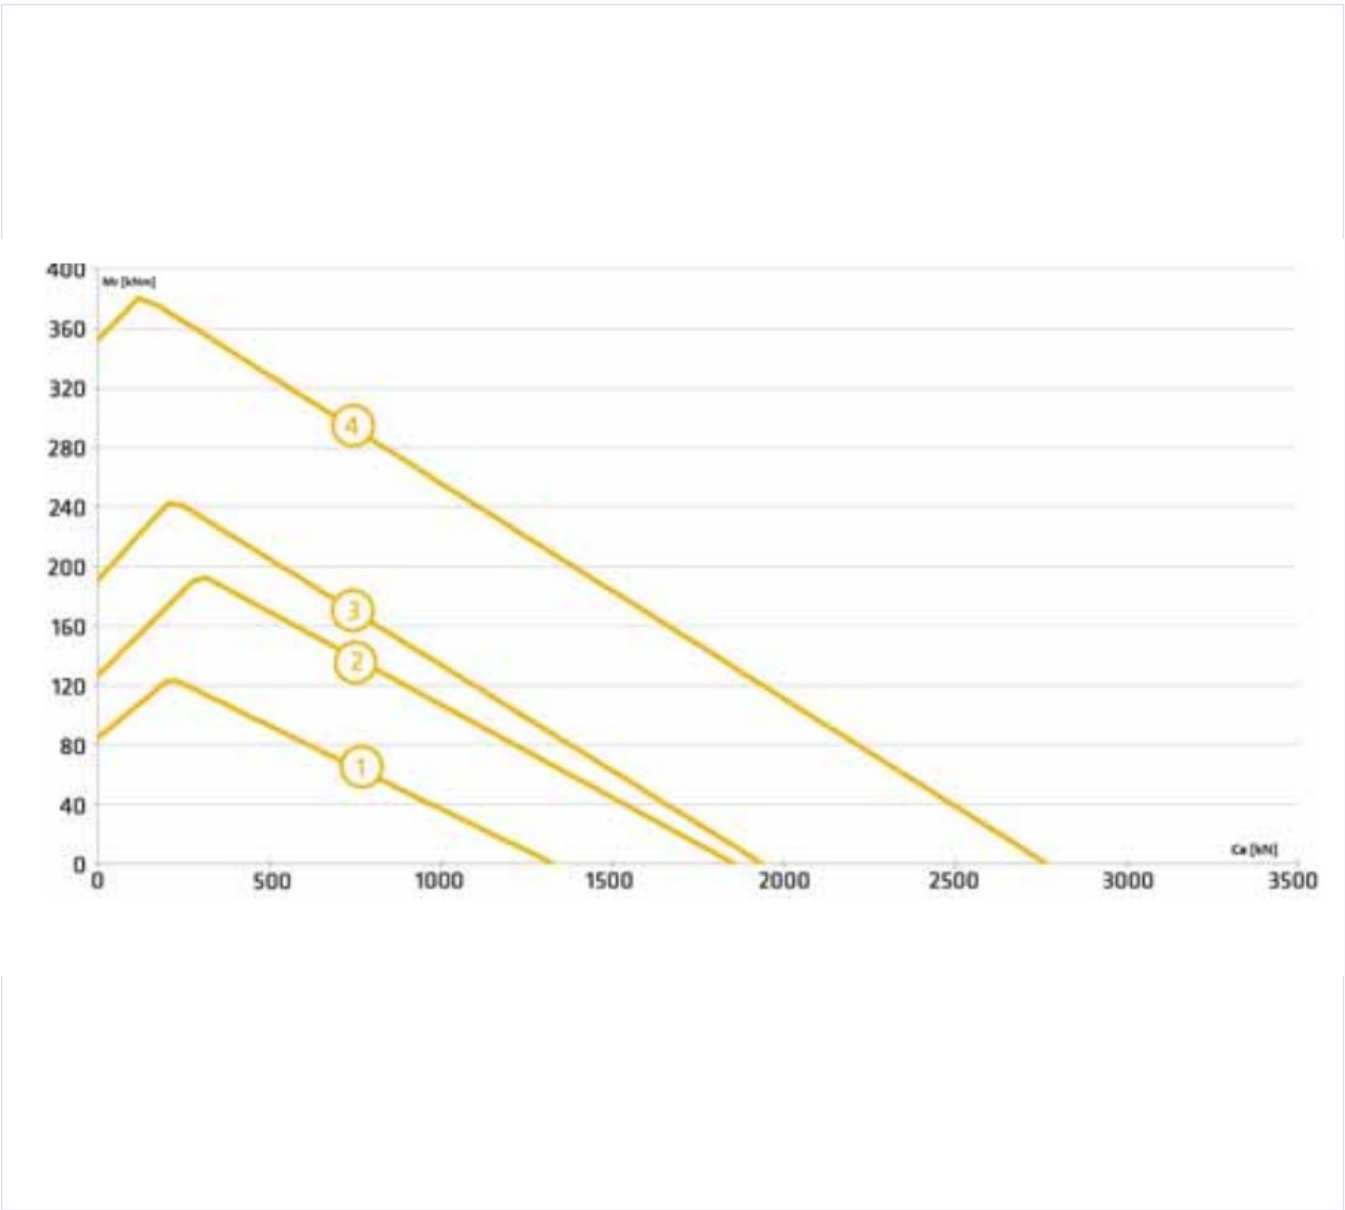

la-leonessa-2si-static\_load\_curve.webp | SHA-256:  
2d07d5007c414f54f7e8476084d020a30af3af05a960e7f690827754e00574cb

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

## Source and Verification Traceability

### PUBLIC RECORD UID

**S4ZDPMSOG54CLJXUM5ZYTQMWPA**

### SOURCE FILE

**SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf**

### VERIFICATION

**Level 3 - MERYDOM Engineering  
Verified**

### SOURCE DOCUMENT

**LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017**

### SOURCE LOCATION

**PDF page 12 | Printed page 12**

### REVIEWED BY

**MERYDOM Engineering Department**

## Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

### Request Price, Delivery and Final Engineering Confirmation

Email: [jovi@merydom.com](mailto:jovi@merydom.com) | Email: [andi@merydom.com](mailto:andi@merydom.com) | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/la-leonessa/vi217b00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.