

Factory-Verified Replacement

MERYDOM VS094ZB00

Certified for interchange with La Leonessa VS094ZB00.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle,
mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VS094ZB00

SERIES

Z_UNGEARED Series

OVERALL OD

948 mm

OVERALL HEIGHT

56 mm

REFERENCE

La Leonessa VS094ZB00

STRUCTURE

Flanged Four Point Contact Ball


OVERALL ID

734 mm

GEAR

Senza dentatura

Published Technical Drawing

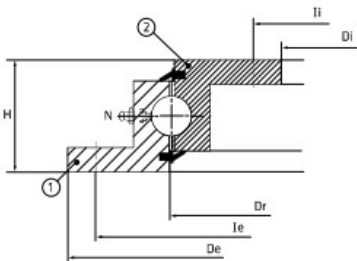

la-leonessa-z-ungeared-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VS094ZB00
Certified interchangeable with	La Leonessa VS094ZB00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	CCTOERBH6C72OJAV7IUIDYD3KV
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	Z_UNGEARED Series
Reference model	VS094ZB00
Bearing structure	Flanged Four Point Contact Ball
Gear arrangement	Senza dentatura
DIMENSION	
Mass (P)	47 kg
Overall outside diameter (De)	948 mm
Overall inside diameter (Di)	734 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	56 mm
Dim Dr (Dr)	844 mm
MOUNTING	
Outer ring bolt circle (Ie)	920 mm
Outer ring mounting-hole count (ne)	14
Outer ring mounting-hole specification (Me)	M16
Inner ring bolt circle (Ii)	762 mm
Inner ring mounting-hole count (ni)	18
Inner ring mounting-hole specification (Mi)	M16
PERFORMANCE	
Basic static axial load rating (C0a)	560 kN
Static tilting moment rating (M0r)	103 kNm
PERFORMANCE RATINGS	
Rating Axial Static	560 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	103 kNm Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	14 holes - 14; M16
Inner ring mounting	18 holes - 18; M16
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-FLANGED-SLEWING-BEARINGS-CATALOG-2013
Source file	Catalogo_flangiati.pdf
PDF page	2
Printed page	2
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-z-ungeared-static_load_curve.webp SHA-256: 7e5942d2250300b774b9a47276b2238aec0fd1620da21ca6fa1266da04750467
Outline Drawing	la-leonessa-z-ungeared-drawing.webp SHA-256: 7e8fb250e48e6f62476f696f19c2668b0d4ff351cdd9e12295a9681c477d187d

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

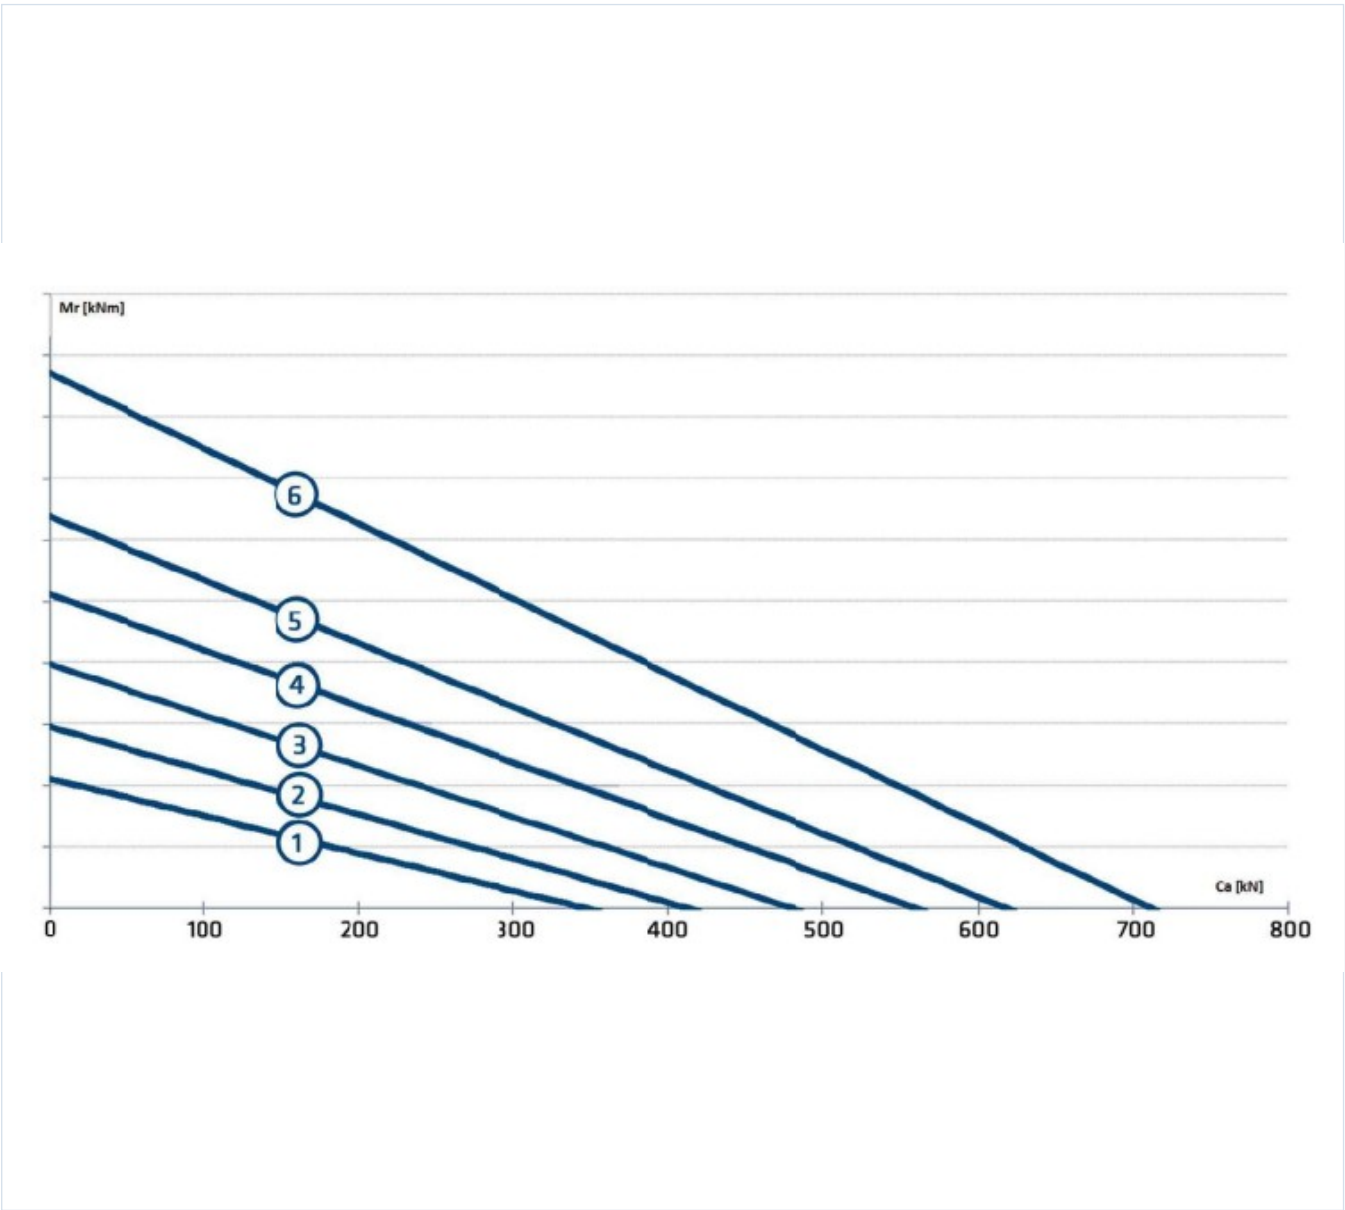

la-leonessa-z-ungeared-static_load_curve.webp | SHA-256:
7e5942d2250300b774b9a47276b2238aec0fd1620da21ca6fa1266da04750467

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

CCTOERBH6C72OJAV7IUIDYD3KV

SOURCE FILE

Catalogo_flangiati.pdf

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

**LA-LEONESSA-FLANGED-SLEWING-BEARINGS
-CATALOG-2013**

SOURCE LOCATION

PDF page 2 | Printed page 2

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/la-leonessa/vs094zb00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.