

Factory-Verified Replacement

MERYDOM 02-2992-00

Certified for interchange with ROLLIX 02-2992-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

02-2992-00

SERIES

02 Series

OVERALL OD

3,180 mm

OVERALL HEIGHT

150 mm

REFERENCE

ROLLIX 02-2992-00

STRUCTURE

Sfere a quattro punti di contatto a una corona


OVERALL ID

2,722 mm

GEAR

Dentatura interna

Published Technical Drawing

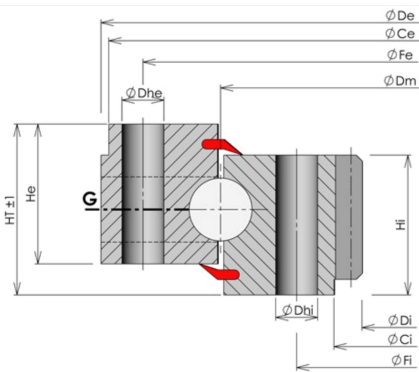

rollix-page-074-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	02-2992-00
Certified interchangeable with	ROLLIX 02-2992-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	6PCJ4R3DSTU56N5MYIMMTLPZ2R
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	02 Series
Reference model	02-2992-00
Bearing structure	Sfere a quattro punti di contatto a una corona
Gear arrangement	Dentatura interna
DIMENSION	
Overall height (HT)	150 mm
Overall outside diameter (Dia De)	3.180 mm
Outer ring height (He)	125 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	2.722 mm
Inner ring height (Hi)	135 mm
Assembly weight (Weight)	1.784 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	3.178 mm
Inner ring pilot diameter (Dia Ci)	2.984 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	3.104 mm
Outer ring mounting-hole count (Ne)	90
Outer ring mounting-hole specification (Dhe)	33 mm
Inner ring hole type (Inner ring hole type)	Th
Inner ring bolt circle (Dia Fi)	2.880 mm
Inner ring mounting-hole count (Ni)	90
Inner ring mounting-hole specification (Dhi)	33 mm
GEAR	
Gear module (Module)	18 mm
Gear tooth count (Z)	152
Gear face width (W)	135 mm
PERFORMANCE	
Gear capacity, unhardened (Gear capacity unhardened)	480 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Gear capacity, hardened (Gear capacity hardened)	558 kN
MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	E
Greasing hole type (Greasing hole type)	R
PERFORMANCE RATINGS	
Rating Gear Capacity Hardened	558 kN Not simultaneous with other listed dynamic ratings
Rating Gear Capacity Unhardened	480 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	90 holes - External ring hole type Th; Dhe 33 mm
Inner ring mounting	90 holes - Inner ring hole type Th; Dhi 33 mm
GEAR INTERFACE	
Pitch system	module
Module reference	18 mm
Number of teeth	152
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	74
Printed page	74
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-074-curve.webp SHA-256: 2e1b2996703386411f3dc857a87e245863e9d90e931f1744e92600a036661b47
Outline Drawing	rollix-page-074-drawing.webp SHA-256: 8723a1a98f1d8789f166d5455936db12c5e368dd77132d9955cccd0eb38d4538

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

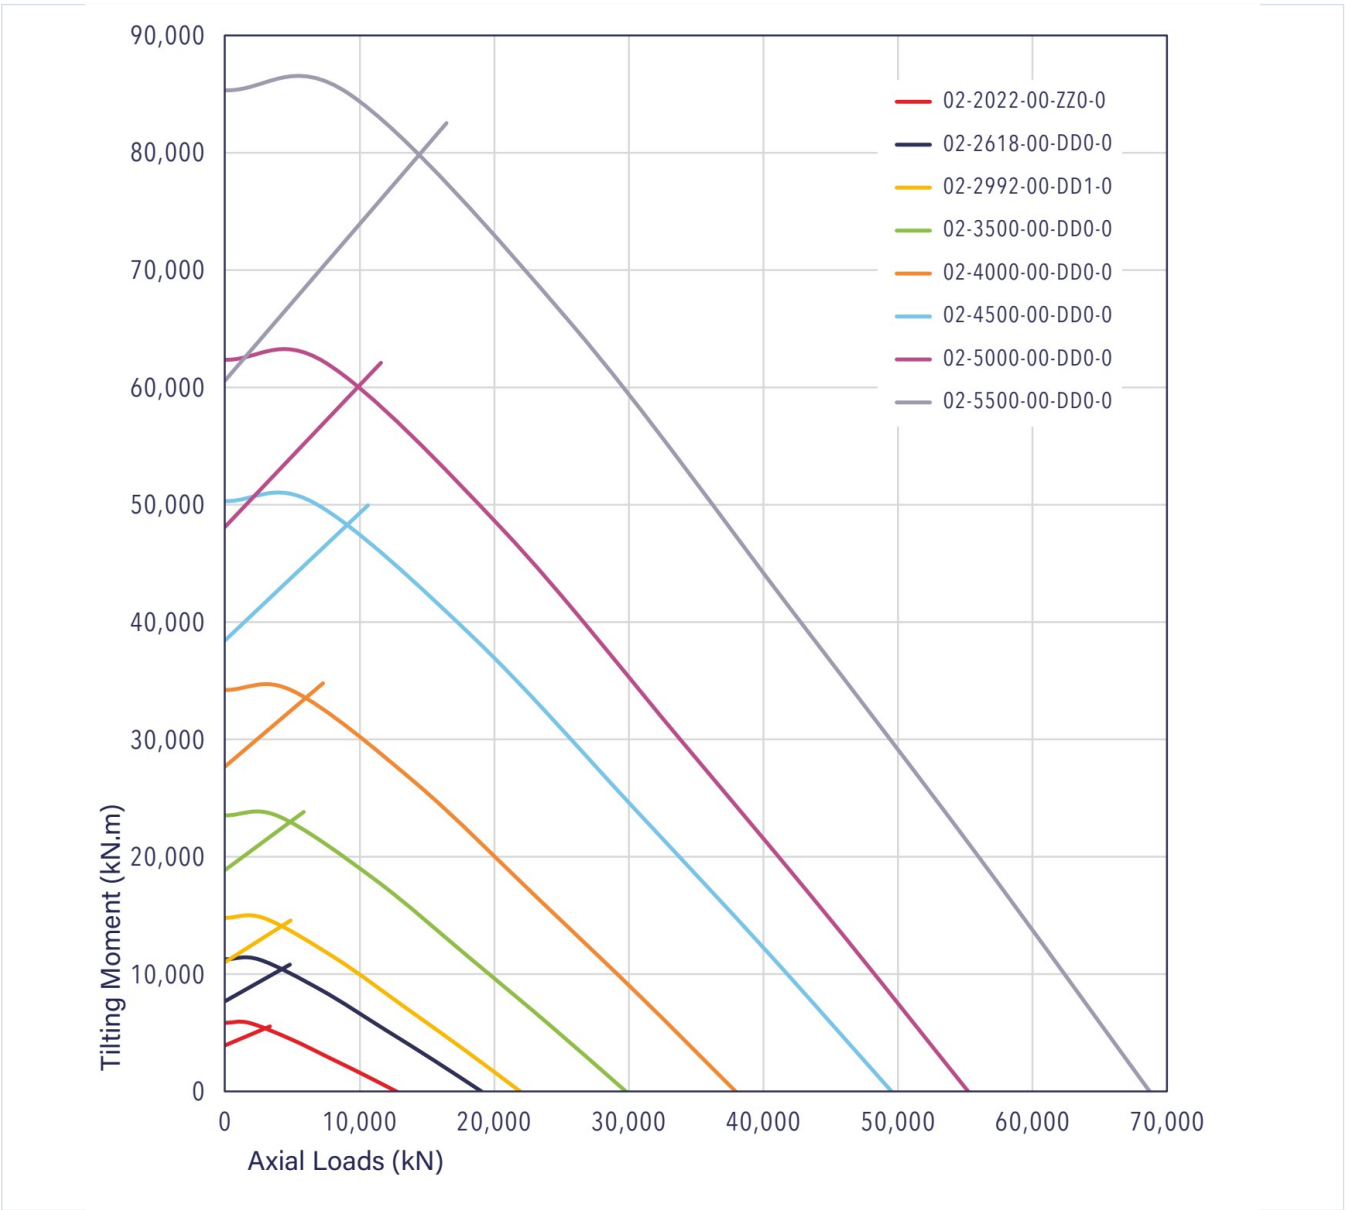

rollix-page-074-curve.webp | SHA-256: 2e1b2996703386411f3dc857a87e245863e9d90e931f1744e92600a036661b47

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

6PCJ4R3DSTU56N5MYIMMTLPZ2R

SOURCE FILE

ROLLIX.pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07

SOURCE LOCATION

PDF page 74 | Printed page 74

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/rollix/02-2992-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.