

Factory-Verified Replacement

MERYDOM 35-0411-01

Certified for interchange with ROLLIX 35-0411-01. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

35-0411-01

REFERENCE

ROLLIX 35-0411-01

SERIES

35 Series

STRUCTURE

Cuscinetto a sfere di serie leggera

OVERALL OD

486 mm

OVERALL ID

325 mm


OVERALL HEIGHT

56 mm

GEAR

Dentatura interna

Published Technical Drawing

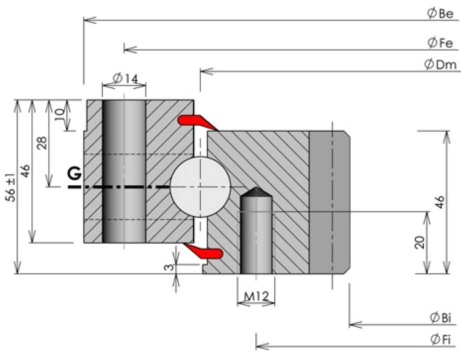

rollix-page-095-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	35-0411-01
Certified interchangeable with	ROLLIX 35-0411-01
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	OUSK24AA5FXKDTATHAXEVEUMLX
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	35 Series
Reference model	35-0411-01
Bearing structure	Cuscinetto a sfere di serie leggera
Gear arrangement	Dentatura interna
DIMENSION	
Overall height (HT)	56 mm
Overall outside diameter (Dia De)	486 mm
Outer ring height (He)	46 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	325 mm
Inner ring height (Hi)	46 mm
Assembly weight (Weight)	31 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	484 mm
Inner ring pilot diameter (Dia Ci)	409,5 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	460 mm
Outer ring mounting-hole count (Ne)	24
Outer ring mounting-hole specification (Dhe)	14 mm
Inner ring hole type (Inner ring hole type)	Bd
Inner ring bolt circle (Dia Fi)	375 mm
Inner ring mounting-hole count (Ni)	24
Inner ring mounting-hole specification (Dhi)	M12 mm
GEAR	
Gear module (Module)	5 mm
Gear tooth count (Z)	67
Gear face width (W)	46 mm
PERFORMANCE	
Gear capacity, unhardened (Gear capacity unhardened)	32 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	E
Greasing hole type (Greasing hole type)	R
PERFORMANCE RATINGS	
Rating Gear Capacity Unhardened	32 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	24 holes - External ring hole type Th; Dhe 14 mm
Inner ring mounting	24 holes - Inner ring hole type Bd; Dhi M12 mm
GEAR INTERFACE	
Pitch system	module
Module reference	5 mm
Number of teeth	67
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	95
Printed page	95
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-095-curve.webp SHA-256: da39b5c4bb522fc898f6acb6a64369a174df31ad2edfdc3d64f0c45e4a403834


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA (CONTINUED)	
Outline Drawing	rollix-page-095-drawing.webp SHA-256: edc883d70438e98afba27006db82e90d761cc1d92be9242fe5c8bf1baf 8c23d6

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

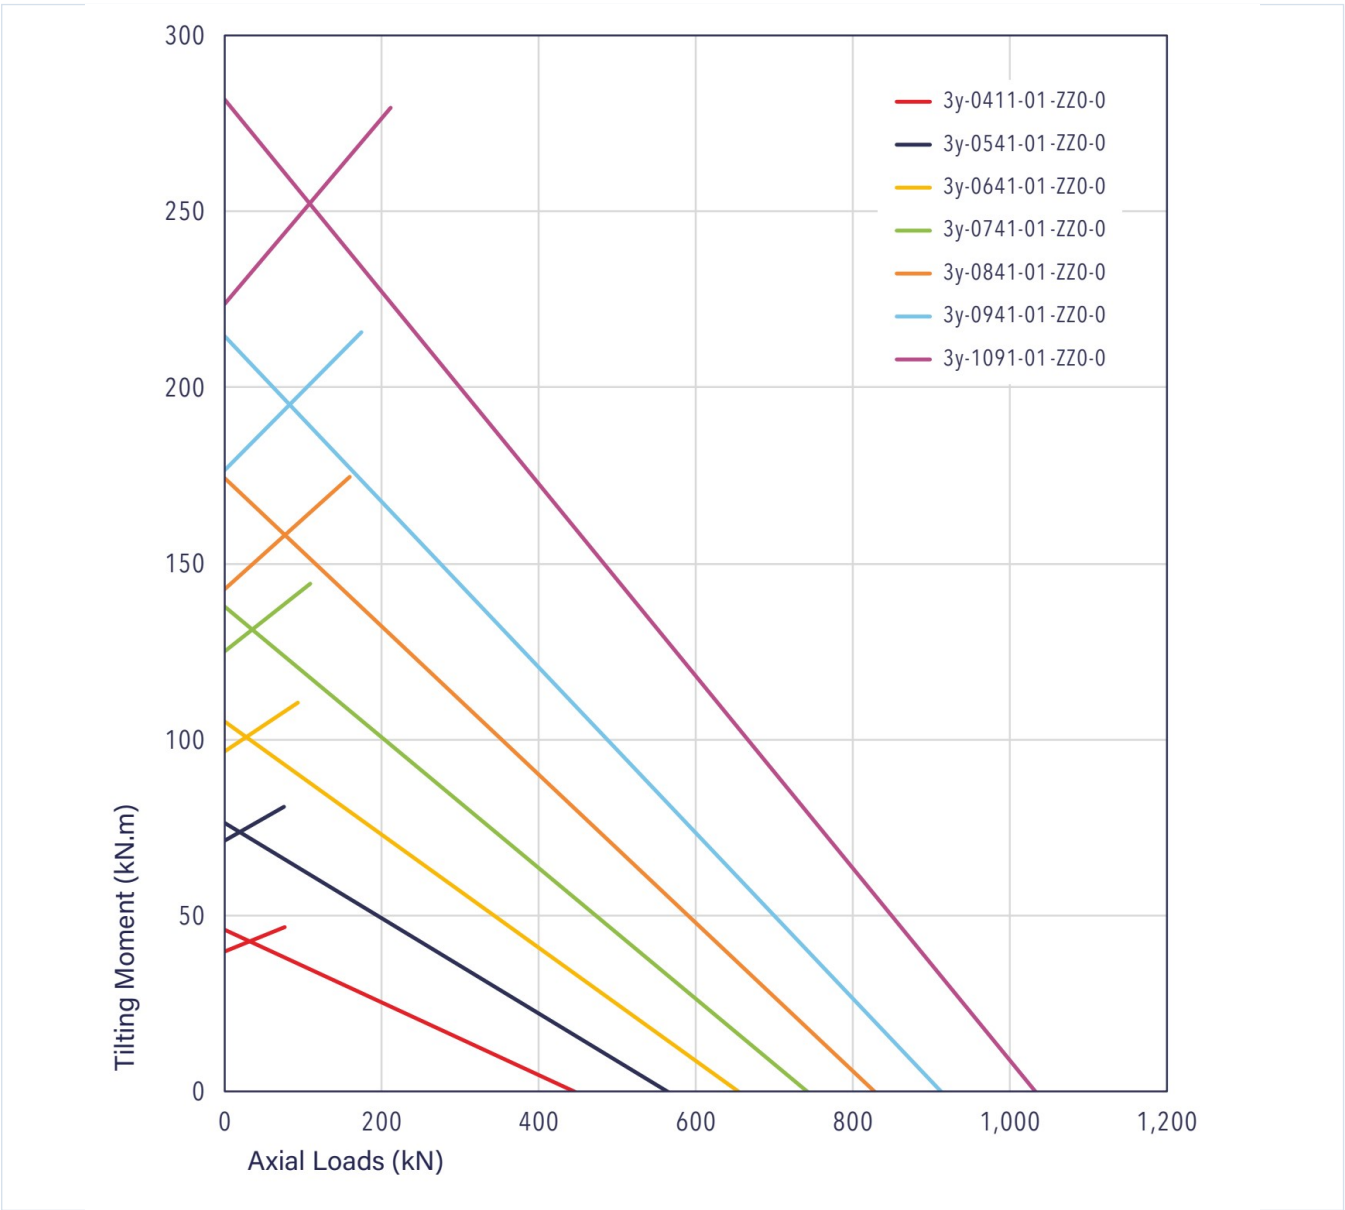

rollix-page-095-curve.webp | SHA-256: da39b5c4bb522fc898f6acb6a64369a174df31ad2edfdc3d64f0c45e4a403834

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

OUSK24AA5FXKDTATHAXEVEUMLX

SOURCE FILE

ROLLIX.pdf

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07

SOURCE LOCATION

PDF page 95 | Printed page 95

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/rollix/35-0411-01/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.