

Factory-Verified Replacement

MERYDOM 75-1427-00

Certified for interchange with ROLLIX 75-1427-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

75-1427-00

REFERENCE

ROLLIX 75-1427-00

SERIES

75 Series

STRUCTURE

Cuscinetto a rulli a due corone

OVERALL OD

1,579 mm

OVERALL ID

1,268 mm


OVERALL HEIGHT

131 mm

GEAR

Senza dentatura

Published Technical Drawing

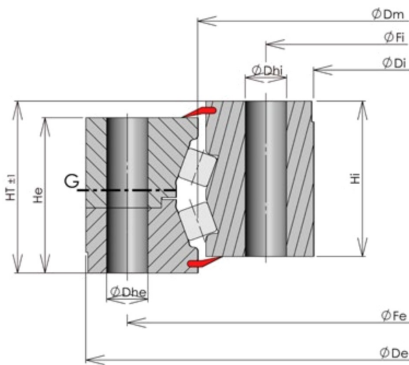

rollix-page-138-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	75-1427-00
Certified interchangeable with	ROLLIX 75-1427-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	CFS2TCF7N6K3HXCG3SY5PZJVQG
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	75 Series
Reference model	75-1427-00
Bearing structure	Cuscinetto a rulli a due corone
Gear arrangement	Senza dentatura
DIMENSION	
Overall height (HT)	131 mm
Overall outside diameter (Dia De)	1.579 mm
Outer ring height (He)	119 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	1.268 mm
Inner ring height (Hi)	119 mm
Assembly weight (Weight)	515 kg
MOUNTING	
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	1.519 mm
Outer ring mounting-hole count (Ne)	72
Outer ring mounting-hole specification (Dhe)	30 mm
Inner ring hole type (Inner ring hole type)	Th
Inner ring bolt circle (Dia Fi)	1.344 mm
Inner ring mounting-hole count (Ni)	72
Inner ring mounting-hole specification (Dhi)	30 mm
MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	E
Greasing hole type (Greasing hole type)	R
MOUNTING INTERFACES	
Outer ring mounting	72 holes - External ring hole type Th; Dhe 30 mm
Inner ring mounting	72 holes - Inner ring hole type Th; Dhi 30 mm
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	138
Printed page	138
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-138-curve.webp SHA-256: d4b5fbc46e84fab43507d7c4b1a8f638c2a12fa62dff61032087114edc480d06
Outline Drawing	rollix-page-138-drawing.webp SHA-256: 78c4af4e1dd71f87a51d762f0d79f6e5851945601fb8070f7d4c294cddda1ecc

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

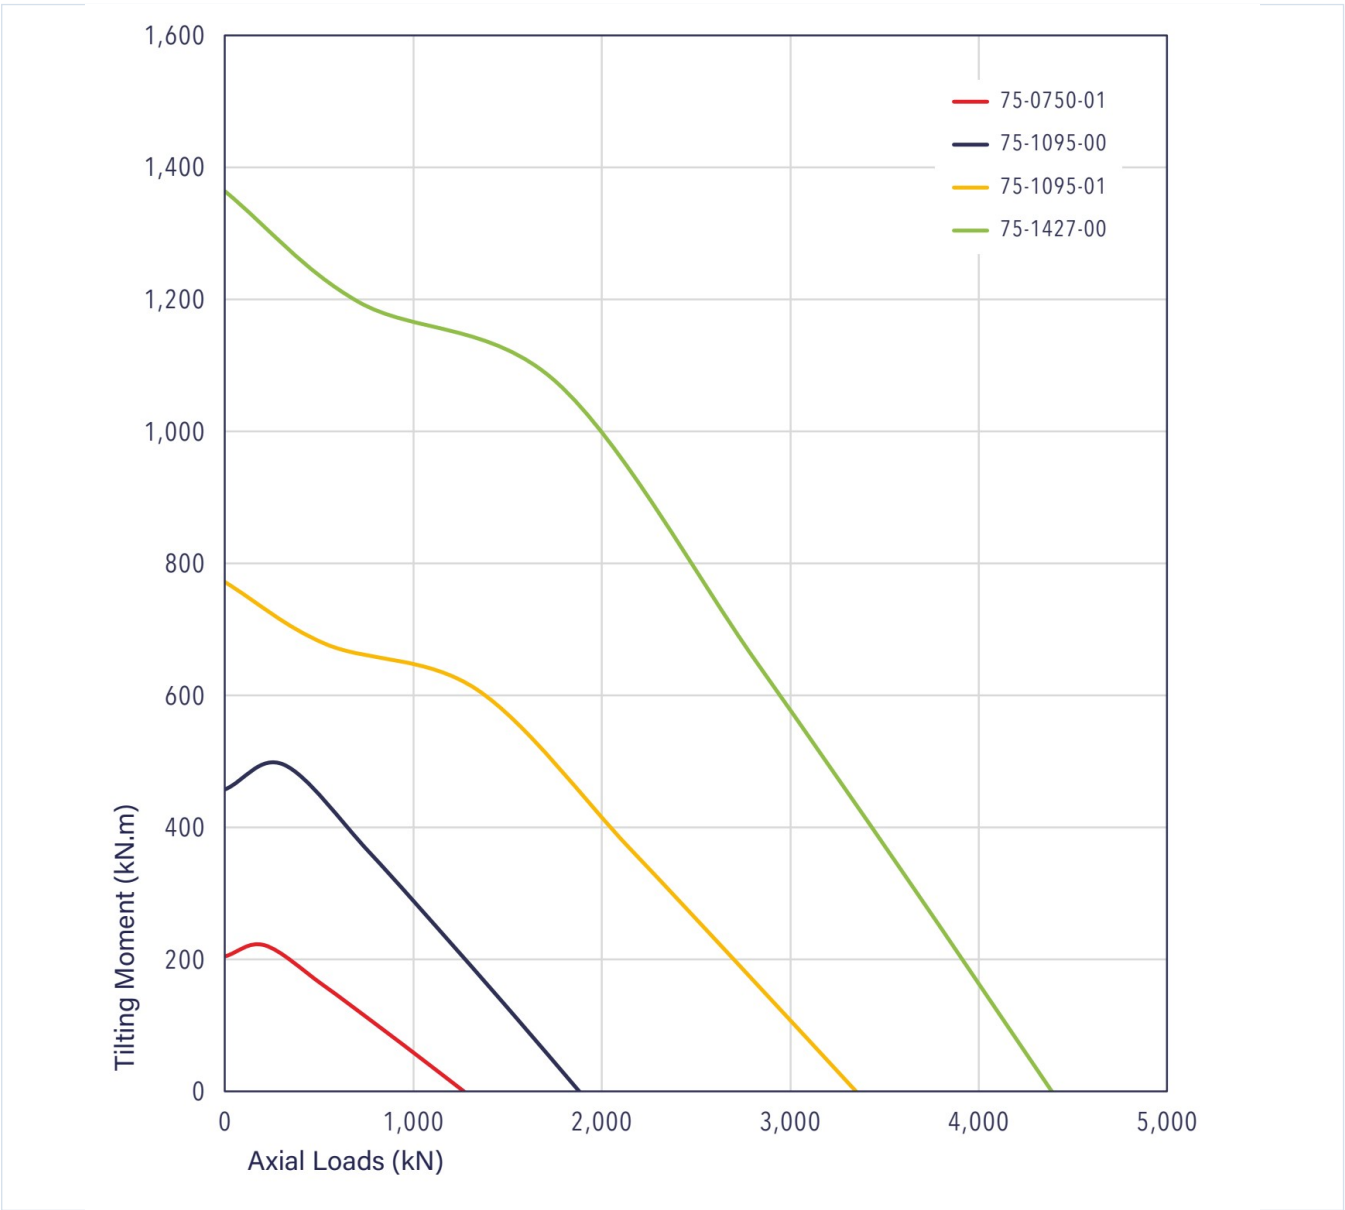

rollix-page-138-curve.webp | SHA-256: d4b5fbc46e84fab43507d7c4b1a8f638c2a12fa62dff61032087114edc480d06

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID CFS2TCF7N6K3HXCG3SY5PZJVQG	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 138 Printed page 138
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/rollix/75-1427-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.