

Factory-Verified Replacement

MERYDOM 061.30.1500.200.11.1504


Certified for interchange with Rothe Erde 061.30.1500.200.11.1504. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL	REFERENCE
061.30.1500.200.11.1504	Rothe Erde 061.30.1500.200.11.1504
SERIES	STRUCTURE
06 Series	Sfere a quattro punti di contatto a una corona
OVERALL OD	OVERALL ID
1,677.6 mm	1,388 mm
OVERALL HEIGHT	GEAR
89 mm	Dentatura esterna

Published Technical Drawing

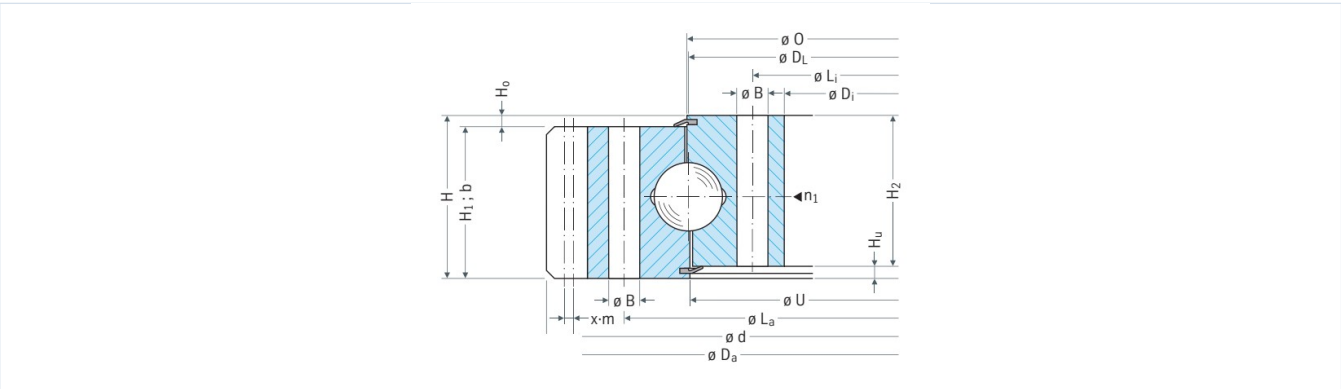

page-076-outline.png

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	061.30.1500.200.11.1504
Certified interchangeable with	Rothe Erde 061.30.1500.200.11.1504
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	FYRWRBC72TVZ3EFVUSALU7GZ6O
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Rothe Erde
Reference series	06 Series
Reference model	061.30.1500.200.11.1504
Bearing structure	Sfere a quattro punti di contatto a una corona
Gear arrangement	Dentatura esterna
DIMENSION	
Raceway diameter (DL)	1.500 mm
Overall outside diameter (Da)	1.677,6 mm
Overall inside diameter (Di)	1.388 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	89 mm
Catalog diameter O (O)	1.501 mm
Catalog diameter U (U)	1.498 mm
Ring height H1 (H1)	80 mm
Ring height H2 (H2)	63 mm
Lower ring offset Hu (Hu)	26 mm
Upper ring offset Ho (Ho)	9 mm
Assembly weight (Weight)	338 kg
MOUNTING	
Outer ring bolt circle (La)	1.568 mm
Inner ring bolt circle (Li)	1.432 mm
Common mounting-hole count (n)	48
Common mounting-hole diameter (B)	22 mm
Metric bolt nominal size (M)	20 mm
GEAR	
Gear pitch diameter (d)	1.644 mm
Gear module (m)	12 mm
Gear tooth count (z)	137
Profile shift product x m (x*m)	6 mm
Tip-height modification product k m (k*m)	-1,2 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR (CONTINUED)	
Minimum gear face width (bmin)	79 mm
PERFORMANCE	
Permitted circumferential force, normal (X1)	59,54 kN
Permitted circumferential force, maximum (X2)	119,07 kN
MISCELLANEOUS	
Grease nipple count (n1)	6
PERFORMANCE RATINGS	
Catalog Reference X1	59,54 kN Not simultaneous with other listed dynamic ratings
Catalog Reference X2	119,07 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	48 holes - M 20
Inner ring mounting	48 holes - B 22
GEAR INTERFACE	
Pitch system	module
Module reference	12 mm
Number of teeth	137
SOURCE TRACEABILITY	
Source document code	ROTHE_ERDE_CATALOG_2023
Source file	Rothe Erde.pdf
PDF page	76
Printed page	146-147

Complete Product Data


All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	page-076-load-curves.png SHA-256: 0a566c51d5cd0ea8e34cccf1c297d7cb0f7a9dfbd8cdef076ad423802803a56e
Outline Drawing	page-076-outline.png SHA-256: b0f781850d2bd40b880c1f0862ab92c39ef72ba9c414eec87c10b6cb876b4512


Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

Static boundary load curves

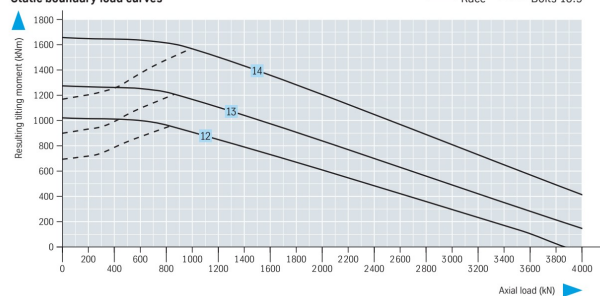

Utilization period curves – 30 000 revolutions

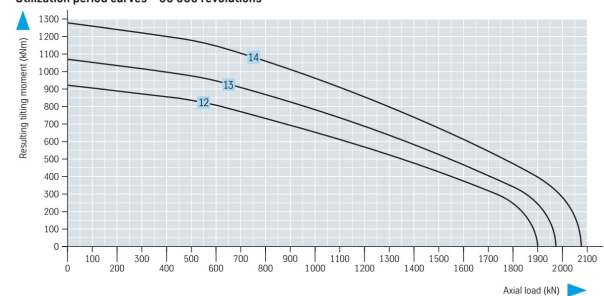

page-076-load-curves.png | SHA-256: 0a566c51d5cd0ea8e34cccf1c297d7cb0f7a9dfbd8cdef076ad423802803a56e

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**FYRWRBC72TVZ3EFVUSALU7GZ60****SOURCE DOCUMENT****ROTHE_ERDE_CATALOG_2023****SOURCE FILE****Rothe Erde.pdf****SOURCE LOCATION****PDF page 76 | Printed page 146-147****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page:

<https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/rothe-erde/061-30-1500-200-11-1504/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.