

Factory-Verified Replacement

MERYDOM RKS.062.20.1094

Certified for interchange with SKF RKS.062.20.1094. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

RKS.062.20.1094

REFERENCE

SKF RKS.062.20.1094

SERIES

SKF_BALL_MEDIUM_INTERNAL Series

STRUCTURE

Sfere a quattro punti di contatto

OVERALL OD

1,166 mm

OVERALL ID

985.6 mm


OVERALL HEIGHT

mm

GEAR

Dentatura interna

Published Technical Drawing

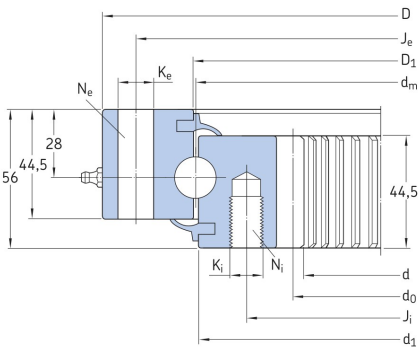

skf-p072-outline-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKS.062.20.1094
Certified interchangeable with	SKF RKS.062.20.1094
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	SRAH3AT2JA5UDCKPRFCCWYQGTE
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	SKF
Reference series	SKF_BALL_MEDIUM_INTERNAL Series
Reference model	RKS.062.20.1094
Bearing structure	Sfere a quattro punti di contatto
Gear arrangement	Dentatura interna
DIMENSION	
Raceway diameter (dm)	1.094 mm
Overall outside diameter (D)	1.166 mm
SKF catalogue dimension D1 (D1)	1.095,5 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (d)	985,6 mm
SKF catalogue dimension d1 (d1)	1.092,5 mm
Mass (Mass)	91 kg
MOUNTING	
Outer ring bolt circle (Je)	1 mm
Outer ring mounting-hole specification (Ke)	14.013,5 mm
Outer ring mounting-hole count (Ne)	48 count
Inner ring bolt circle (Ji)	1.055 mm
Inner ring mounting-hole specification (Ki)	M12 mm
Inner ring mounting-hole count (Ni)	48 count
PERFORMANCE	
Basic dynamic axial load rating (C)	303 kN
Basic static axial load rating (C0)	2.710 kN
PERFORMANCE RATINGS	
Basic Dynamic Axial	303 kN
Basic Static Axial	2.710 kN
MOUNTING INTERFACES	
Outer ring mounting	48 holes - 14013,5
Inner ring mounting	48 holes - M12
GEAR INTERFACE	


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE (CONTINUED)	
Pitch system	Not published
SOURCE TRACEABILITY	
Source document code	SKF_SLEWING_BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
Source file	SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf
PDF page	72
Printed page	72
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	skf-p073-load-curve.webp SHA-256: 4b36abe1a754a5f76d96560c758e4351c58d264a30309e79c771127b94e214de
Outline Drawing	skf-p072-outline-drawing.webp SHA-256: 830cadeb0c15d0e6c165a66426331190720ea875d6d356aa488ece826e52cbc1

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

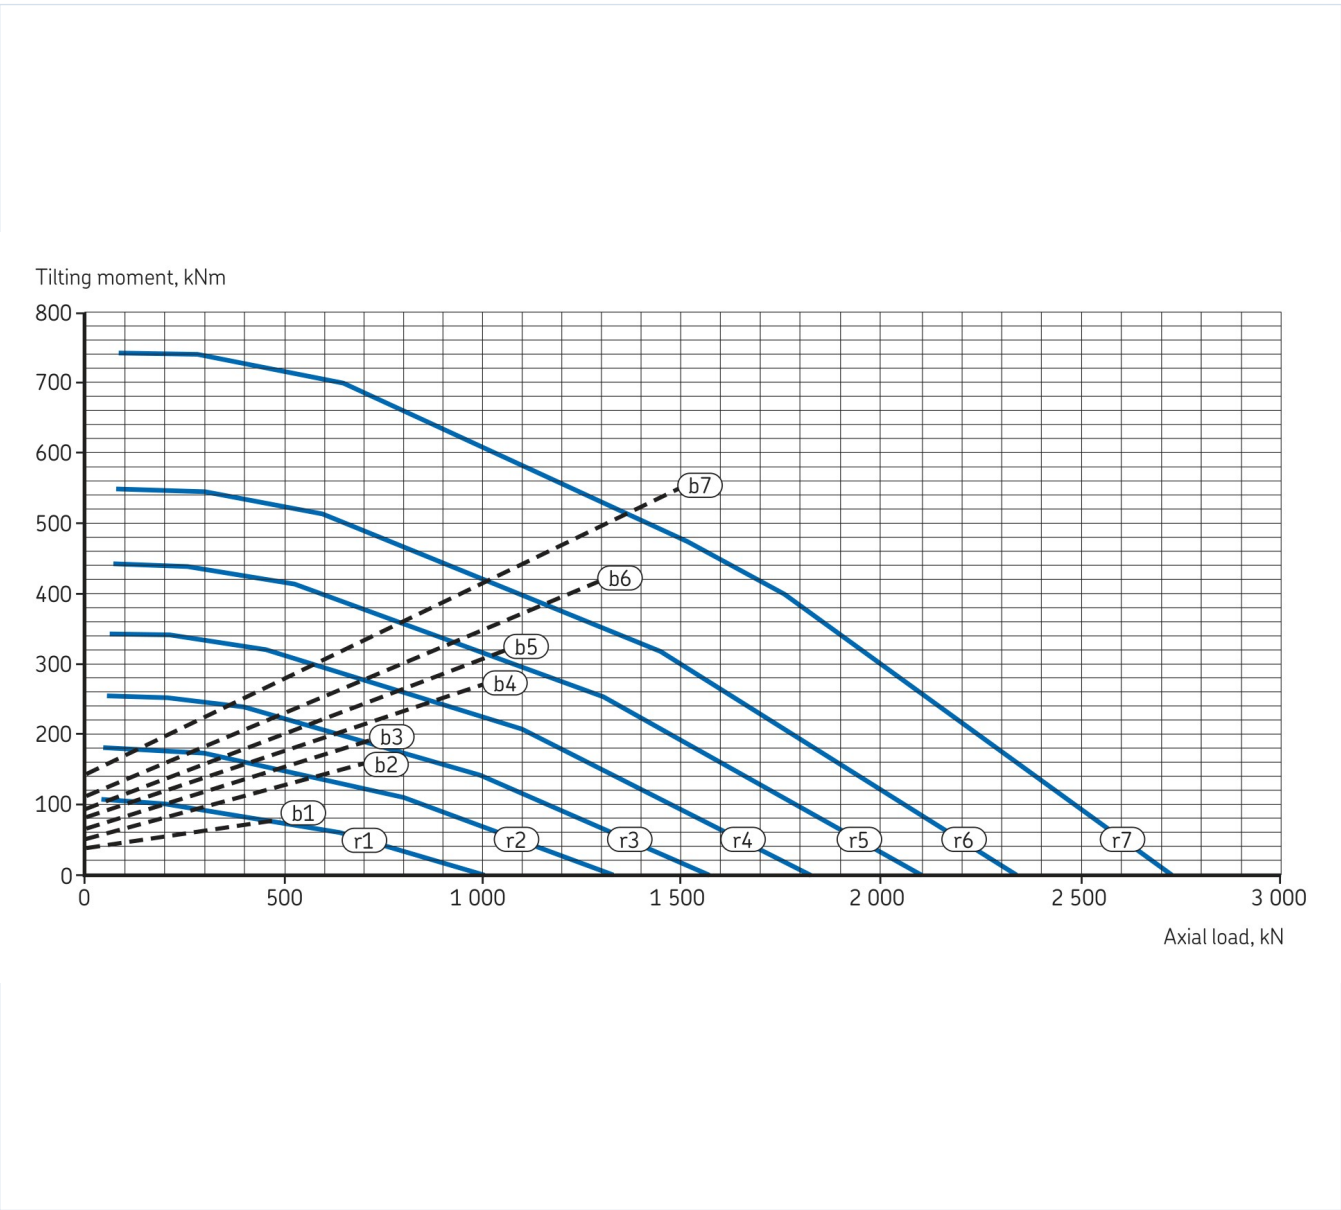

skf-p073-load-curve.webp | SHA-256: 4b36abe1a754a5f76d96560c758e4351c58d264a30309e79c771127b94e214de

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

SRAH3AT2JA5UDCKPRFCCWYQGTE

SOURCE FILE

SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

SKF_SLEWING BEARINGS_PUB_BU_P2_06115_3_EN_2019_09

SOURCE LOCATION

PDF page 72 | Printed page 72

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/skf/rks-062-20-1094/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.