

Factory-Verified Replacement

MERYDOM RKS.324012324001

Certified for interchange with SKF RKS.324012324001. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

RKS.324012324001

REFERENCE

SKF RKS.324012324001

SERIES

SKF_ROLLER_CUSTOM_EXTERNAL Series

STRUCTURE

Crossed Cylindrical Roller

OVERALL OD

1,289.5 mm

OVERALL ID

980 mm


OVERALL HEIGHT

114 mm

GEAR

Dentatura esterna

Published Technical Drawing

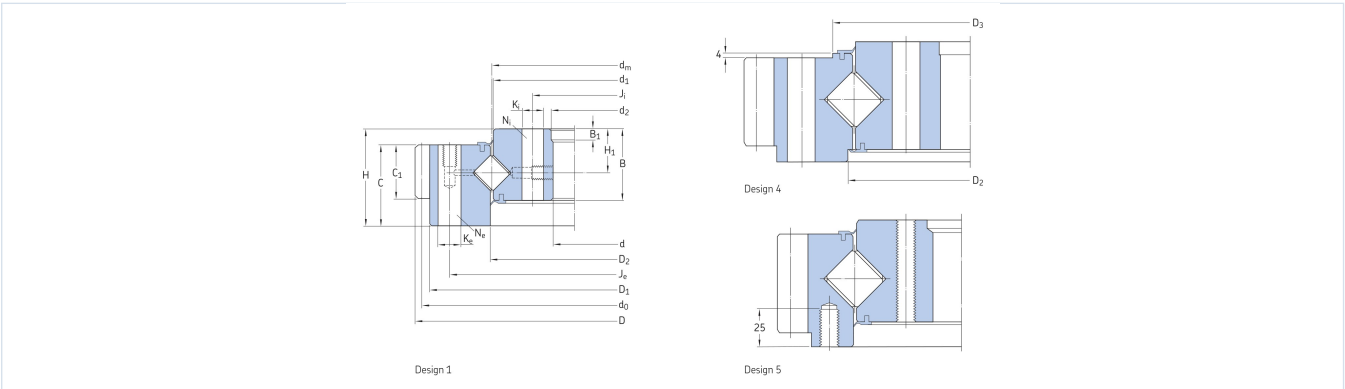

skf-p106-outline-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKS.324012324001
Certified interchangeable with	SKF RKS.324012324001
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	WKKZNFHCUXDM42BBAPCNBJTTX3
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	SKF
Reference series	SKF_ROLLER_CUSTOM_EXTERNAL Series
Reference model	RKS.324012324001
Bearing structure	Crossed Cylindrical Roller
Gear arrangement	Dentatura esterna
DIMENSION	
Raceway diameter (dm)	1.117 mm
Overall outside diameter (D)	1.289,5 mm
Overall inside diameter (d)	980 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	114 mm
SKF catalogue dimension H1 (H1)	60 mm
SKF catalogue dimension D1 (D1)	1.240 mm
SKF catalogue dimension D2 (D2)	1.119 mm
SKF catalogue dimension C (C)	-90 mm
SKF catalogue dimension C1 (C1)	75 mm
SKF catalogue dimension d1 (d1)	1 mm
SKF catalogue dimension d2 (d2)	115.985 mm
SKF catalogue dimension B (B)	96 mm
SKF catalogue dimension B1 (B1)	10 mm
Mass (Mass)	330 kg
PERFORMANCE	
Basic dynamic axial load rating (C)	1.090 kN
Basic static axial load rating (C0)	4.100 kN
PERFORMANCE RATINGS	
Basic Dynamic Axial	1.090 kN
Basic Static Axial	4.100 kN
MOUNTING INTERFACES	
Outer ring mounting	holes -
Inner ring mounting	holes -

Complete Product Data


All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE	
Pitch system	Not published
SOURCE TRACEABILITY	
Source document code	SKF_SLEWING_BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
Source file	SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf
PDF page	106
Printed page	106
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	skf-p107-load-curve.webp SHA-256: f582c56fb901ce99dac7df230ed007d311549f50838c566d8a1e05b7d573b023
Outline Drawing	skf-p106-outline-drawing.webp SHA-256: 10ab43a5aca8fa148552c335abb3b148d95d8be27f905abbe5540c31b8e63322

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

Tilting moment, kNm

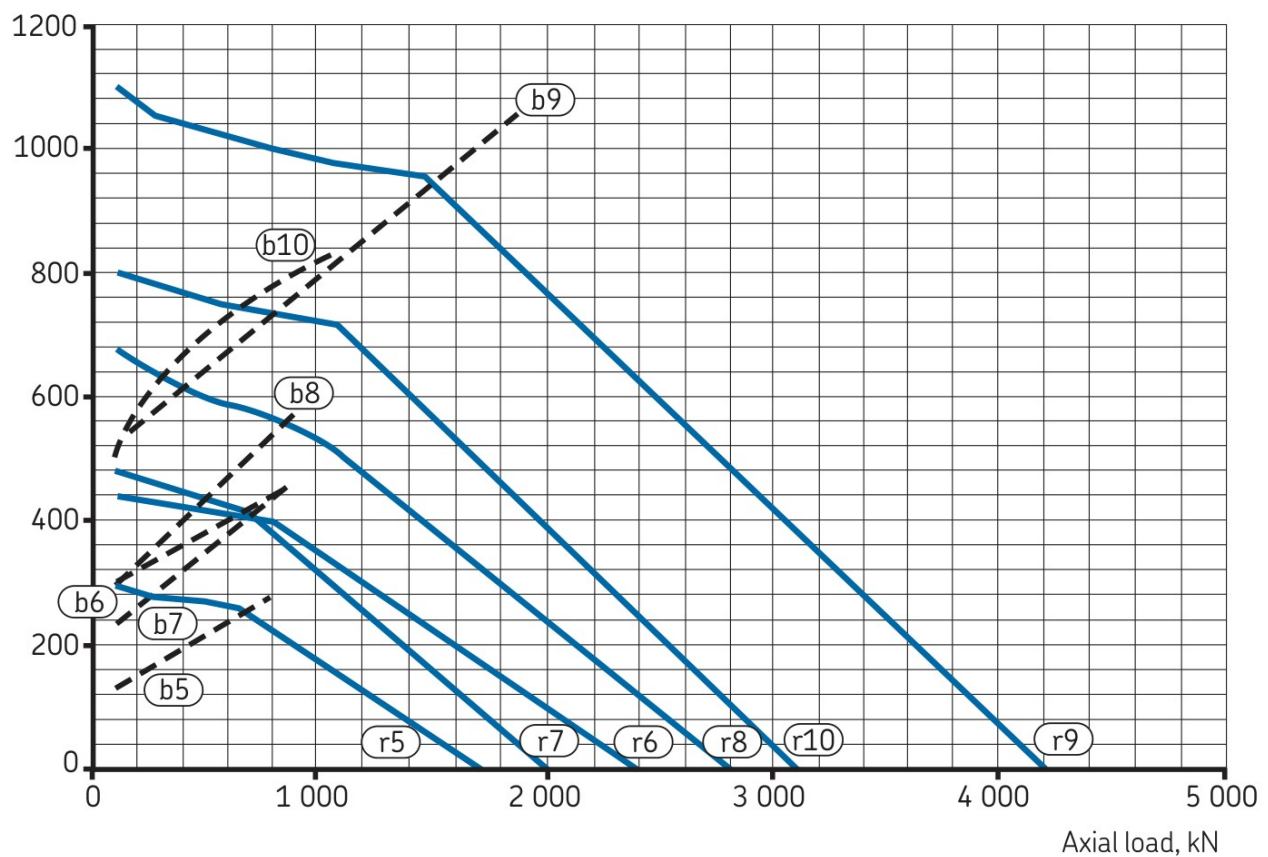

skf-p107-load-curve.webp | SHA-256: f582c56fb901ce99dac7df230ed007d311549f50838c566d8a1e05b7d573b023

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

WKKZNFHCUXDM42BBAPCNBJTTX3

SOURCE FILE

SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

SKF_SLEWING BEARINGS_PUB_BU_P2_06115_3_EN_2019_09

SOURCE LOCATION

PDF page 106 | Printed page 106

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/skf/rks-324012324001/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.