

Factory-Verified Replacement

MERYDOM 1044I-12B-100

Certified for interchange with Tibet Makina 1044I-12B-100. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

1044I-12B-100

REFERENCE

Tibet Makina 1044I-12B-100

SERIES

L_INTERNAL Series

STRUCTURE

Single Row Ball Profile

OVERALL OD

1,150 mm

OVERALL ID

936 mm


OVERALL HEIGHT

56 mm

GEAR

Dentatura interna

Published Technical Drawing

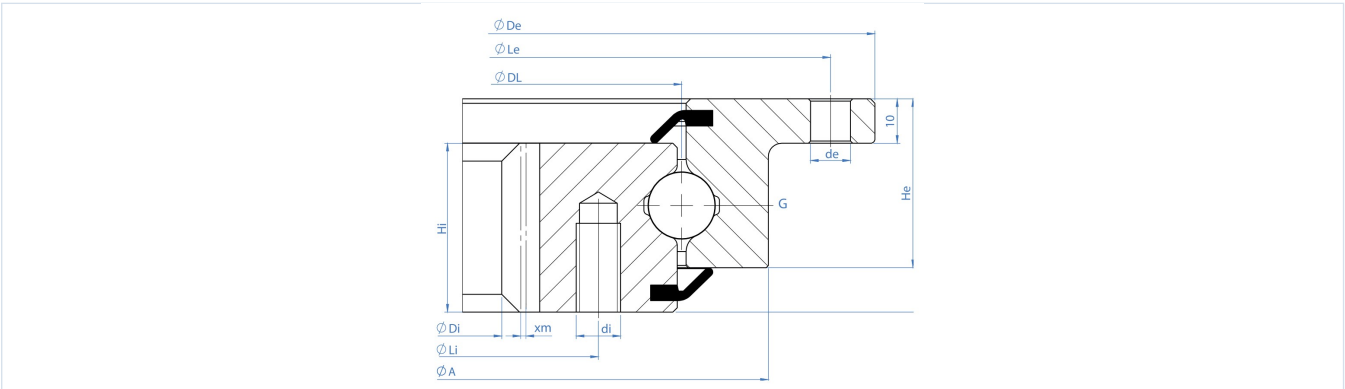

I_internal-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	1044I-12B-100
Certified interchangeable with	Tibet Makina 1044I-12B-100
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	N3YQDYEM6MDCIHGT62BHGNPSSM
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Tibet Makina
Reference series	L_INTERNAL Series
Reference model	1044I-12B-100
Bearing structure	Single Row Ball Profile
Gear arrangement	Dentatura interna
DIMENSION	
Mass (Kg)	89 kg
Overall outside diameter (De)	1.150 mm
Overall inside diameter (Di)	936 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Tibet catalogue dimension A (A)	1.083 mm
Overall height (H)	56 mm
Outer ring height (He)	46 mm
Inner ring height (Hi)	46 mm
MOUNTING	
Outer ring bolt circle (La)	1.120 mm
Inner ring bolt circle (Li)	1.000 mm
Outer ring mounting-hole count (ne)	32
Inner ring mounting-hole count (ni)	24
Outer ring mounting-hole specification (de)	18 mm
Inner ring mounting-hole specification (di)	M12 mm
GEAR	
Gear module (m)	8 mm
Gear tooth count (z)	119
PERFORMANCE	
Normal tooth force (Ft_normal)	20 kN
Maximum tooth force (Ft_max)	40 kN
MISCELLANEOUS	
Raceway Pitch Diameter (DL)	1.044 mm
Lubrication Zerk Count (G)	4


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS	
Rating Tooth Force Normal	20 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	40 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	32 holes - de 18 mm
Inner ring mounting	24 holes - di M12 mm
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	119
SOURCE TRACEABILITY	
Source document code	TIBET_MAKINA_2015_CATALOG
Source file	tibet_makina_2015.pdf
PDF page	35
Printed page	35
Source language	TR-EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	I_internal-static-load-curve.webp SHA-256: 27f41d99aaa336f85df9f1e001953068a2498ce71eb148989f04bf7c59 efa497
Outline Drawing	I_internal-drawing.webp SHA-256: a5e82a5eb2a7a7b70e4283e05e3d839839982c0a9530ba6bcd3dc36b51 436133

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

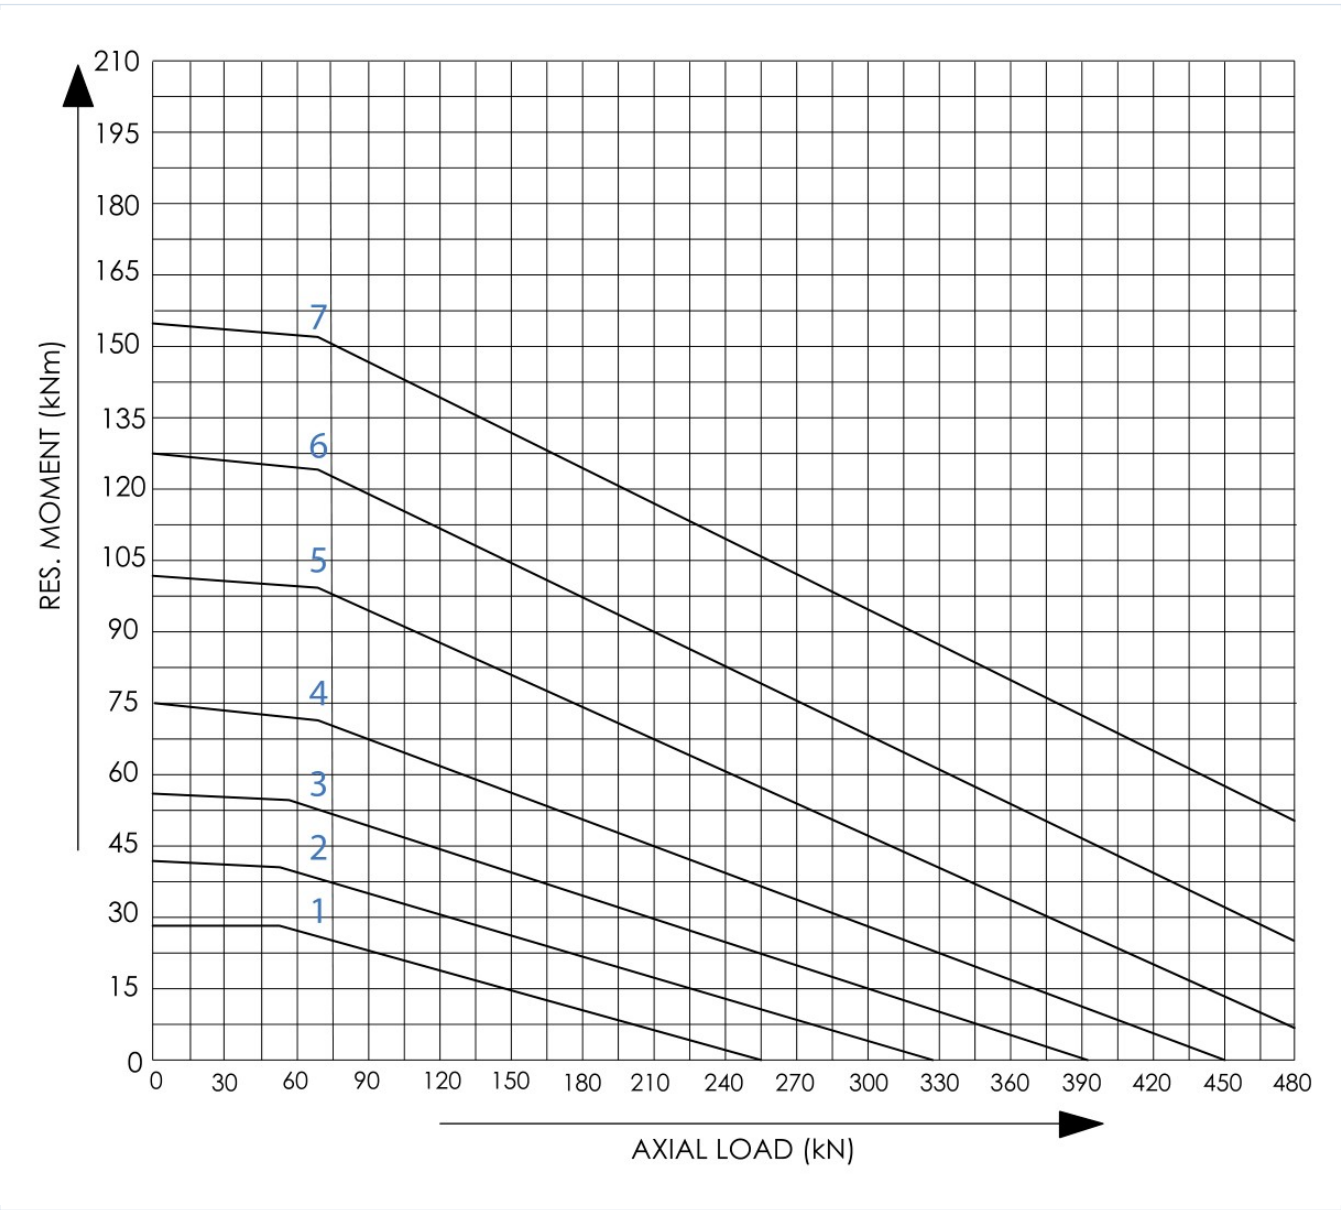

I_internal-static-load-curve.webp | SHA-256: 27f41d99aaa336f85df9f1e001953068a2498ce71eb148989f04bf7c59efa497

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**N3YQDYEM6MDCIHGT62BHGNPSSM****SOURCE DOCUMENT****TIBET_MAKINA_2015_CATALOG****SOURCE FILE****tibet_makina_2015.pdf****SOURCE LOCATION****PDF page 35 | Printed page 35****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/tibet-makina/1044i-12b-100/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.