

Factory-Verified Replacement

MERYDOM 10-20 0411/0-02012

Certified for interchange with IMO 10-20 0411/0-02012.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle,
mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

10-20 0411/0-02012

REFERENCE

IMO 10-20 0411/0-02012

SERIES

120 Series

STRUCTURE

Four-point contact ball

OVERALL OD

486 mm

OVERALL ID

342 mm


OVERALL HEIGHT

mm

GEAR

Ungeared

Published Technical Drawing



imo-10200411002012-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	10-20 0411/0-02012
Certified interchangeable with	IMO 10-20 0411/0-02012
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	73A2X26WEPCAE5BC7J3SJXO2ED
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	120 Series
Reference model	10-20 0411/0-02012
Bearing structure	Four-point contact ball
Gear arrangement	Ungeared
DIMENSION	
Overall outside diameter (Da)	486 mm
Overall inside diameter (di)	342 mm
Assembly weight (G)	29 kg

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING	
Outer ring bolt circle (La)	460 mm
Outer ring mounting-hole count (na)	24
Inner ring bolt circle (Li)	368 mm
Inner ring mounting-hole count (ni)	24
PERFORMANCE	
Static radial load rating (Co_rad)	254 kN
Static axial load rating (Co_ax)	592 kN
Dynamic radial load rating (C_rad)	156 kN
Dynamic axial load rating (C_ax)	156 kN
PERFORMANCE RATINGS	
Co Rad	254 kN Not simultaneous with other listed dynamic ratings
Co Ax	592 kN Not simultaneous with other listed dynamic ratings
C Rad	156 kN Not simultaneous with other listed dynamic ratings
C Ax	156 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	24 holes - See source drawing
Inner ring mounting	24 holes - See source drawing
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source document code	IMO_SINGLE_ROW_BALL_EN
Source file	imo_dkugeldrehverbindungen_einreihig-en.pdf
PDF page	7
Printed page	Not published
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-10200411002012-curve.webp SHA-256: 472c16cf7930cb934a75f73e47cbc73ee1f45abc17485ca2a871a7b0ec e72f10
Outline Drawing	imo-10200411002012-drawing.webp SHA-256: b01d470388a54b4acad6a260485219bad528dfaae9a617241304423e67 038959

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

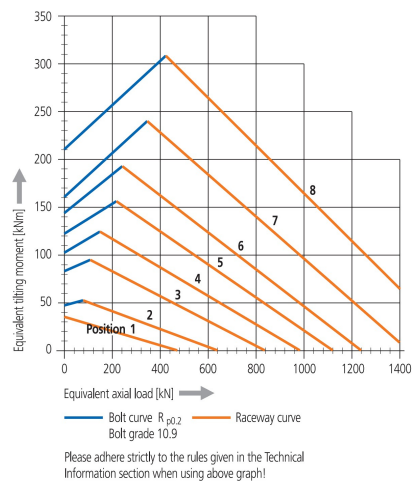

Radial clearance: 0 - 0.2 mm
Axial clearance: 0 - 0.4 mm
Bearing ring material: C45N
4 Taper type grease nipples on circumference
Mounting holes equally spaced
Raceway system supplied pre-lubricated
Dimensions without tolerances DIN ISO 2768 coarse

imo-10200411002012-curve.webp | SHA-256: 472c16cf7930cb934a75f73e47cbc73ee1f45abc17485ca2a871a7b0ece72f10

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID 73A2X26WEPCAE5BC7J3SJXO2ED	SOURCE DOCUMENT IMO_SINGLE_ROW_BALL_EN
SOURCE FILE imo_dkugeldrehverbindungen_einreihig-en.pdf	SOURCE LOCATION PDF page 7 Printed page Not published
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/imo/10-20-0411-0-02012/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.