

MERYDOM 11-25 0309/1-03312

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

11-25 0309/1-03312

REFERENCE

IMO 11-25 0309/1-03312

SERIES

OTHER_STANDARD_BALL Series

STRUCTURE

Four-point contact ball

OVERALL OD

mm

OVERALL ID

mm


OVERALL HEIGHT

mm

GEAR

External gear

Published Technical Drawing



imo-11250309103312-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	11-25 0309/1-03312
Certified interchangeable with	IMO 11-25 0309/1-03312
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	JCYOKXUFRZ5J6GNYJJN4HBLRWM
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	OTHER_STANDARD_BALL Series
Reference model	11-25 0309/1-03312
Bearing structure	Four-point contact ball
Gear arrangement	External gear
DIMENSION	
Assembly weight (G)	7.5 kg
MOUNTING	
Outer ring mounting-hole count (na)	16

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING (CONTINUED)	
Inner ring mounting-hole count (ni)	15*
GEAR	
Gear module (m)	4 mm
Gear tooth count (z)	62
Addendum modification coefficient (x)	0.5
PERFORMANCE	
Permitted circumferential force, normal (fz_norm)	8 kN
Permitted circumferential force, maximum (fz_max)	16 kN
Static radial load rating (Co_rad)	143 kN
Static axial load rating (Co_ax)	384 kN
Dynamic radial load rating (C_rad)	121 kN
Dynamic axial load rating (C_ax)	141 kN
PERFORMANCE RATINGS	
Fz Norm	8 kN Not simultaneous with other listed dynamic ratings
Fz Max	16 kN Not simultaneous with other listed dynamic ratings
Co Rad	143 kN Not simultaneous with other listed dynamic ratings
Co Ax	384 kN Not simultaneous with other listed dynamic ratings
C Rad	121 kN Not simultaneous with other listed dynamic ratings
C Ax	141 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING INTERFACES (CONTINUED)	
Outer ring mounting	16 holes - See source drawing
Inner ring mounting	15 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	4 mm
Number of teeth	62
SOURCE TRACEABILITY	
Source document code	IMO_OTHER_STANDARD_BALL_EN
Source file	imo_weitere_standard-kugeldrehverbindungen-en.pdf
PDF page	15
Printed page	Not published
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-11250309103312-curve.webp SHA-256: 0d5d32d7d3d642c6f8429d0dfcc40ff541f2eaa116d2f076f092f57d0e719bc5
Outline Drawing	imo-11250309103312-drawing.webp SHA-256: 247197692ae2e7d3403331134054c6f6893c8324e0a629d18538eef070253cc9

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

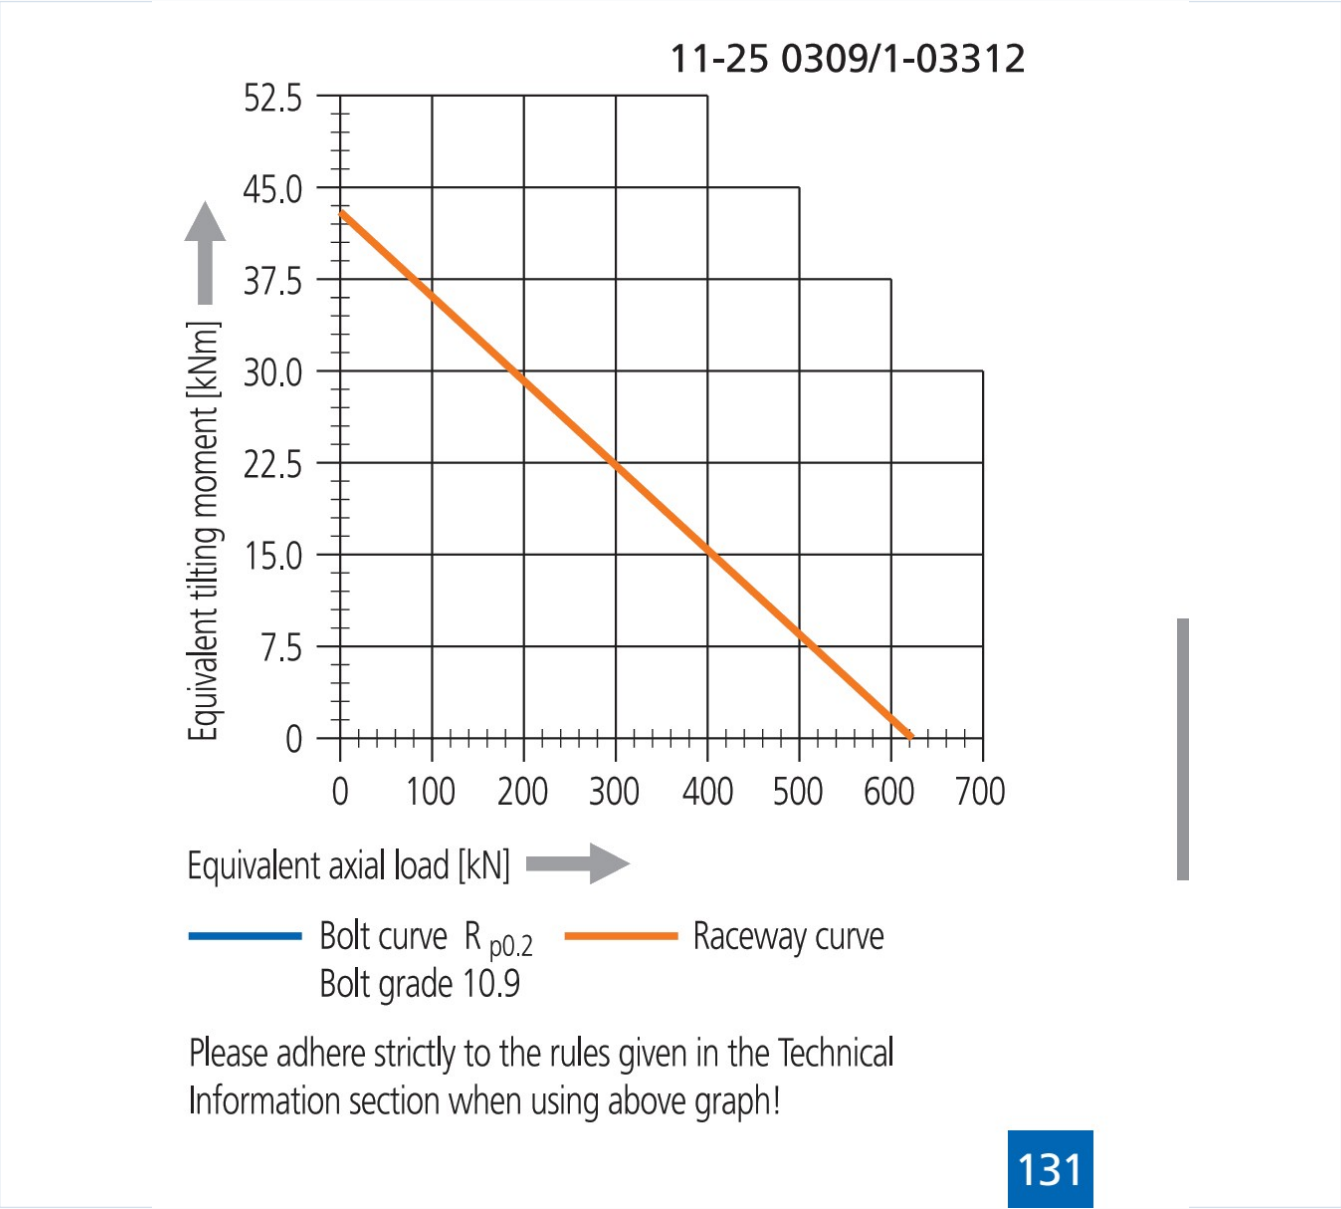

imo-11250309103312-curve.webp | SHA-256: 0d5d32d7d3d642c6f8429d0dfcc40ff541f2eaa116d2f076f092f57d0e719bc5

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID JCYOKXUFRZ5J6GNYJJN4HBLRWM	SOURCE DOCUMENT IMO_OTHER_STANDARD_BALL_EN
SOURCE FILE imo_weitere_standard-kugeldrehverbindungen-en.pdf	SOURCE LOCATION PDF page 15 Printed page Not published
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/imo/11-25-0309-1-03312/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.