

Factory-Verified Replacement

MERYDOM 12-22 0782/2-01218


Certified for interchange with IMO 12-22 0782/2-01218.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL	REFERENCE
12-22 0782/2-01218	IMO 12-22 0782/2-01218
SERIES	STRUCTURE
OTHER_STANDARD_BALL Series	Four-point contact ball
OVERALL OD	OVERALL ID
mm	mm
OVERALL HEIGHT	GEAR
mm	Internal gear

Published Technical Drawing

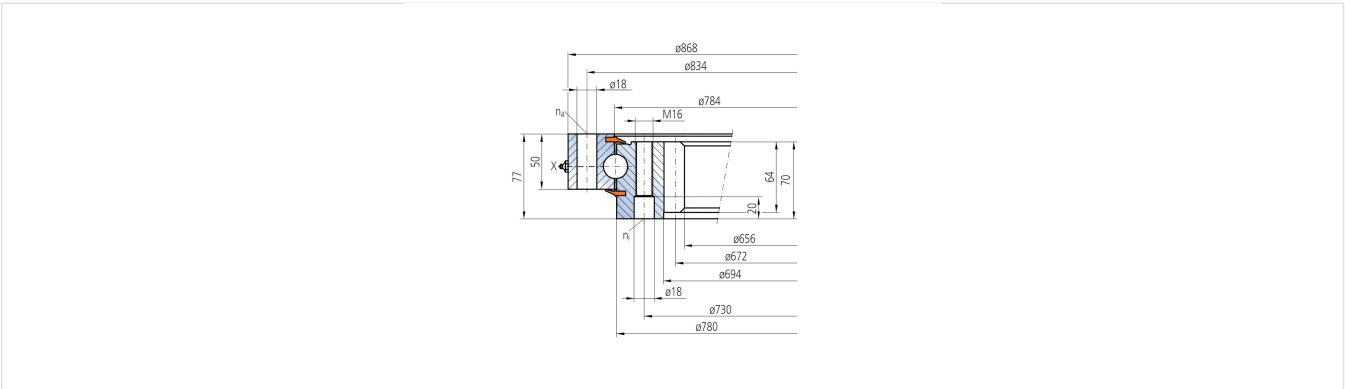

imo-12220782201218-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	12-22 0782/2-01218
Certified interchangeable with	IMO 12-22 0782/2-01218
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	MVJ6Y4VONXHYEWGL4AIQ6T7XDJ
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	OTHER_STANDARD_BALL Series
Reference model	12-22 0782/2-01218
Bearing structure	Four-point contact ball
Gear arrangement	Internal gear
DIMENSION	
Assembly weight (G)	126 kg
MOUNTING	
Outer ring mounting-hole count (na)	36

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING (CONTINUED)	
Inner ring mounting-hole count (ni)	36
GEAR	
Gear module (m)	8 mm
Gear tooth count (z)	100
PERFORMANCE	
Permitted circumferential force, normal (fz_norm)	41 kN
Permitted circumferential force, maximum (fz_max)	74 kN
Static radial load rating (Co_rad)	660 kN
Static axial load rating (Co_ax)	176 kN
Dynamic radial load rating (C_rad)	312 kN
Dynamic axial load rating (C_ax)	363 kN
PERFORMANCE RATINGS	
Fz Norm	41 kN Not simultaneous with other listed dynamic ratings
Fz Max	74 kN Not simultaneous with other listed dynamic ratings
Co Rad	660 kN Not simultaneous with other listed dynamic ratings
Co Ax	176 kN Not simultaneous with other listed dynamic ratings
C Rad	312 kN Not simultaneous with other listed dynamic ratings
C Ax	363 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	36 holes - See source drawing


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING INTERFACES (CONTINUED)	
Inner ring mounting	36 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	100
SOURCE TRACEABILITY	
Source document code	IMO_OTHER_STANDARD_BALL_EN
Source file	imo_weitere_standard-kugeldrehverbindungen-en.pdf
PDF page	27
Printed page	Not published
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-12220782201218-curve.webp SHA-256: 350ffa5d30b2f58a7ab34133de372c0c7943ca7e3efe2324409d8af774 ec37ec
Outline Drawing	imo-12220782201218-drawing.webp SHA-256: 2b7bdb8f528293e877e419e0ed9ecef7a24da55079cc909d519dda3556 4af7b1

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

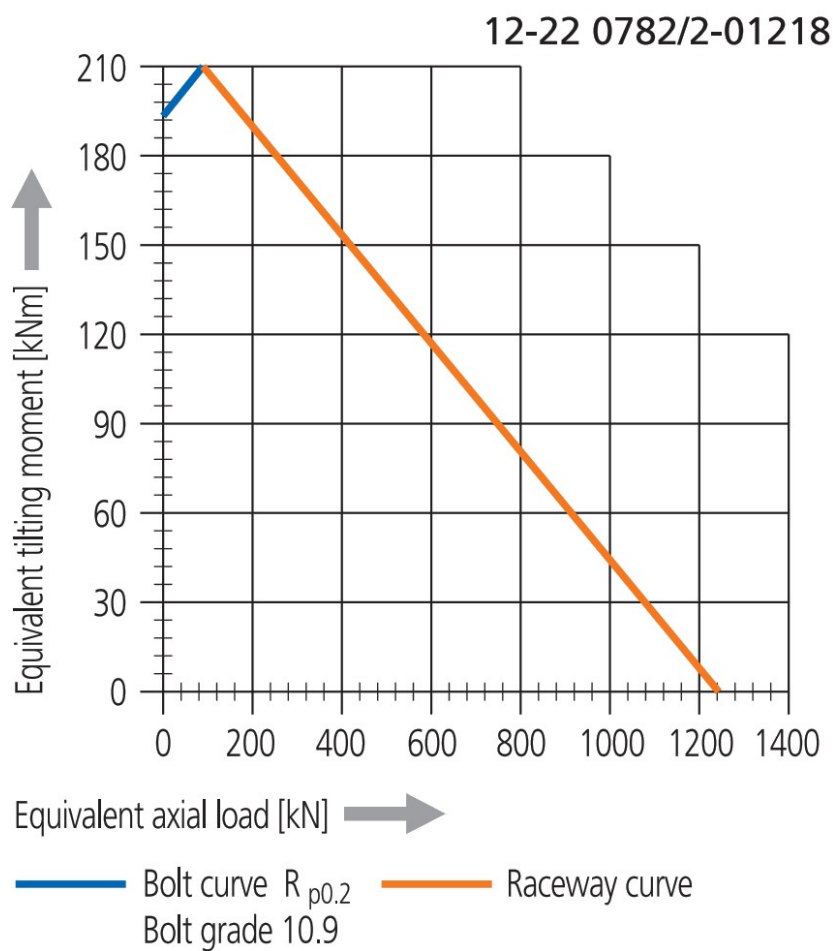

Please adhere strictly to the rules given in the Technical Information section when using above graph!

imo-12220782201218-curve.webp | SHA-256: 350ffa5d30b2f58a7ab34133de372c0c7943ca7e3efe2324409d8af774ec37ec

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID MVJ6Y4VONXHYEWGL4AIQ6T7XDJ	SOURCE DOCUMENT IMO_OTHER_STANDARD_BALL_EN
SOURCE FILE imo_weitere_standard-kugeldrehverbindungen-en.pdf	SOURCE LOCATION PDF page 27 Printed page Not published
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/imo/12-22-0782-2-01218/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.