

Factory-Verified Replacement

MERYDOM 31-40 3550/2-07440

Certified for interchange with IMO 31-40 3550/2-07440.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle,
mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

31-40 3550/2-07440

REFERENCE

IMO 31-40 3550/2-07440

SERIES

340 Series

STRUCTURE

Three-row roller

OVERALL OD

3,911.6 mm

OVERALL ID

3,312 mm


OVERALL HEIGHT

mm

GEAR

External gear

Published Technical Drawing



imo-31403550207440-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	31-40 3550/2-07440
Certified interchangeable with	IMO 31-40 3550/2-07440
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	WEZWYWC2B7QY4ALLOY6NSZJYZP
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	340 Series
Reference model	31-40 3550/2-07440
Bearing structure	Three-row roller
Gear arrangement	External gear
DIMENSION	
Overall outside diameter (Da)	3,911.6 mm
Overall inside diameter (di)	3,312 mm
Assembly weight (G)	4,255 kg

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING	
Outer ring bolt circle (La)	3,715 mm
Inner ring bolt circle (Li)	3,390 mm
Outer ring mounting-hole count (na)	66
GEAR	
Gear pitch diameter (d)	3,850 mm
Gear module (m)	22 mm
Gear tooth count (z)	175
Addendum modification coefficient (x)	0.5
PERFORMANCE	
Permitted circumferential force, normal (fz_norm)	338 kN
Permitted circumferential force, maximum (fz_max)	605 kN
Static radial load rating (Co_rad)	2,975 kN
Static axial load rating, tension (Co_ax_T)	35,465 kN
Static axial load rating, compression (Co_ax_H)	19,251 kN
Dynamic radial load rating (C_rad)	1,265 kN
Dynamic axial load rating, tension (C_ax_T)	6,268 kN
Dynamic axial load rating, compression (C_ax_H)	4,605 kN
PERFORMANCE RATINGS	
Fz Norm	338 kN Not simultaneous with other listed dynamic ratings
Fz Max	605 kN Not simultaneous with other listed dynamic ratings

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS (CONTINUED)	
Co Rad	2,975 kN Not simultaneous with other listed dynamic ratings
Co Ax T	35,465 kN Not simultaneous with other listed dynamic ratings
Co Ax H	19,251 kN Not simultaneous with other listed dynamic ratings
C Rad	1,265 kN Not simultaneous with other listed dynamic ratings
C Ax T	6,268 kN Not simultaneous with other listed dynamic ratings
C Ax H	4,605 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	66 holes - See source drawing
Inner ring mounting	holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	22 mm
Number of teeth	175
SOURCE TRACEABILITY	
Source document code	IMO_TRIPLE_ROW_ROLLER_EN
Source file	imo_rollendrehverbindung-en.pdf
PDF page	9
Printed page	Not published
Source language	EN
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-31403550207440-curve.webp SHA-256: af7870c3b822781584a12c9a045a5691ff08e5119a9637b500682b1503e28283
Outline Drawing	imo-31403550207440-drawing.webp SHA-256: 8f585ced0929924bc03dec92a38e86c901a4352e7dfc43e29b6746b00807b865

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

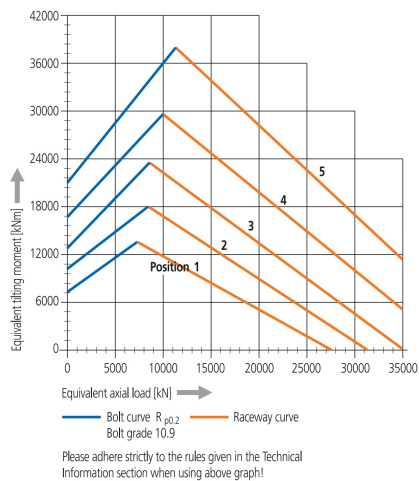

Bearing ring material: 42CrMo4V
7 to 14 Taper type grease nipples on each circumferential row
Mounting holes equally spaced
Raceway system supplied pre-lubricated
Dimensions without tolerances DIN ISO 2768 coarse

Clearances

Position	Radial clearance	Axial clearance
1	max. 0.40	max. 0.13
2	max. 0.50	max. 0.15
3	max. 0.50	max. 0.15
4	max. 0.50	max. 0.17
5	max. 0.60	max. 0.20

imo-31403550207440-curve.webp | SHA-256: af7870c3b822781584a12c9a045a5691ff08e5119a9637b500682b1503e28283

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID WEZWYWC2B7QY4ALLOY6NSZJYZP	SOURCE DOCUMENT IMO_TRIPLE_ROW_ROLLER_EN
SOURCE FILE imo_rollendrehverbindung-en.pdf	SOURCE LOCATION PDF page 9 Printed page Not published
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/imo/31-40-3550-2-07440/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.