

MERYDOM 192.32.4000.990.41.1502

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	192.32.4000.990.41.1502
Certified interchangeable with	Rothe Erde 192.32.4000.990.41.1502
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	BGZKXFD4WZJW4NETLDONEN2QIH
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Rothe Erde
Reference series	19 Series
Reference model	192.32.4000.990.41.1502
Bearing structure	Three-row roller
Gear arrangement	Internal gear
DIMENSION	
Raceway diameter (DL)	4,000 mm
Overall outside diameter (Da)	4,218 mm
Overall inside diameter (Di)	3,652 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	181 mm
Catalog diameter O (O)	3,959 mm
Catalog diameter U (U)	3,970 mm
Ring height H1 (H1)	139 mm
Ring height H2 (H2)	172 mm
Lower ring offset Hu (Hu)	9 mm
Upper ring offset Ho (Ho)	42 mm
Assembly weight (Weight)	3,664 kg
MOUNTING	
Outer ring bolt circle (La)	4,140 mm
Inner ring bolt circle (Li)	3,845 mm
Common mounting-hole count (n)	72
Common mounting-hole diameter (B)	39 mm
Metric bolt nominal size (M)	36 mm
GEAR	
Gear pitch diameter (d)	3,674 mm
Gear module (m)	22 mm
Gear tooth count (z)	167
Profile shift product x m (x*m)	-11 mm
Minimum gear face width (bmin)	138 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE	
Permitted circumferential force, normal (X1)	264 kN
Permitted circumferential force, maximum (X2)	528 kN
MISCELLANEOUS	
Grease nipple count (n1)	9
PERFORMANCE RATINGS	
Catalog Reference X1	264 kN Not simultaneous with other listed dynamic ratings
Catalog Reference X2	528 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	72 holes - B 39
Inner ring mounting	72 holes - M 36
GEAR INTERFACE	
Pitch system	module
Module reference	22 mm
Number of teeth	167
SOURCE TRACEABILITY	
Source document code	ROTHE_ERDE_CATALOG_2023
Source file	Rothe Erde.pdf
PDF page	100
Printed page	194-195
Source language	EN
Original unit system	Metric

Complete Product Data


All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	page-100-load-curves.png SHA-256: c8b63bd6a0daded262212a5cb609dc263444093f55f2a204aa999e8d2b a3b5c9
Outline Drawing	page-100-outline.png SHA-256: ad0e900339c1e9b6d101a05817bde85c95059d9cc3fd91962cc615ba56 6bfcbc


Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

Static boundary load curves

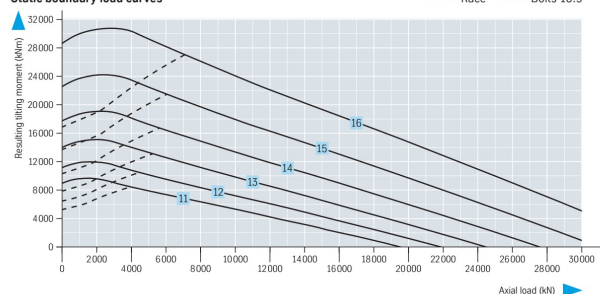

Utilization period curves – 30 000 revolutions

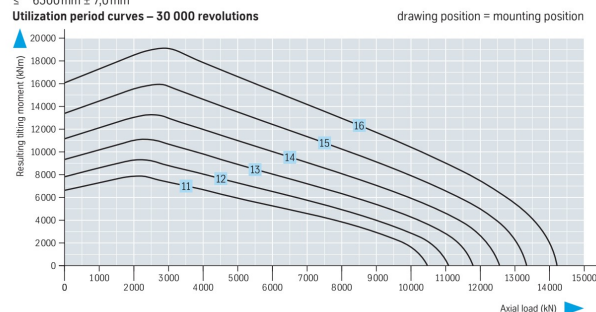

page-100-load-curves.png | SHA-256: c8b63bd6a0daded262212a5cb609dc263444093f55f2a204aa999e8d2ba3b5c9

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID BGZKXFD4WZJW4NETLDONEN2QIH	SOURCE DOCUMENT ROTHE_ERDE_CATALOG_2023
SOURCE FILE Rothe Erde.pdf	SOURCE LOCATION PDF page 100 Printed page 194-195
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/rothe-erde/192-32-4000-990-41-1502/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.