

Factory-Verified Replacement

MERYDOM RKS.161.14.0414

Certified for interchange with SKF RKS.161.14.0414. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

RKS.161.14.0414

REFERENCE

SKF RKS.161.14.0414

SERIES

SKF_ROLLER_MEDIUM_EXTERNAL Series

STRUCTURE

Crossed Cylindrical Roller

OVERALL OD

504 mm

OVERALL ID

344 mm


OVERALL HEIGHT

mm

GEAR

External gear

Published Technical Drawing

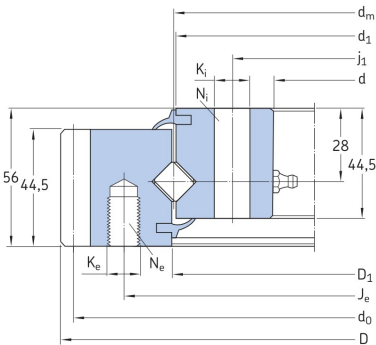

skf-p092-outline-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKS.161.14.0414
Certified interchangeable with	SKF RKS.161.14.0414
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	CI7XJ62T6V76BGEJM3C7ZI7BBS
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	SKF
Reference series	SKF_ROLLER_MEDIUM_EXTERNAL Series
Reference model	RKS.161.14.0414
Bearing structure	Crossed Cylindrical Roller
Gear arrangement	External gear
DIMENSION	
Raceway diameter (dm)	414 mm
Overall outside diameter (D)	504 mm
SKF catalogue dimension D1 (D1)	416 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (d)	344 mm
SKF catalogue dimension d1 (d1)	412 mm
Mass (Mass)	32 kg
MOUNTING	
Outer ring bolt circle (Je)	455 mm
Outer ring mounting-hole specification (Ke)	M mm
Outer ring mounting-hole count (Ne)	1,220 count
Inner ring bolt circle (Ji)	368 mm
Inner ring mounting-hole specification (Ki)	14 mm
Inner ring mounting-hole count (Ni)	24 count
PERFORMANCE	
Basic dynamic axial load rating (C)	167 kN
Basic static axial load rating (C0)	595 kN
PERFORMANCE RATINGS	
Basic Dynamic Axial	167 kN
Basic Static Axial	595 kN
MOUNTING INTERFACES	
Outer ring mounting	1220 holes - M
Inner ring mounting	24 holes - 14
GEAR INTERFACE	


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE (CONTINUED)	
Pitch system	Not published
SOURCE TRACEABILITY	
Source document code	SKF_SLEWING_BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
Source file	SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf
PDF page	92
Printed page	92
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	skf-p093-load-curve.webp SHA-256: 8546ae3029216351be8a53b5126b69b37aad9df1ec5bc23b52987a327f ebe333
Outline Drawing	skf-p092-outline-drawing.webp SHA-256: fe440cbd6a57abd8279bd41e276ae48c2704b299fc8eeb90cc42baf988 58562c

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

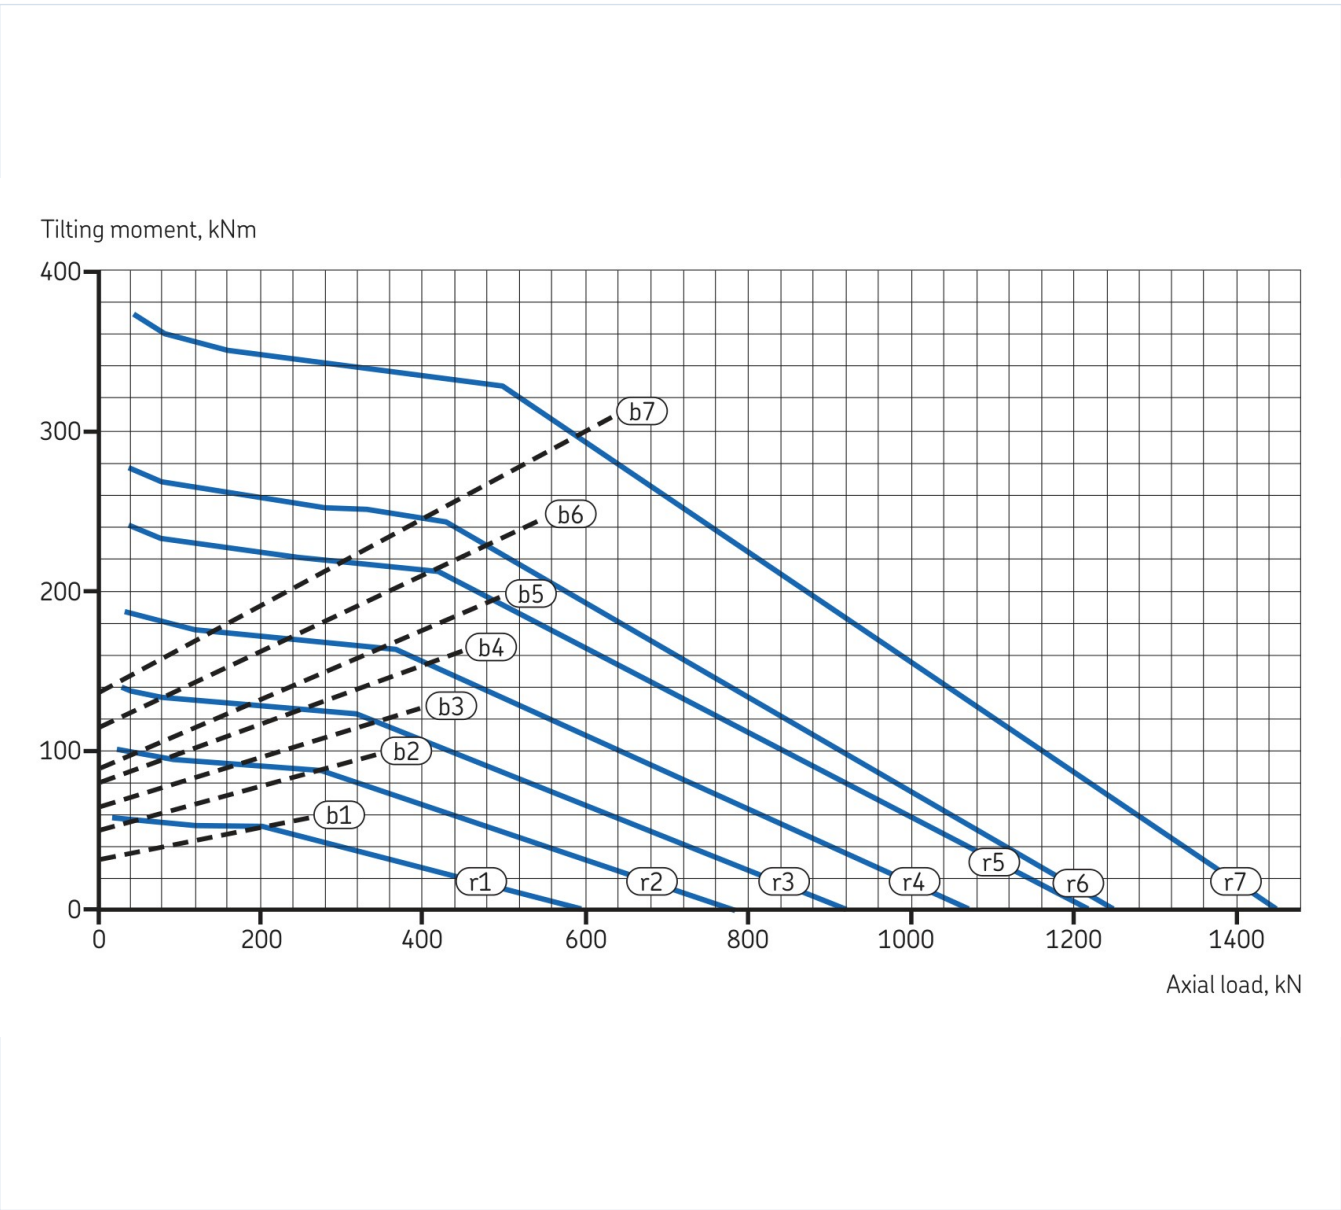

skf-p093-load-curve.webp | SHA-256: 8546ae3029216351be8a53b5126b69b37aad9df1ec5bc23b52987a327febe333

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID CI7XJ62T6V76BGEJM3C7ZI7BBS	SOURCE DOCUMENT SKF_SLEWING BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
SOURCE FILE SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf	SOURCE LOCATION PDF page 92 Printed page 92
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/skf/rks-161-14-0414/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.