

MERYDOM SD.1500.32.00.C

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL
SD.1500.32.00.C

REFERENCE

Torriani Gianni SD.1500.32.00.C

SERIES
SD_32_C Series

STRUCTURE

Four-point contact ball

OVERALL OD
1,500 mm

OVERALL ID
1,205 mm


OVERALL HEIGHT

mm

GEAR

Ungeared

Published Technical Drawing

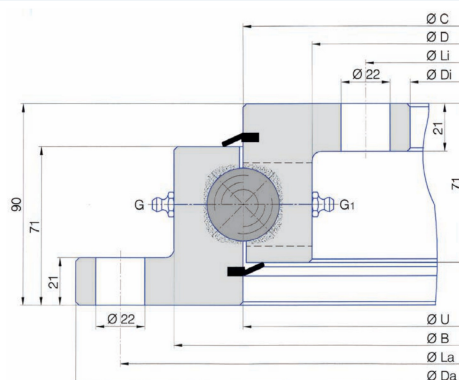

sd_32_c-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	SD.1500.32.00.C
Certified interchangeable with	Torriani Gianni SD.1500.32.00.C
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	SUYOGI5HO475H4BTHLFTLRFSPT
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Torriani Gianni
Reference series	SD_32_C Series
Reference model	SD.1500.32.00.C
Bearing structure	Four-point contact ball
Gear arrangement	Ungeared
DIMENSION	
Overall outside diameter (Da)	1,500 mm
Torriani catalogue dimension B (B)	1,417 mm
Torriani catalogue dimension U (U)	1,355 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Torriani catalogue dimension C (C)	1,355 mm
Torriani catalogue dimension D (D)	1,293 mm
Overall inside diameter (Di)	1,205 mm
Mass (Kg)	186 kg
MOUNTING	
Outer ring bolt circle (La)	1,460 mm
Outer ring mounting-hole count (na)	42
Inner ring bolt circle (Li)	1,245 mm
Inner ring mounting-hole count (ni)	42
MOUNTING INTERFACES	
Outer ring mounting	42 holes -
Inner ring mounting	42 holes -
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	TORRIANI_GIANNI_BALL_BEARINGS_CATALOG
Source file	catalogo-torriani-cuscinetti-a-sfere.pdf
PDF page	32
Printed page	32
Source language	IT-EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	sd_32_c-static-load-curve.webp SHA-256: bfeacdaf125dba9d47cf879d43ca84d29bf82128e2b8e39fe1acffe15111453
Outline Drawing	sd_32_c-drawing.webp SHA-256: eac00954c90ec5414d63b09b9da78ad6e372afc49aeb3cdbdf99c09625ae521f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

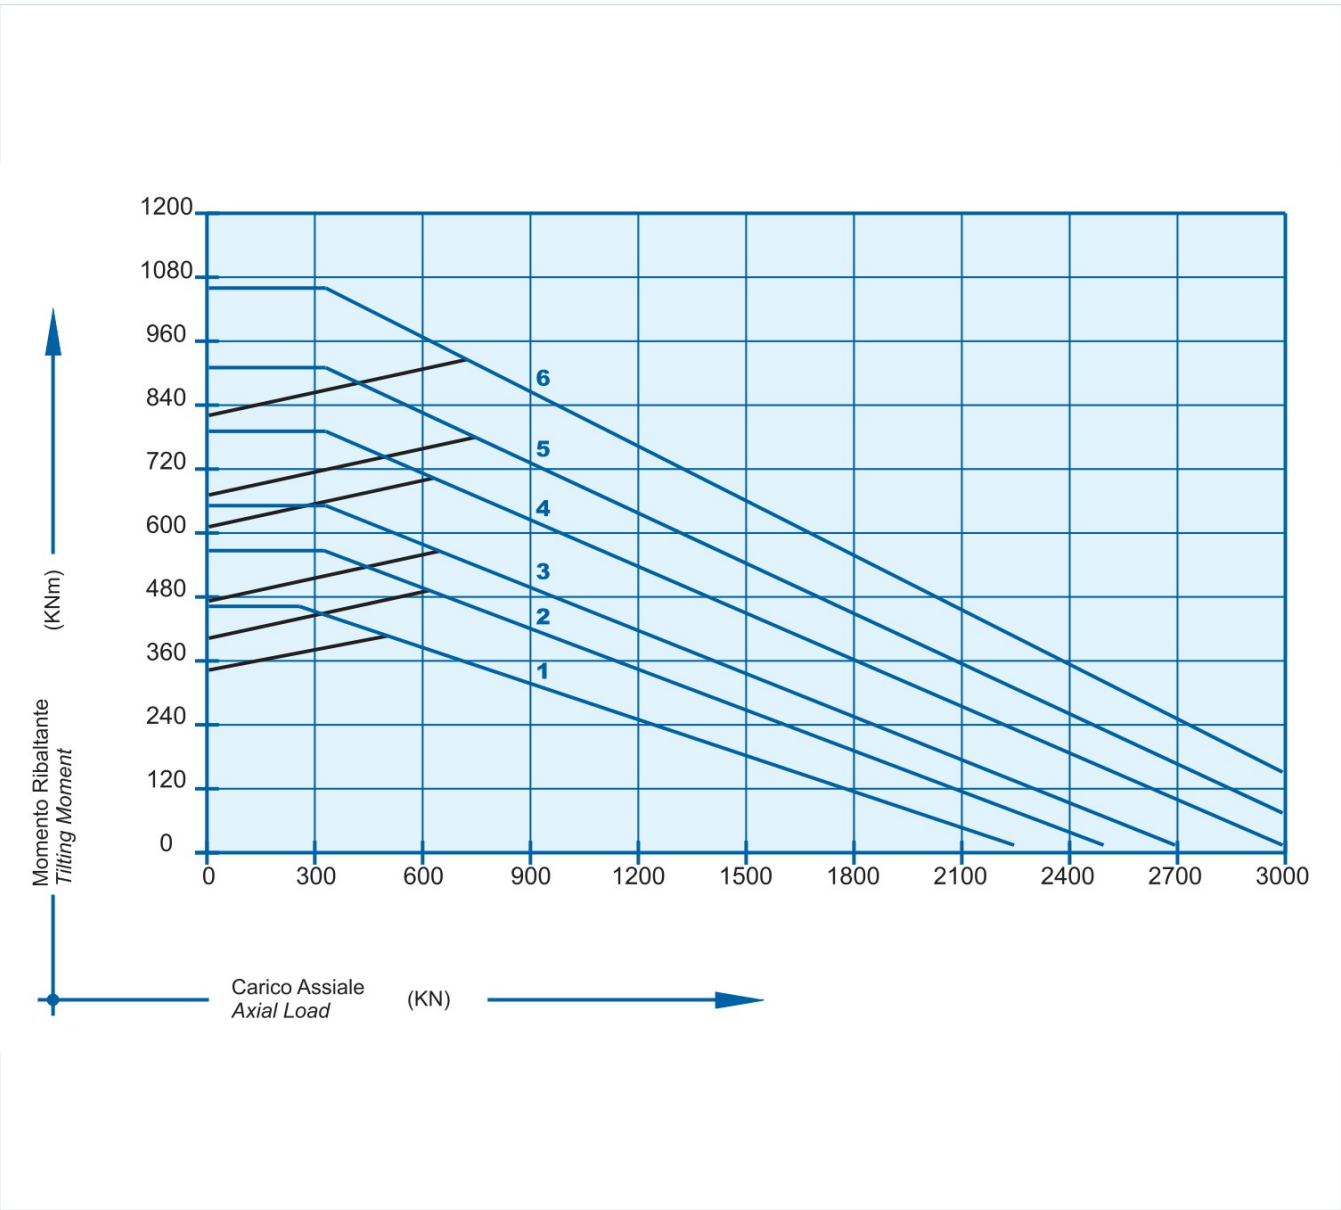

sd_32_c-static-load-curve.webp | SHA-256: bfeacdaf125dba9d47cf879d43ca84d29bf82128e2b8e39fe1acffe15111453

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID SUYOGI5HO475H4BTHLFTLRFSPT	SOURCE DOCUMENT TORRIANI_GIANNI_BALL_BEARINGS_CATALOG
SOURCE FILE catalogo-torriani-cuscinetti-a-sfere.pdf	SOURCE LOCATION PDF page 32 Printed page 32
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/torriani-gianni/sd-1500-32-00-c/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.