

Factory-Verified Replacement

MERYDOM VSI 250755 N

Certified for interchange with INA VSI 250755 N. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VSI 250755 N

SERIES

VSI 25 Series

OVERALL OD

855 mm

OVERALL HEIGHT

mm

REFERENCE

INA VSI 250755 N

STRUCTURE

Esferas de contato de quatro pontos


OVERALL ID

610 mm

GEAR

Engrenagem interna

Published Technical Drawing

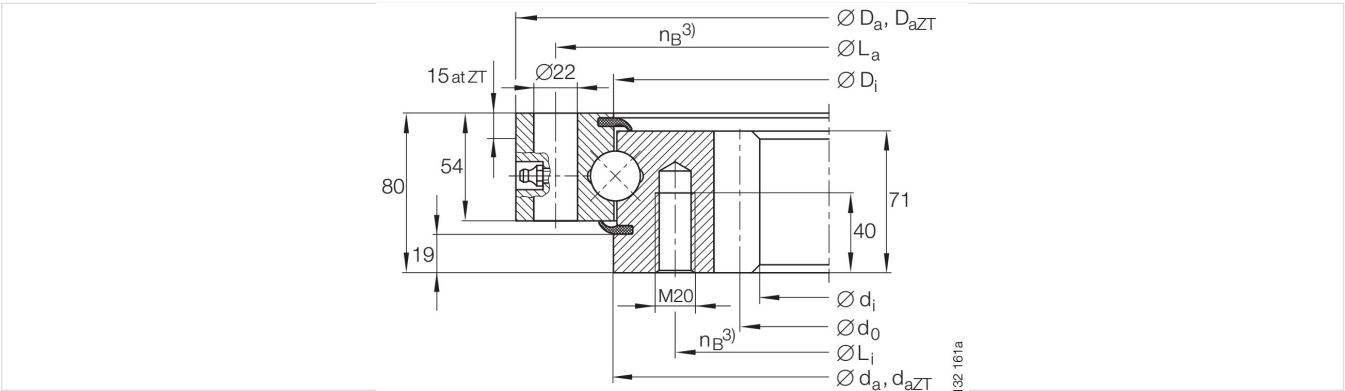

ina-g08-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VSI 250755 N
Certified interchangeable with	INA VSI 250755 N
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	T5VERM7JT4FZSYW5ZCZSKW6E56
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	INA
Reference series	VSI 25 Series
Reference model	VSI 250755 N
Bearing structure	Esferas de contato de quatro pontos
Gear arrangement	Engrenagem interna
DIMENSION	
Mass (Mass)	119 kg
Overall outside diameter (Da)	855 mm
Outside centring diameter (DaZT)	853 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (di)	610 mm
Catalog diameter Di (Di)	753 mm
Catalog diameter da (da)	757 mm
Catalog centring diameter daZT (daZT)	755 mm
MOUNTING	
Outer ring bolt circle (La)	815 mm
Inner ring bolt circle (Li)	694 mm
Common mounting-hole count (nB)	24
GEAR	
Gear pitch diameter (d0)	630 mm
Gear module (m)	10 mm
Gear tooth count (z)	63
PERFORMANCE	
Maximum permissible radial load (Fr perm)	290,4 kN
Normal tooth force (Fznorm)	68 kN
Maximum tooth force (Fzmax)	98,9 kN
Basic dynamic axial load rating (Ca)	460 kN
Basic static axial load rating (C0a)	2.250 kN
Basic dynamic radial load rating (Cr)	300 kN
Basic static radial load rating (C0r)	1.010 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Radial clearance (Radial clearance)	0,03 incl. 0,13 mm
Axial tilting clearance (Axial tilting clearance)	0,05 incl. 0,24 mm
PERFORMANCE RATINGS	
Rating Radial Static	1.010 kN Not simultaneous with other listed dynamic ratings
Rating Axial Static	2.250 kN Not simultaneous with other listed dynamic ratings
Rating Radial Dynamic	300 kN Not simultaneous with other listed dynamic ratings
Rating Axial Dynamic	460 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	98,9 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	68 kN Not simultaneous with other listed dynamic ratings
Rating Radial Load Max	290,4 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	24 holes - See source drawing
Inner ring mounting	24 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	10 mm
Number of teeth	63
SOURCE TRACEABILITY	
Source document code	INA-SLEWING-RINGS-CATALOGUE-404-2012
Source file	404_de_en_1.pdf


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.


SOURCE TRACEABILITY (CONTINUED)	
PDF page	68
Printed page	66
Source language	EN-DE
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	ina-g08-curve.webp SHA-256: 28e671cd49b81a18c7d3ea5b26ebde06b0ab2b0eb687d72a13ccd54f7b ac79c2
Outline Drawing	ina-g08-drawing.webp SHA-256: 1187a43490ecb15604eaa22eeb67c8cd9a74d9f6e0b69a9bd92f0376d2 4d8ecc

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

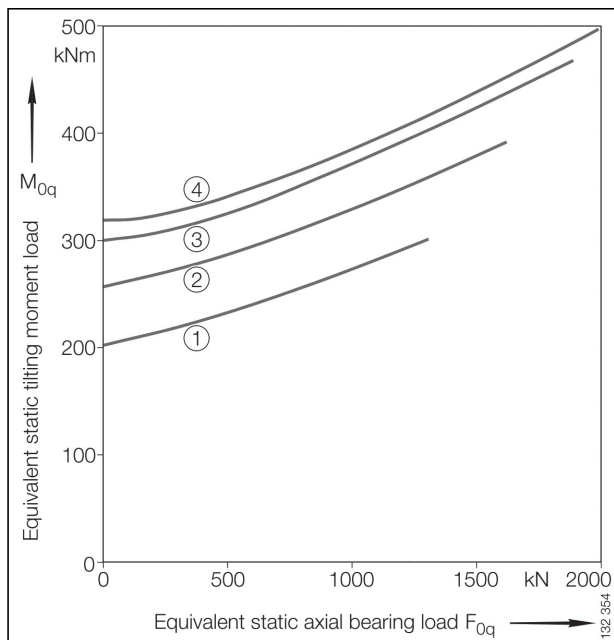

Static limiting load diagram

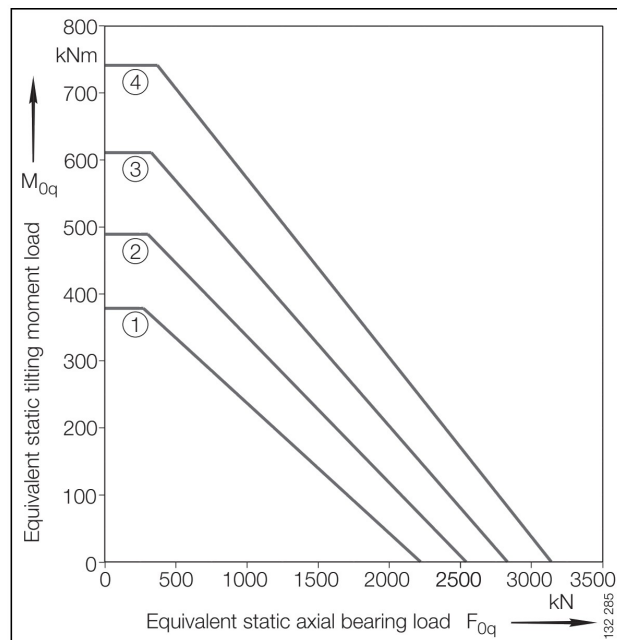

Static limiting load diagram

ina-g08-curve.webp | SHA-256: 28e671cd49b81a18c7d3ea5b26ebde06b0ab2b0eb687d72a13ccd54f7bac79c2

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**T5VERM7JT4FZSYW5ZCZSKW6E56****SOURCE DOCUMENT****INA-SLEWING-RINGS-CATALOGUE-404-2012****SOURCE FILE****404_de_en_1.pdf****SOURCE LOCATION****PDF page 68 | Printed page 66****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/ina/vsi-250755-n/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.