

Factory-Verified Replacement

MERYDOM XSA 140944 N

Certified for interchange with INA XSA 140944 N. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

XSA 140944 N

SERIES

XSA 14 Series

OVERALL OD

1,046.1 mm

OVERALL HEIGHT

mm

REFERENCE

INA XSA 140944 N

STRUCTURE

Rolos cruzados


OVERALL ID

874 mm

GEAR

Engrenagem externa

Published Technical Drawing

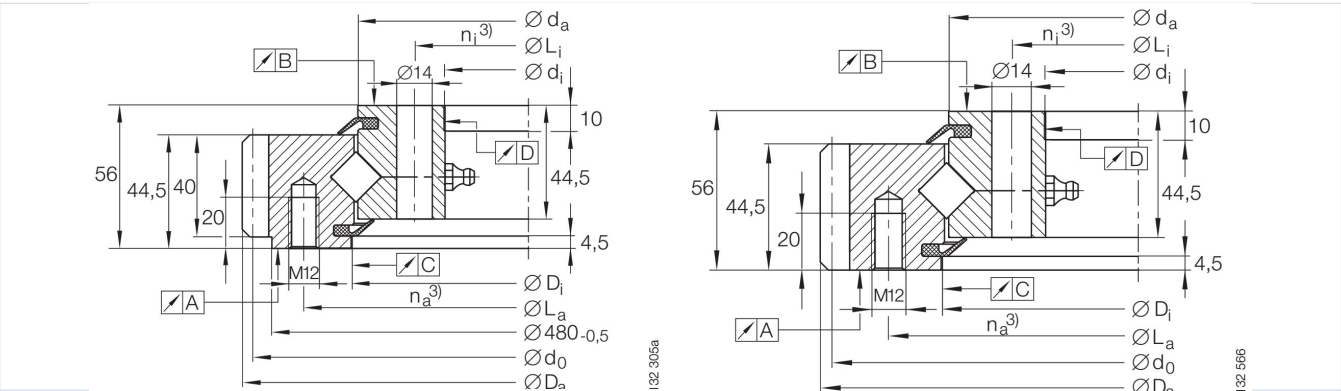

ina-g14-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	XSA 140944 N
Certified interchangeable with	INA XSA 140944 N
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	XL42JYSURPAF56ASAZI5FAXZI6
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	INA
Reference series	XSA 14 Series
Reference model	XSA 140944 N
Bearing structure	Rolos cruzados
Gear arrangement	Engrenagem externa
DIMENSION	
Mass (Mass)	77 kg
Overall outside diameter (Da)	1.046,1 mm
Overall inside diameter (di)	874 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Catalog diameter Di (Di)	947 mm
Catalog diameter da (da)	943-0,7 mm
MOUNTING	
Outer ring bolt circle (La)	985 mm
Outer ring mounting-hole count (na)	40
Inner ring bolt circle (Li)	898 mm
Inner ring mounting-hole count (ni)	44
GEAR	
Gear pitch diameter (d0)	1.032 mm
Gear module (m)	8 mm
Gear tooth count (z)	129
PERFORMANCE	
Maximum permissible radial load (Fr perm)	165,2 kN
Normal tooth force (Fznorm)	28,3 kN
Maximum tooth force (Fzmax)	42 kN
Basic dynamic axial load rating (Ca)	360 kN
Basic static axial load rating (C0a)	1.170 kN
Basic dynamic radial load rating (Cr)	227 kN
Basic static radial load rating (C0r)	580 kN
Preload (Preload)	0,01 incl. 0,05 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS	
Rating Radial Static	580 kN Not simultaneous with other listed dynamic ratings
Rating Axial Static	1.170 kN Not simultaneous with other listed dynamic ratings
Rating Radial Dynamic	227 kN Not simultaneous with other listed dynamic ratings
Rating Axial Dynamic	360 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	42 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	28,3 kN Not simultaneous with other listed dynamic ratings
Rating Radial Load Max	165,2 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	40 holes - See source drawing
Inner ring mounting	44 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	129
SOURCE TRACEABILITY	
Source document code	INA-SLEWING-RINGS-CATALOGUE-404-2012
Source file	404_de_en_1.pdf
PDF page	84
Printed page	82
Source language	EN-DE


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.


SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	ina-g14-curve.webp SHA-256: c6cb75fe394cf4956d3e8fd211f24eb12164284628a5e99b6d6fd5506042b488
Outline Drawing	ina-g14-drawing.webp SHA-256: 20a79e3f75f58dcc807df6827fcbe18d04878976f1509ed74f155a52de7d74b0

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

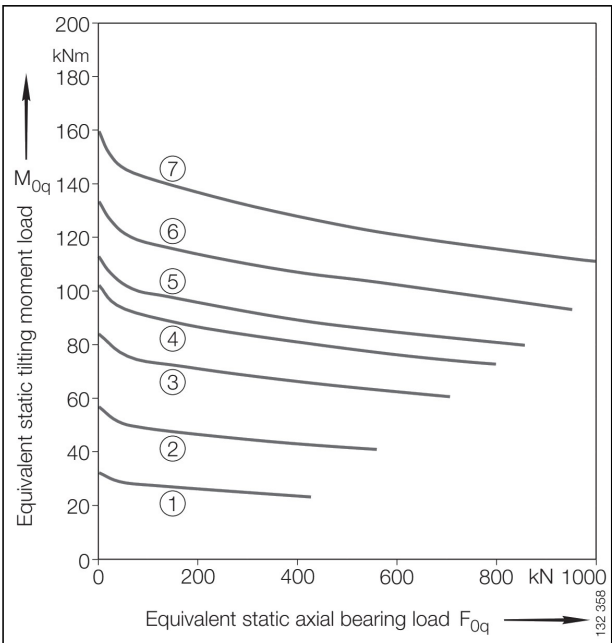

Static limiting load diagram

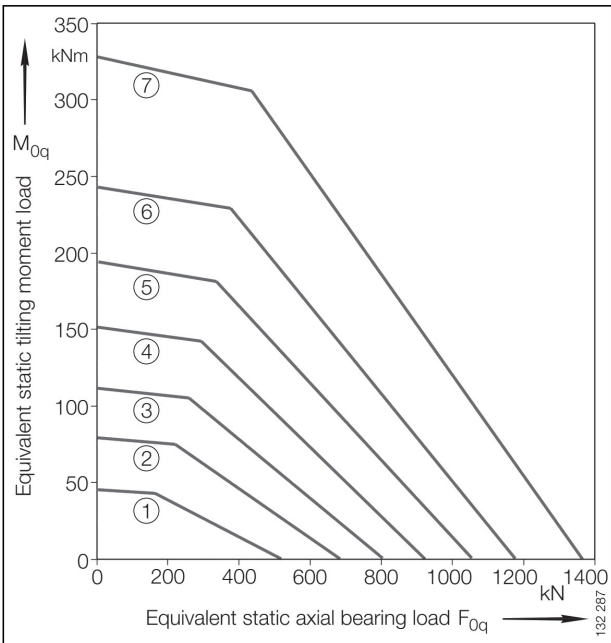

Static limiting load diagram

ina-g14-curve.webp | SHA-256: c6cb75fe394cf4956d3e8fd211f24eb12164284628a5e99b6d6fd5506042b488

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

XL42JYSURPAF56ASAZI5FAXZI6

SOURCE DOCUMENT

INA-SLEWING-RINGS-CATALOGUE-404-2012

SOURCE FILE

404_de_en_1.pdf

SOURCE LOCATION

PDF page 84 | Printed page 82

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/ina/xsa-140944-n/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.