

Factory-Verified Replacement

MERYDOM XU 080430

Certified for interchange with INA XU 080430. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

XU 080430

SERIES

XU Series

OVERALL OD

480 mm

OVERALL HEIGHT

26 mm

REFERENCE

INA XU 080430

STRUCTURE

Rolos cruzados


OVERALL ID

380 mm

GEAR

Sem engrenagem

Published Technical Drawing

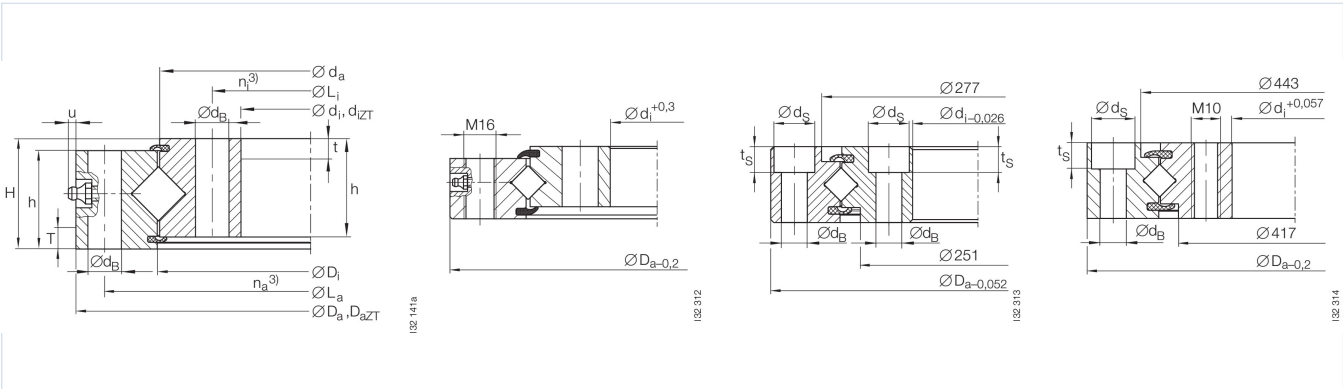

ina-g19-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	XU 080430
Certified interchangeable with	INA XU 080430
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	2GIGZ2M6QDT4TSD62A74ZIPF5Q
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	INA
Reference series	XU Series
Reference model	XU 080430
Bearing structure	Rolos cruzados
Gear arrangement	Sem engrenagem
DIMENSION	
Mass (Mass)	12 kg
Overall outside diameter (Da)	480 mm
Overall inside diameter (di)	380 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Catalog diameter Di (Di)	430,6 mm
Catalog diameter da (da)	429,4 mm
Overall height (H)	26 mm
Inner height (h)	26 mm
MOUNTING	
Outer ring bolt circle (La)	462 mm
Inner ring bolt circle (Li)	398 mm
Outer ring mounting-hole count (na)	20
Inner ring mounting-hole count (ni)	20
Common mounting-hole diameter (dB)	9 mm
Counterbore diameter (ds)	15 mm
Counterbore depth (ts)	9 mm
PERFORMANCE	
Basic dynamic radial load rating (Cr)	70 kN
Basic static radial load rating (C0r)	138 kN
Preload (Preload)	0 incl. 0,02 mm
Maximum permissible radial load (Fr perm)	35 kN
Basic dynamic axial load rating (Ca)	110 kN
Basic static axial load rating (C0a)	280 kN
Radial clearance (Radial clearance)	Clearance-free mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Axial tilting clearance (Axial tilting clearance)	Clearance-free mm
PERFORMANCE RATINGS	
Rating Radial Static	138 kN Not simultaneous with other listed dynamic ratings
Rating Axial Static	280 kN Not simultaneous with other listed dynamic ratings
Rating Radial Dynamic	70 kN Not simultaneous with other listed dynamic ratings
Rating Axial Dynamic	110 kN Not simultaneous with other listed dynamic ratings
Rating Radial Load Max	35 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	20 holes - dB 9 mm
Inner ring mounting	20 holes - dB 9 mm
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	INA-SLEWING-RINGS-CATALOGUE-404-2012
Source file	404_de_en_1.pdf
PDF page	94
Printed page	92
Source language	EN-DE
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.


PUBLISHED TECHNICAL MEDIA (CONTINUED)	
Load Curve Chart	ina-g19-curve.webp SHA-256: 16af9de4dd723e959d9c077d939955bbcd77c2098372a23959453f2e622f364c
Outline Drawing	ina-g19-drawing.webp SHA-256: 27ed24e82dfd43533b2e4369812155b9f23c434335fc9f3f186d70a990b31288

Published Load / Performance Chart


Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

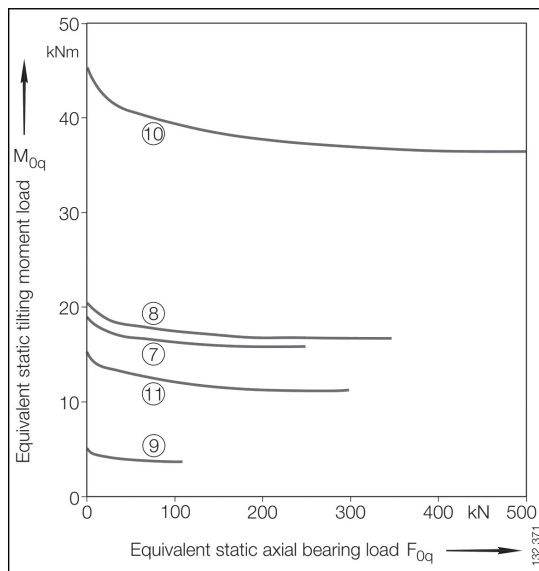


Static limiting load diagram

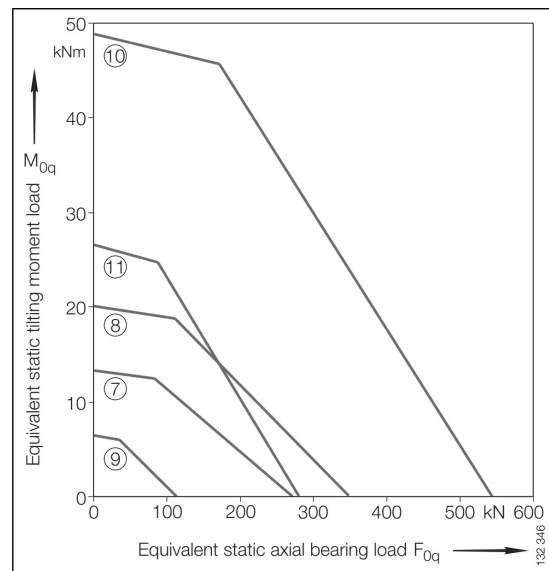

Static limiting load diagram

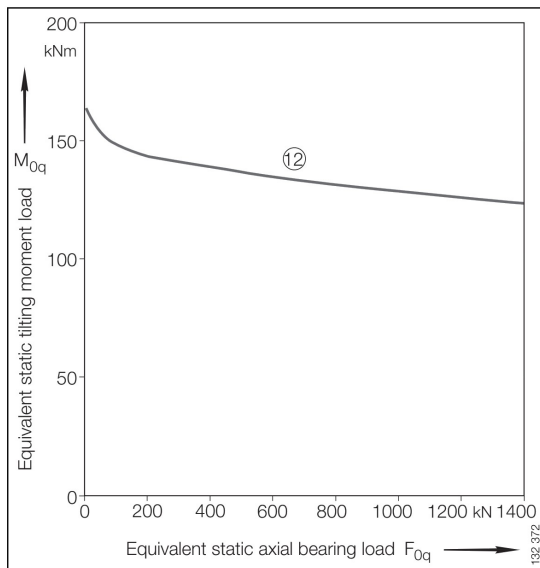

Static limiting load diagram

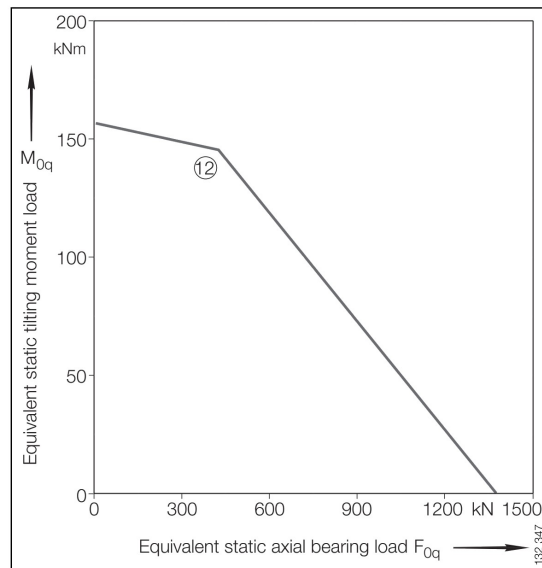

Static limiting load diagram

ina-g19-curve.webp | SHA-256: 16af9de4dd723e959d9c077d939955bbcd77c2098372a23959453f2e622f364c

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

2GIGZ2M6QDT4TSD62A74ZIPF5Q

SOURCE DOCUMENT

INA-SLEWING-RINGS-CATALOGUE-404-2012

SOURCE FILE

404_de_en_1.pdf

SOURCE LOCATION

PDF page 94 | Printed page 92

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/ina/xu-080430/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.