

Factory-Verified Replacement

MERYDOM XU 120179

Certified for interchange with INA XU 120179. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

XU 120179

REFERENCE

INA XU 120179

SERIES

XU Series

STRUCTURE

Rolos cruzados

OVERALL OD

234 mm

OVERALL ID

124.5 mm


OVERALL HEIGHT

35 mm

GEAR

Sem engrenagem

Published Technical Drawing

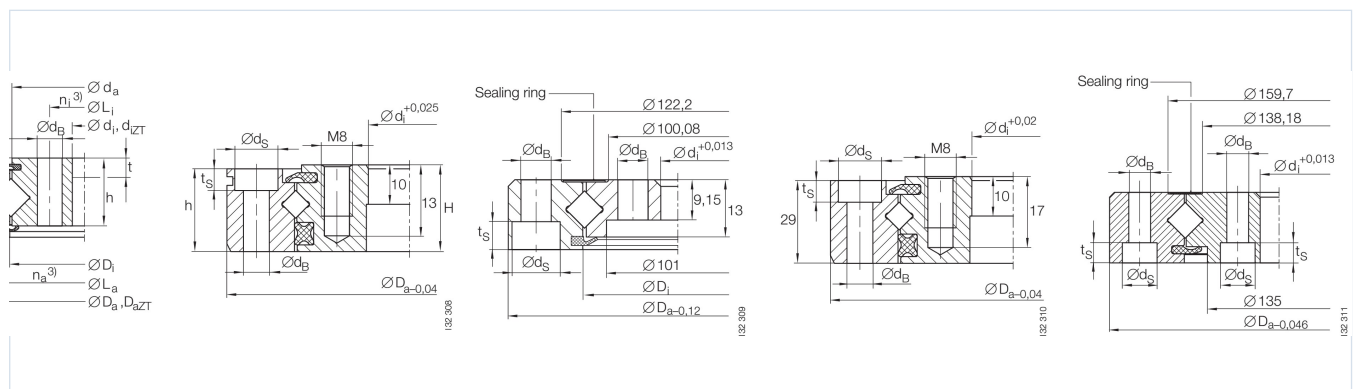

ina-g18-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	XU 120179
Certified interchangeable with	INA XU 120179
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	Q3KIFBAMZKMDBKNKI2ETYCJA7F
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	INA
Reference series	XU Series
Reference model	XU 120179
Bearing structure	Rolos cruzados
Gear arrangement	Sem engrenagem
DIMENSION	
Mass (Mass)	7 kg
Overall outside diameter (Da)	234 mm
Outside centring diameter (DaZT)	232 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (di)	124,5 mm
Inside centring diameter (diZT)	126,5 mm
Catalog diameter Di (Di)	180 0,2 mm
Catalog diameter da (da)	178 0,2 mm
Outer centring length (T)	5 mm
Inner centring length (t)	5 mm
Maximum dimension u (u)	6 mm
Overall height (H)	35 mm
Inner height (h)	30 mm
MOUNTING	
Outer ring bolt circle (La)	214 mm
Inner ring bolt circle (Li)	144,5 mm
Outer ring mounting-hole count (na)	12
Inner ring mounting-hole count (ni)	12
Common mounting-hole diameter (dB)	11 mm
PERFORMANCE	
Maximum permissible radial load (Fr perm)	33,6 kN
Basic dynamic axial load rating (Ca)	118 kN
Basic static axial load rating (C0a)	179 kN
Basic dynamic radial load rating (Cr)	75 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Basic static radial load rating (C _{0r})	88 kN
Preload (Preload)	0 incl. 0,02 mm
PERFORMANCE RATINGS	
Rating Radial Static	88 kN Not simultaneous with other listed dynamic ratings
Rating Axial Static	179 kN Not simultaneous with other listed dynamic ratings
Rating Radial Dynamic	75 kN Not simultaneous with other listed dynamic ratings
Rating Axial Dynamic	118 kN Not simultaneous with other listed dynamic ratings
Rating Radial Load Max	33,6 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	12 holes - dB 11 mm
Inner ring mounting	12 holes - dB 11 mm
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	INA-SLEWING-RINGS-CATALOGUE-404-2012
Source file	404_de_en_1.pdf
PDF page	92
Printed page	90
Source language	EN-DE
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.


PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	ina-g18-curve.webp SHA-256: eae289c075c9d297b4078ed86d4deb71798e0a73fb23bc2b7cb54a3ede555e50
Outline Drawing	ina-g18-drawing.webp SHA-256: 85ddc12e45a07ac284021e9b41b90b5f947471bad4fc440394cb1a0603ee939f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

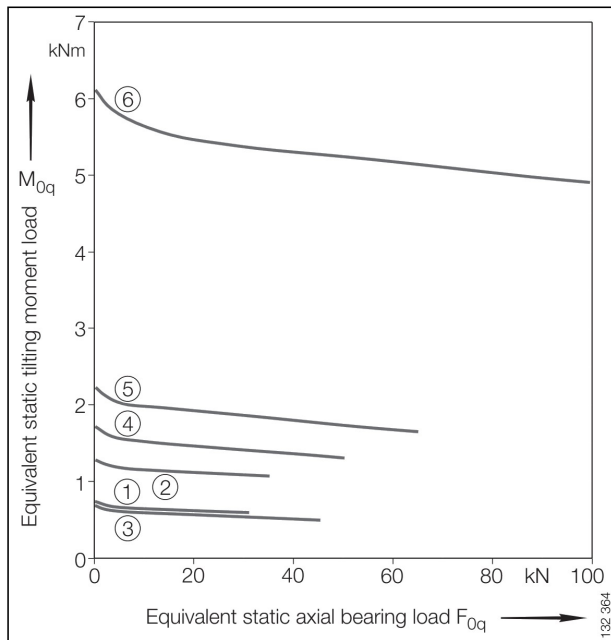

Static limiting load diagram

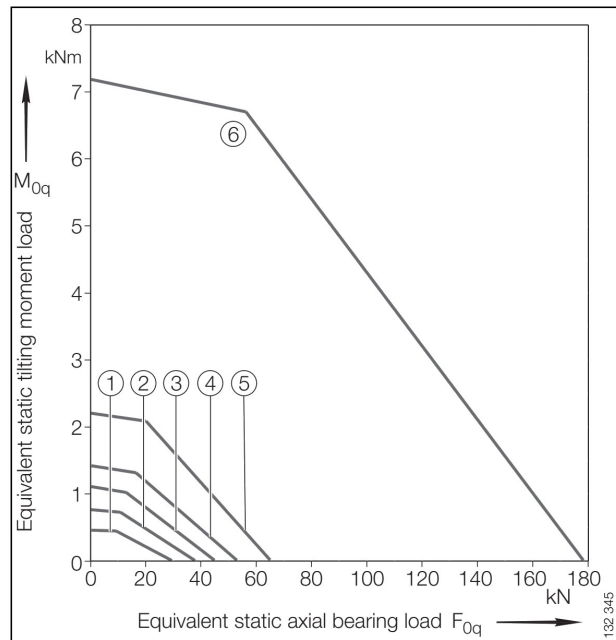

Static limiting load diagram

ina-g18-curve.webp | SHA-256: eae289c075c9d297b4078ed86d4deb71798e0a73fb23bc2b7cb54a3ede555e50

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**Q3KIFBAMZKMDBKNKI2ETYCJA7F****SOURCE DOCUMENT****INA-SLEWING-RINGS-CATALOGUE-404-2012****SOURCE FILE****404_de_en_1.pdf****SOURCE LOCATION****PDF page 92 | Printed page 90****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/ina/xu-120179/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.