

Factory-Verified Replacement

MERYDOM V40E034

Certified for interchange with La Leonessa V40E034. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

V40E034

SERIES

1RE Series

OVERALL OD

1,604 mm

OVERALL HEIGHT

130 mm

REFERENCE

La Leonessa V40E034

STRUCTURE

Esferas de contato de quatro pontos

OVERALL ID

1,206 mm

GEAR

Engrenagem externa

Published Technical Drawing



la-leonessa-1re-drawing.webp



Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	V40E034
Certified interchangeable with	La Leonessa V40E034
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	P2YL7FSJOW6DLE6OQOY6IMEJWK
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	1RE Series
Reference model	V40E034
Bearing structure	Esferas de contato de quatro pontos
Gear arrangement	Engrenagem externa
DIMENSION	
Mass (P)	628 kg
Overall outside diameter (De)	1.604 mm
Overall inside diameter (Di)	1.206 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	130 mm
Dim Dr (Dr)	1.389,5 mm
Dim Centering External (Ce)	1.551 -0,2/-0,4 mm
Dim Centering Internal (Ci)	1.208 +0,3/0 mm
MOUNTING	
Outer ring bolt circle (Ie)	1.500 mm
Outer ring mounting-hole count (ne)	36
Outer ring mounting-hole specification (Me)	M28
Inner ring bolt circle (Ii)	1.280 mm
Inner ring mounting-hole count (ni)	36+4
Inner ring mounting-hole specification (Mi)	M28
GEAR	
Gear module (m)	10 mm
Gear tooth count (z)	157
Addendum modification product x*m (xm)	7,5 mm
Liebherr catalogue gear dimension k*m (km)	0,5 mm
Gear pitch diameter (Dp)	1.585 mm
Gear Tooth Height (Hd)	85 mm
Gear Hardening Indicator (Tempa)	
PERFORMANCE	

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Basic static axial load rating (C0a)	7.370 kN
Static tilting moment rating (M0r)	2.530 kNm
Normal tooth force (Fnom)	80 kN
Maximum tooth force (Fmax)	160 kN
MISCELLANEOUS	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	7.370 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	2.530 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	80 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	160 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	36 holes - 36; M28
Inner ring mounting	36 holes - 36+4; M28
GEAR INTERFACE	
Pitch system	module
Module reference	10 mm
Number of teeth	157
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-EXTERNAL-GEAR-CATALOG-2017


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source file	SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.pdf
PDF page	12
Printed page	12
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-1re-static_load_curve.webp SHA-256: d7aae043a7185155fb61d59e50819f72c59987082f018cd5cc43cc5387066075
Outline Drawing	la-leonessa-1re-drawing.webp SHA-256: 9def12f376fbd9bc222f66ab0503412bd5a475fdfe624e4dbfe0ca549ea4d61f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

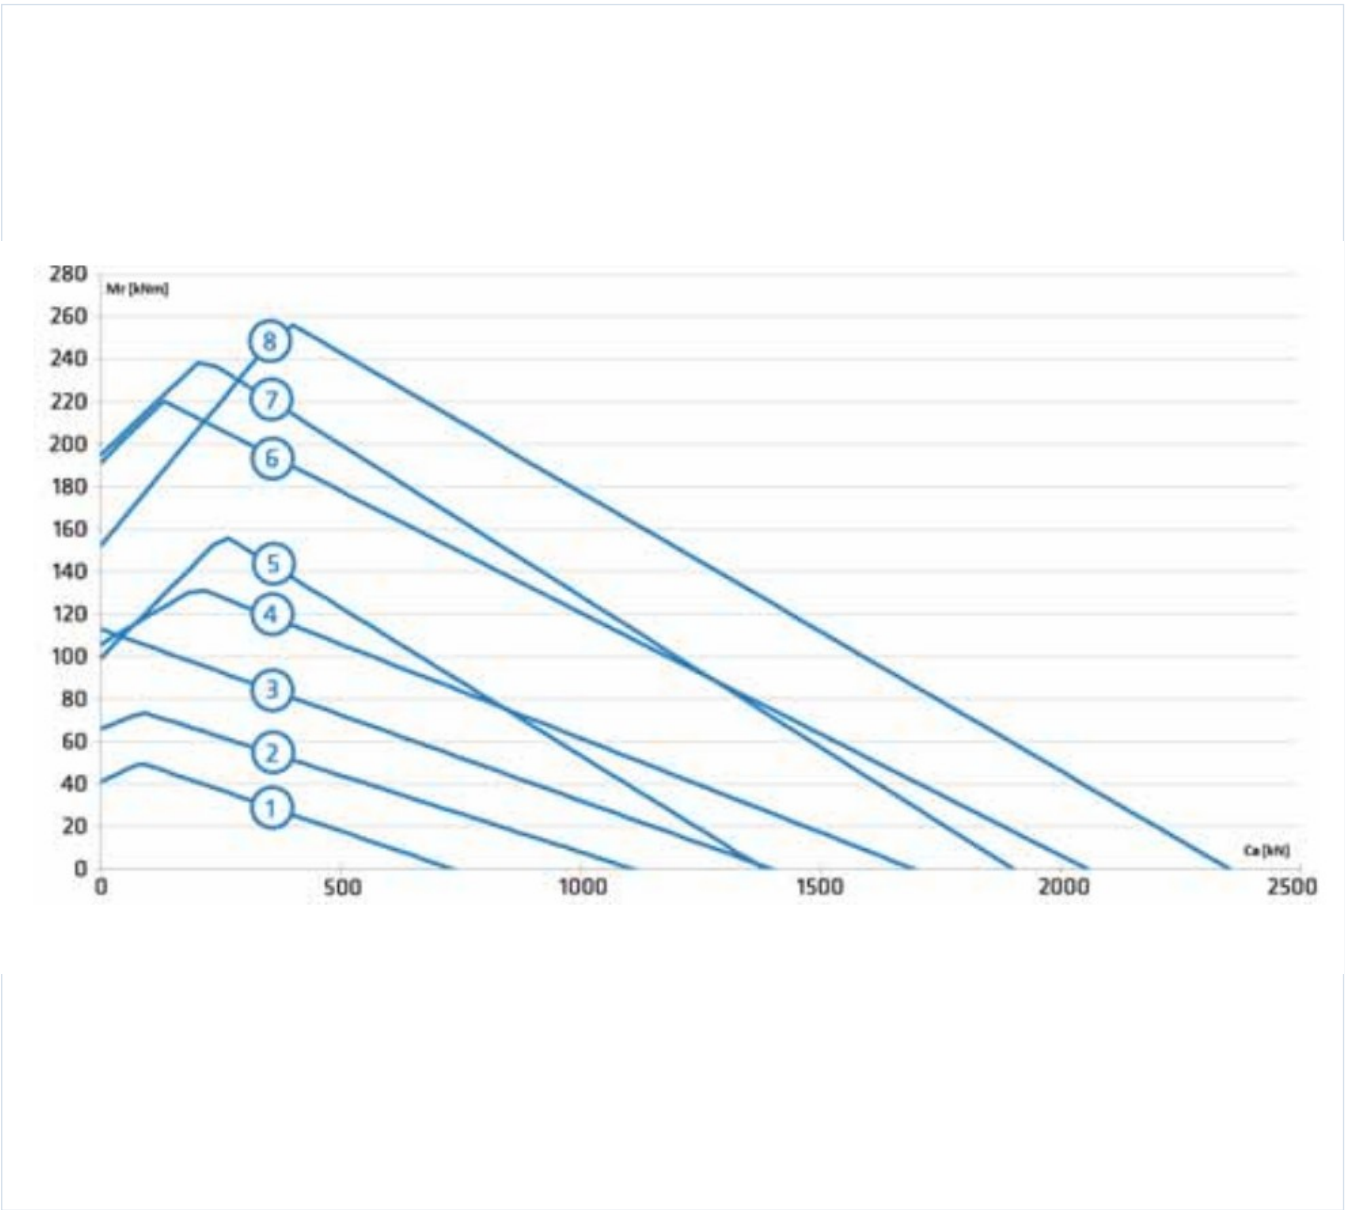

la-leonessa-1re-static_load_curve.webp | SHA-256:
d7aae043a7185155fb61d59e50819f72c59987082f018cd5cc43cc5387066075

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

P2YL7FSJOW6DLE6OQOY6IMEJWK

SOURCE FILE

SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.
pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

LA-LEONESSA-EXTERNAL-GEAR-CATALOG-20
17

SOURCE LOCATION

PDF page 12 | Printed page 12

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/la-leonessa/v40e034/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.