

Factory-Verified Replacement

MERYDOM VE202B00

Certified for interchange with La Leonessa VE202B00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VE202B00

SERIES

2SE Series

OVERALL OD

2,025 mm

OVERALL HEIGHT

146 mm

REFERENCE

La Leonessa VE202B00

STRUCTURE

Rolamento de esferas de duas
carreiras


OVERALL ID

1,608 mm


GEAR

Engrenagem externa

Published Technical Drawing

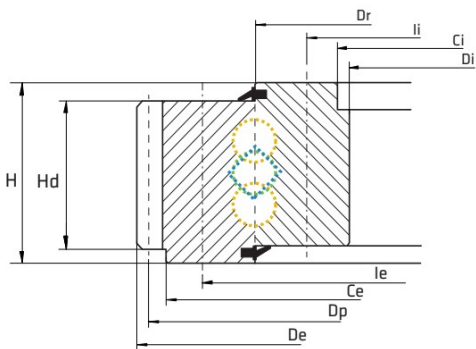

la-leonessa-2se-drawing.webp

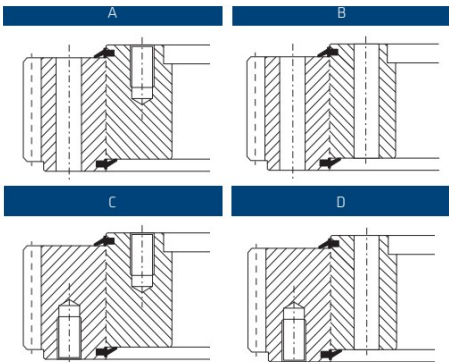

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VE202B00
Certified interchangeable with	La Leonessa VE202B00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	WQTBKQ6EYUJMNTYNWBFTX2WCHQ
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	2SE Series
Reference model	VE202B00
Bearing structure	Rolamento de esferas de duas carreiras
Gear arrangement	Engrenagem externa
DIMENSION	
Mass (P)	1.000 kg
Overall outside diameter (De)	2.025 mm
Overall inside diameter (Di)	1.608 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	146 mm
Dim Dr (Dr)	1.790,5 mm
MOUNTING	
Outer ring bolt circle (Ie)	1.905 mm
Outer ring mounting-hole count (ne)	60
Outer ring mounting-hole specification (Me)	M27
Inner ring bolt circle (Ii)	1.675 mm
Inner ring mounting-hole count (ni)	60
Inner ring mounting-hole specification (Mi)	M27
GEAR	
Gear module (m)	12 mm
Gear tooth count (z)	166
Addendum modification product x^*m (xm)	6 mm
Liebherr catalogue gear dimension k^*m (km)	1,5 mm
Gear pitch diameter (Dp)	2.004 mm
Gear Tooth Height (Hd)	120 mm
PERFORMANCE	
Basic static axial load rating (C0a)	14.160 kN
Static tilting moment rating (M0r)	5.988 kNm
Normal tooth force (Fnom)	168 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum tooth force (Fmax)	336 kN
MISCELLANEOUS	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	14.160 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	5.988 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	168 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	336 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	60 holes - 60; M27
Inner ring mounting	60 holes - 60; M27
GEAR INTERFACE	
Pitch system	module
Module reference	12 mm
Number of teeth	166
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-EXTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.pdf
PDF page	12
Printed page	12
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-2se-static_load_curve.webp SHA-256: 0056d7fd4ded2922ffa0000f4b2784841e0dbba7de039b531b9334852625cba1
Outline Drawing	la-leonessa-2se-drawing.webp SHA-256: 9def12f376fbd9bc222f66ab0503412bd5a475fdfe624e4dbfe0ca549ea4d61f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

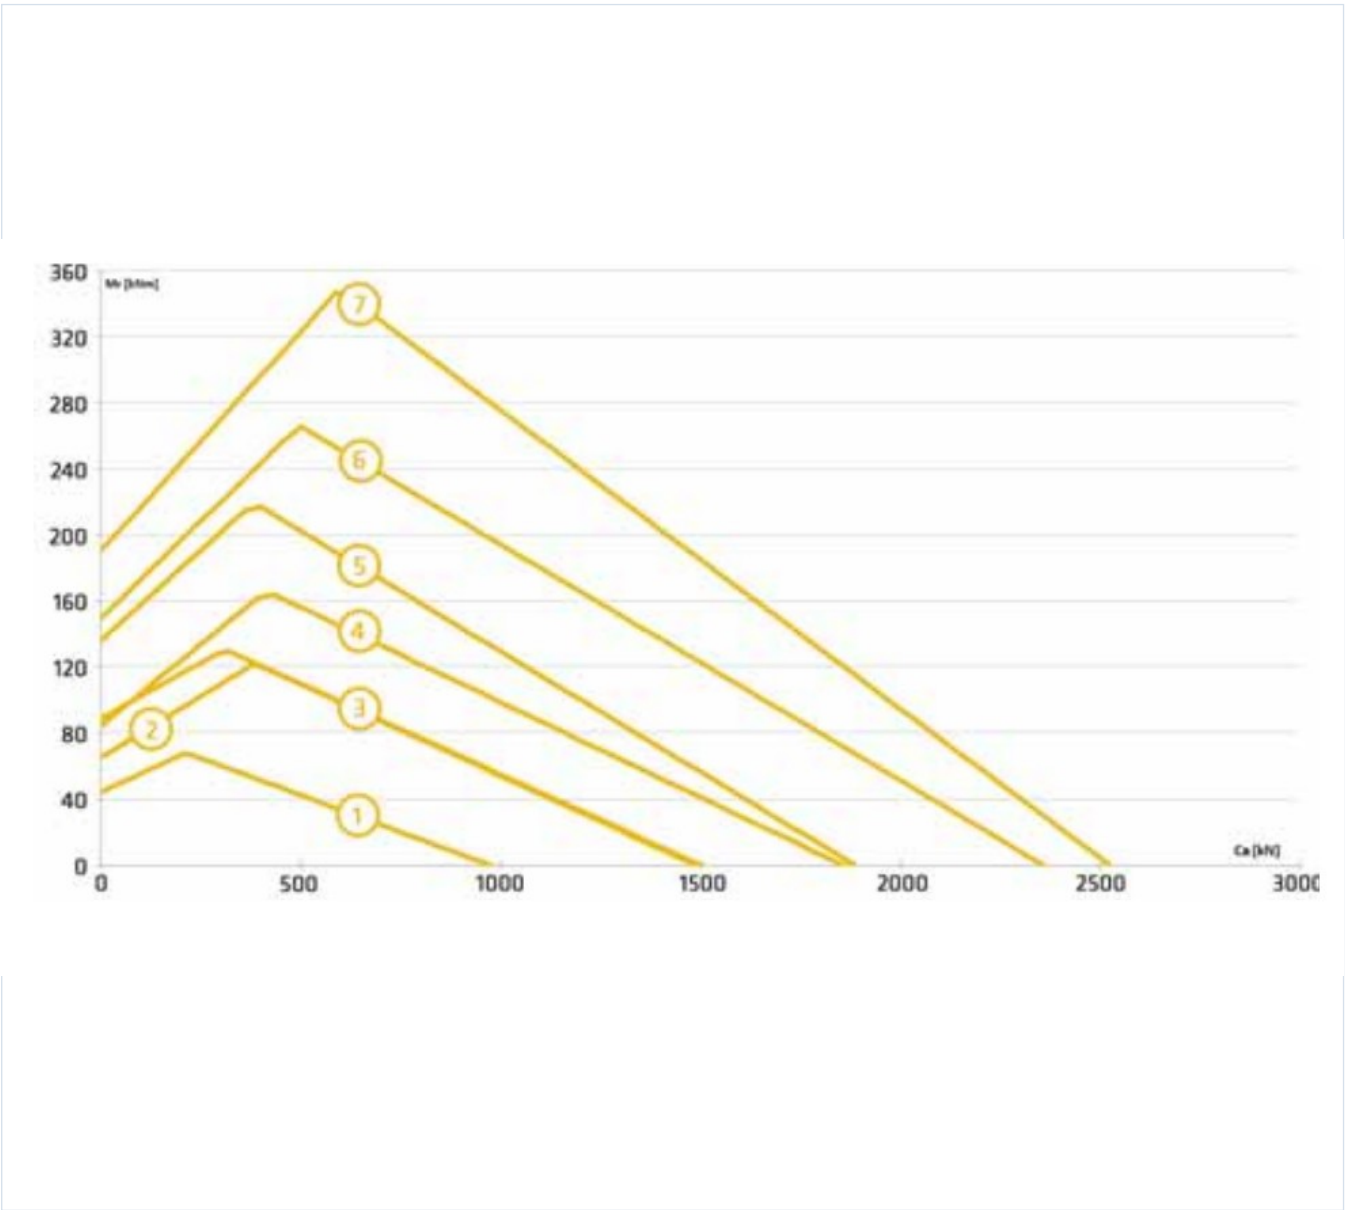

la-leonessa-2se-static_load_curve.webp | SHA-256:
0056d7fd4ded2922ffa0000f4b2784841e0dbba7de039b531b9334852625cba1

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

WQTBKQ6EYUJMNNTYNWBFTX2WCHQ

SOURCE FILE

SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.
pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

LA-LEONESSA-EXTERNAL-GEAR-CATALOG-20
17

SOURCE LOCATION

PDF page 12 | Printed page 12

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/la-leonessa/ve202b00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.