

Factory-Verified Replacement

MERYDOM VI085B00

Certified for interchange with La Leonessa VI085B00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VI085B00

SERIES

2SI Series

OVERALL OD

850 mm

OVERALL HEIGHT

92 mm

REFERENCE

La Leonessa VI085B00

STRUCTURE

Rolamento de esferas de duas
carreiras


OVERALL ID

641 mm


GEAR

Engrenagem interna

Published Technical Drawing

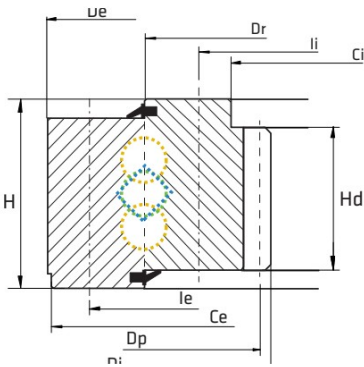

la-leonessa-2si-drawing.webp

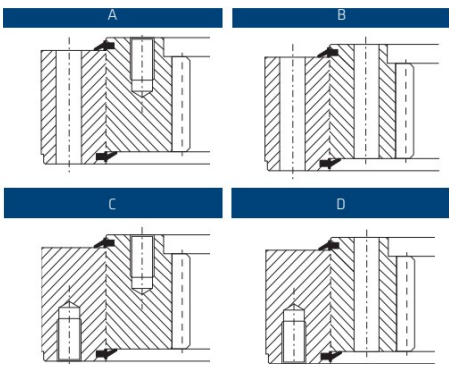

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VI085B00
Certified interchangeable with	La Leonessa VI085B00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	7NS24FFDTUVGGFFHNEMWRZKORU
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	2SI Series
Reference model	VI085B00
Bearing structure	Rolamento de esferas de duas carreiras
Gear arrangement	Engrenagem interna
DIMENSION	
Mass (P)	127 kg
Overall outside diameter (De)	850 mm
Overall inside diameter (Di)	641 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	92 mm
Dim Dr (Dr)	763 mm
Dim Centering External (Ce)	848 0 /-0,3 mm
MOUNTING	
Outer ring bolt circle (Ie)	820 mm
Outer ring mounting-hole count (ne)	36
Outer ring mounting-hole specification (Me)	M16
Inner ring bolt circle (Ii)	705 mm
Inner ring mounting-hole count (ni)	36
Inner ring mounting-hole specification (Mi)	M16
GEAR	
Gear module (m)	8 mm
Gear tooth count (z)	81
Addendum modification product x*m (xm)	4 mm
Liebherr catalogue gear dimension k*m (km)	0,5 mm
Gear pitch diameter (Dp)	656 mm
Gear Tooth Height (Hd)	83 mm
PERFORMANCE	
Basic static axial load rating (C0a)	2.120 kN
Static tilting moment rating (M0r)	369 kNm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Normal tooth force (Fnom)	55 kN
Maximum tooth force (Fmax)	110 kN
MISCELLANEOUS	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	2.120 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	369 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	55 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	110 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	36 holes - 36; M16
Inner ring mounting	36 holes - 36; M16
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	81
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf
PDF page	8
Printed page	8


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-2si-static_load_curve.webp SHA-256: 2d07d5007c414f54f7e8476084d020a30af3af05a960e7f690827754e00574cb
Outline Drawing	la-leonessa-2si-drawing.webp SHA-256: 3c0269351f1480df2b4130d7fb5c79552a0896a4f557467d7b138da54c54c490

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

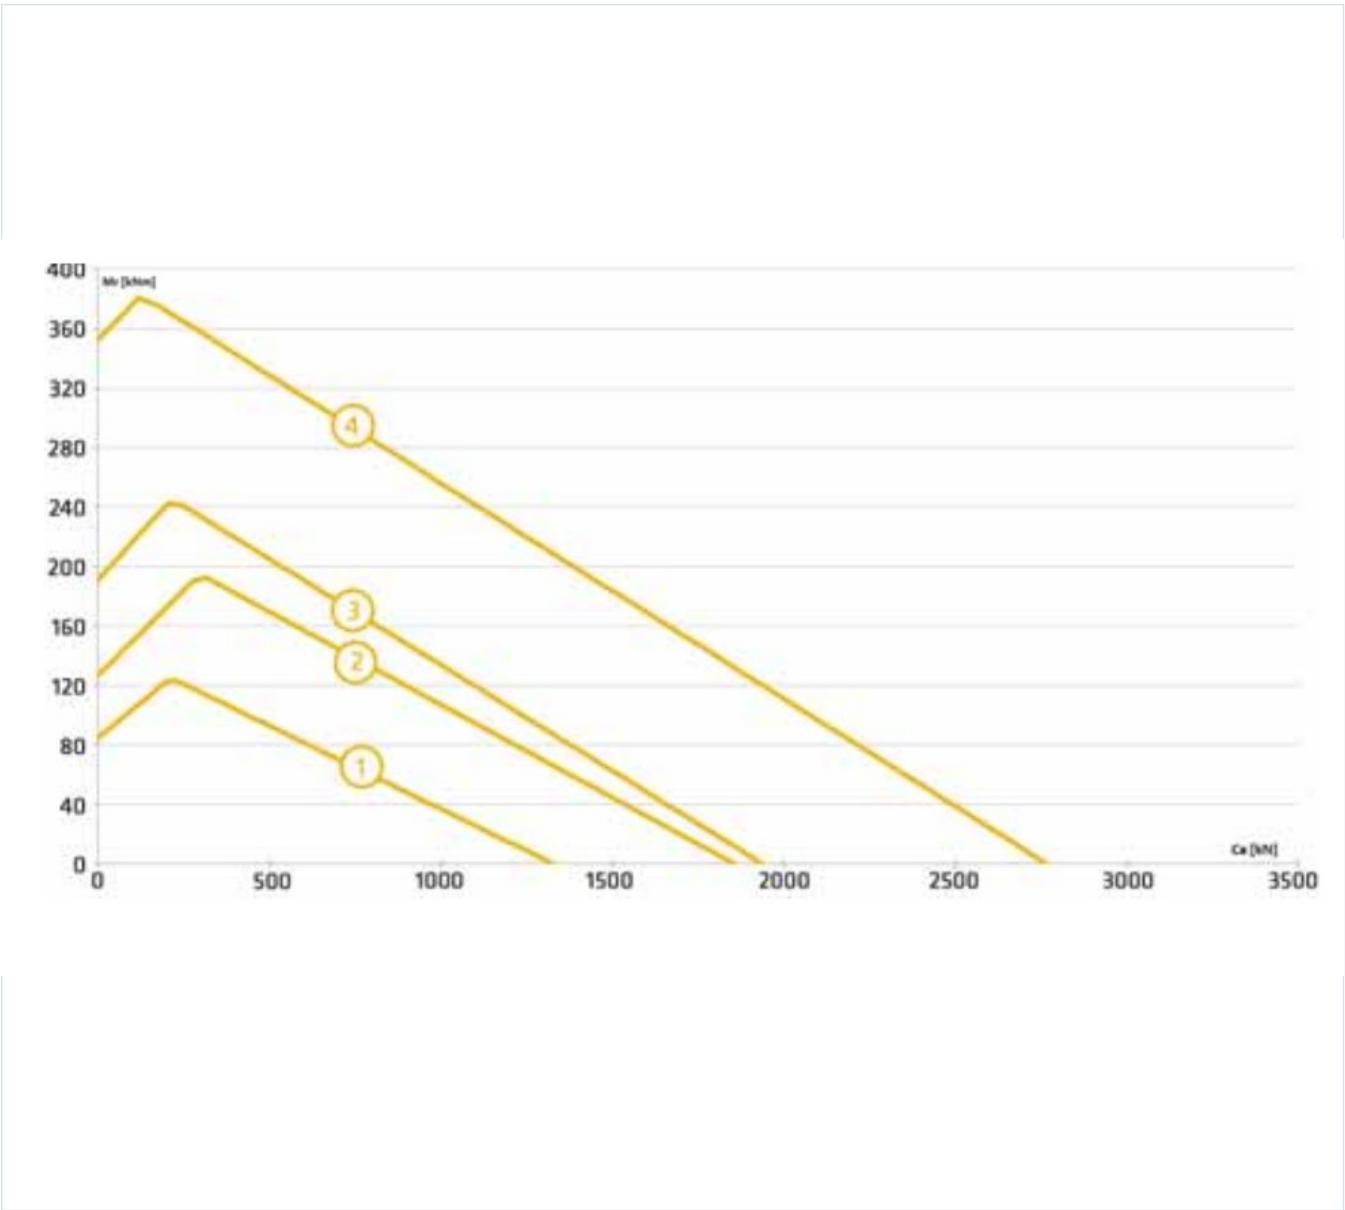

la-leonessa-2si-static_load_curve.webp | SHA-256:
2d07d5007c414f54f7e8476084d020a30af3af05a960e7f690827754e00574cb

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

7NS24FFDTUVGGFFHNEMWRZKORU

SOURCE FILE

SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017

SOURCE LOCATION

PDF page 8 | Printed page 8

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/la-leonessa/vi085b00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.