

Factory-Verified Replacement

MERYDOM VR207E00

Certified for interchange with La Leonessa VR207E00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VR207E00

REFERENCE

La Leonessa VR207E00

SERIES

VRE-25 Series

STRUCTURE

Rolos de tr s carreiras

OVERALL OD

2,076.8 mm

OVERALL ID

1,619 mm


OVERALL HEIGHT

147 mm

GEAR

Engrenagem externa

Published Technical Drawing

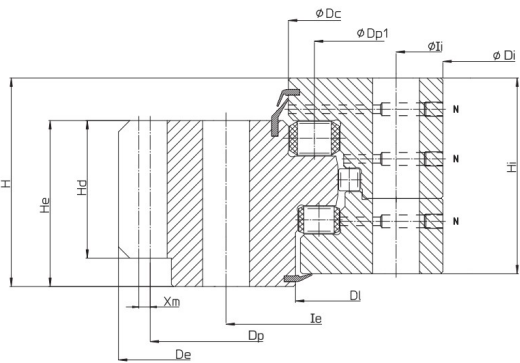

la-leonessa-vre-25-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VR207E00
Certified interchangeable with	La Leonessa VR207E00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	CWJDDC3MXJ7GA33GYXUB3FVAKQ
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	VRE-25 Series
Reference model	VR207E00
Bearing structure	Rolos de tr s carreiras
Gear arrangement	Engrenagem externa
DIMENSION	
Mass (P)	1.126 kg
Overall outside diameter (De)	2.076,8 mm
Overall inside diameter (Di)	1.619 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	147 mm
Dim Dc (DC)	1.836 mm
Dim DI (DI)	1.826 mm
Dim Hi (Hi)	117 mm
Dim He (He)	138 mm
MOUNTING	
Outer ring bolt circle (Ie)	1.925 mm
Outer ring mounting-hole count (ne)	36
Outer ring mounting-hole specification (Me)	M30
Inner ring bolt circle (Ii)	1.685 mm
Inner ring mounting-hole count (ni)	36
Inner ring mounting-hole specification (Mi)	M30
GEAR	
Gear pitch diameter (Dp)	2.032 mm
Gear module (m)	16 mm
Gear tooth count (Z)	127
Addendum modification product x^*m (xm)	8 mm
Liebherr catalogue gear dimension k^*m (km)	-1,6 mm
Gear Tooth Height (Hd)	116 mm
PERFORMANCE	

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Normal tooth force (F _{nom})	165 kN
Maximum tooth force (F _{max})	330 kN
MISCELLANEOUS	
Raceway Pitch Diameter (D _{p1})	1.800 mm
Lubrication Zerk Count (N)	6
PERFORMANCE RATINGS	
Rating Tooth Force Normal	165 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	330 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	36 holes - 36; M30
Inner ring mounting	36 holes - 36; M30
GEAR INTERFACE	
Pitch system	module
Module reference	16 mm
Number of teeth	127
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-THREE-ROW-ROLLER-CATALOG-2019
Source file	broc-3-giri-2019_p12.pdf
PDF page	4
Printed page	4
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-vre-25-static_load_curve.webp SHA-256: c7f42b13d5eb0de8b68105b3379fab52eb712caced883fe5d095b874ce f1c0ae
Outline Drawing	la-leonessa-vre-25-drawing.webp SHA-256: f79abcf7f83de539d79294d2f05ff0f8e1ab4b00034349f85860a5b286 de1a11

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

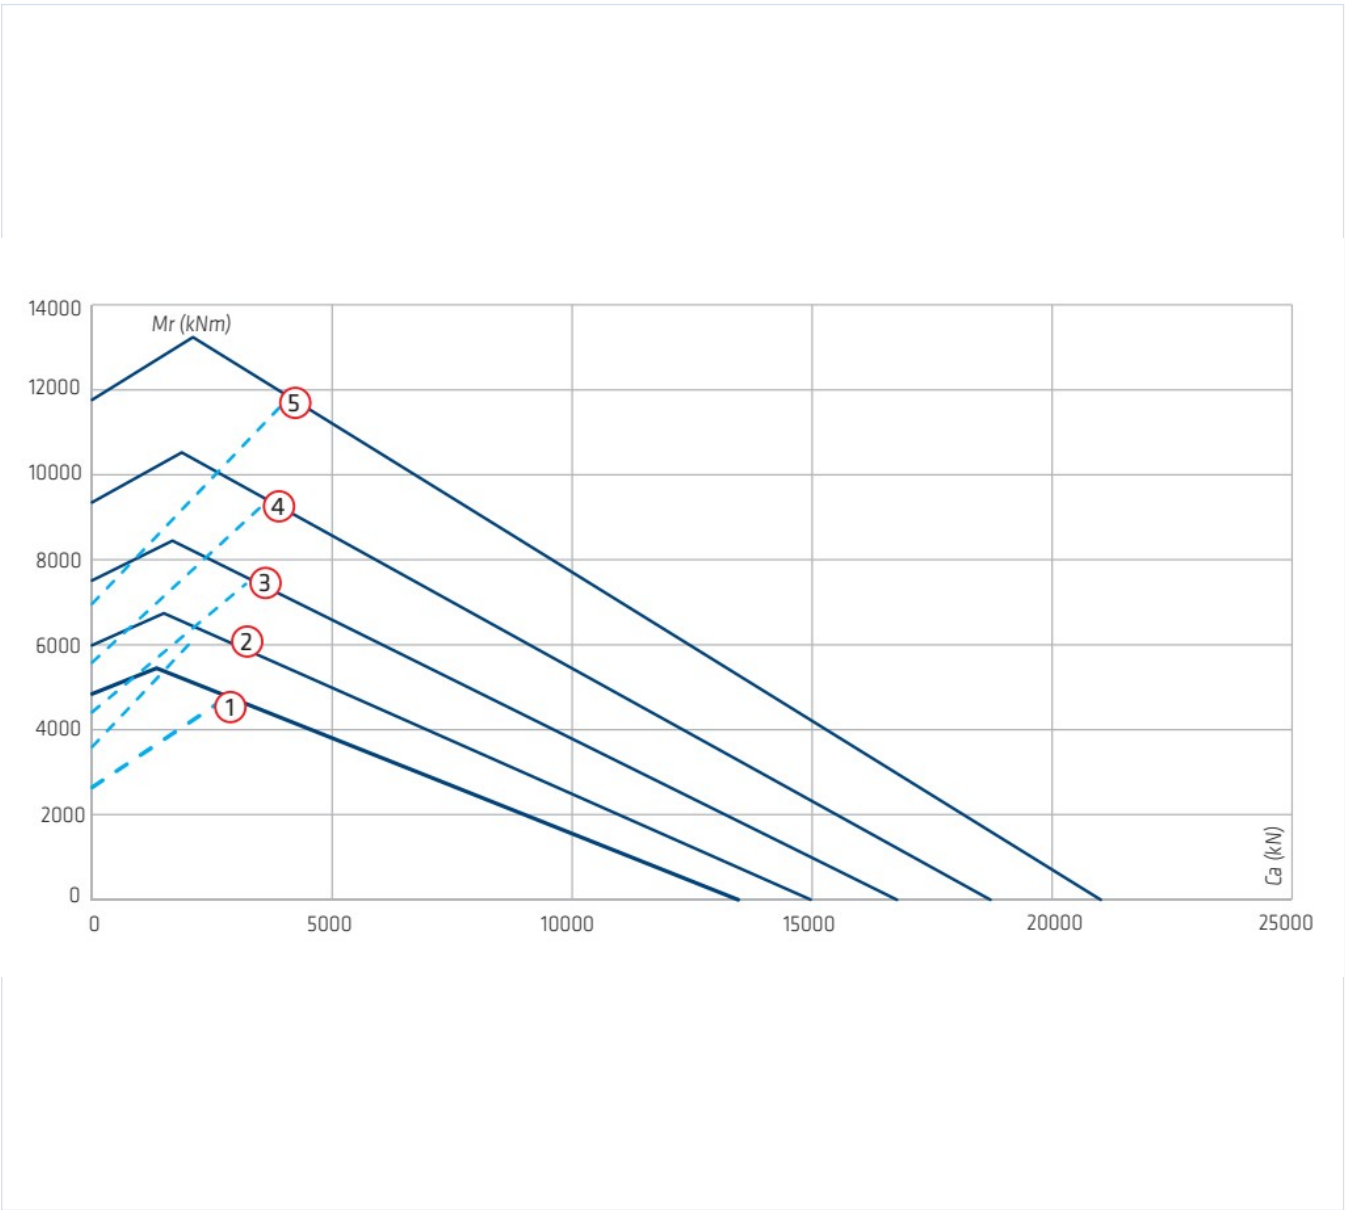

la-leonessa-vre-25-static_load_curve.webp | SHA-256:
c7f42b13d5eb0de8b68105b3379fab52eb712caced883fe5d095b874cef1c0ae

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

CWJDDC3MXJ7GA33GYXUB3FVAKQ

SOURCE FILE

broc-3-giri-2019_p12.pdf

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

**LA-LEONESSA-THREE-ROW-ROLLER-CATALOG
-2019**

SOURCE LOCATION

PDF page 4 | Printed page 4

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/la-leonessa/vr207e00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.