

Factory-Verified Replacement

MERYDOM KUD01797-030WO15-900-000

Certified for interchange with Liebherr KUD01797-030WO15-900-000. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

KUD01797-030WO15-900-000

REFERENCE

Liebherr KUD01797-030WO15-900-000

SERIES

KUD_30_WO Series

STRUCTURE

Esferas de contato de quatro pontos de duas carreiras

OVERALL OD

1,908 mm

OVERALL ID

1,683 mm


OVERALL HEIGHT

123 mm

GEAR

Sem engrenagem

Published Technical Drawing

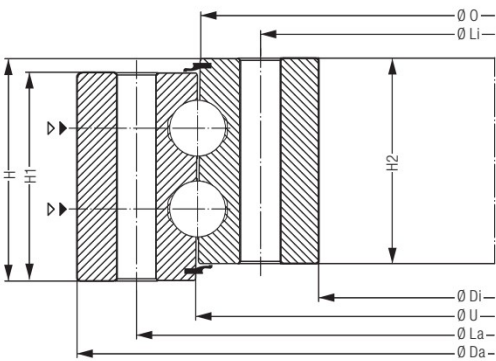

liebherr-page-122-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	KUD01797-030WO15-900-000
Certified interchangeable with	Liebherr KUD01797-030WO15-900-000
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	OFNAXAK6IQTDYCSZPP5D7Q3RRP
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Liebherr
Reference series	KUD_30_WO Series
Reference model	KUD01797-030WO15-900-000
Bearing structure	Esferas de contato de quatro pontos de duas carreiras
Gear arrangement	Sem engrenagem
DIMENSION	
Mass (Weight)	505 kg
Overall outside diameter (Da)	1.908 mm
Overall inside diameter (Di)	1.683 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	123 mm
Liebherr catalogue dimension O (O)	1.795 mm
Liebherr catalogue dimension U (U)	1.799 mm
Liebherr catalogue dimension H1 (H1)	111 mm
Liebherr catalogue dimension H2 (H2)	111 mm
MOUNTING	
Outer ring bolt circle (La)	1.864 mm
Inner ring bolt circle (Li)	1.727 mm
La/Li mounting-hole count (n)	52
Mounting fastener specification (M)	20
Liebherr catalogue count n1 (n1)	7
PERFORMANCE	
Static load rating (Cstat)	15.662 kN
Dynamic load rating (Cdyn)	1.123 kN
PERFORMANCE RATINGS	
Rating Dynamic	1.123 kN Not simultaneous with other listed dynamic ratings
Rating Static	15.662 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	52 holes - 20
Inner ring mounting	52 holes - 20


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	LIEBHERR-SLEWING-BEARINGS-PRODUCT-CATALOGUE-2018
Source file	liebherr-slewing-bearings-product-catalogue-pt-metric-web.pdf
PDF page	122
Printed page	122
Source language	EN
Original unit system	Mixed_metric_dp_threads
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	liebherr-page-122-curve.webp SHA-256: df042e5a400f58fe080a198dbb1acd635fc85604ba55e3b35d67edfa252ca97b
Outline Drawing	liebherr-page-122-drawing.webp SHA-256: c03e8056afa84595b6672a8400b4a646e3eb42370e3d6b347e098453710b8bf7

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

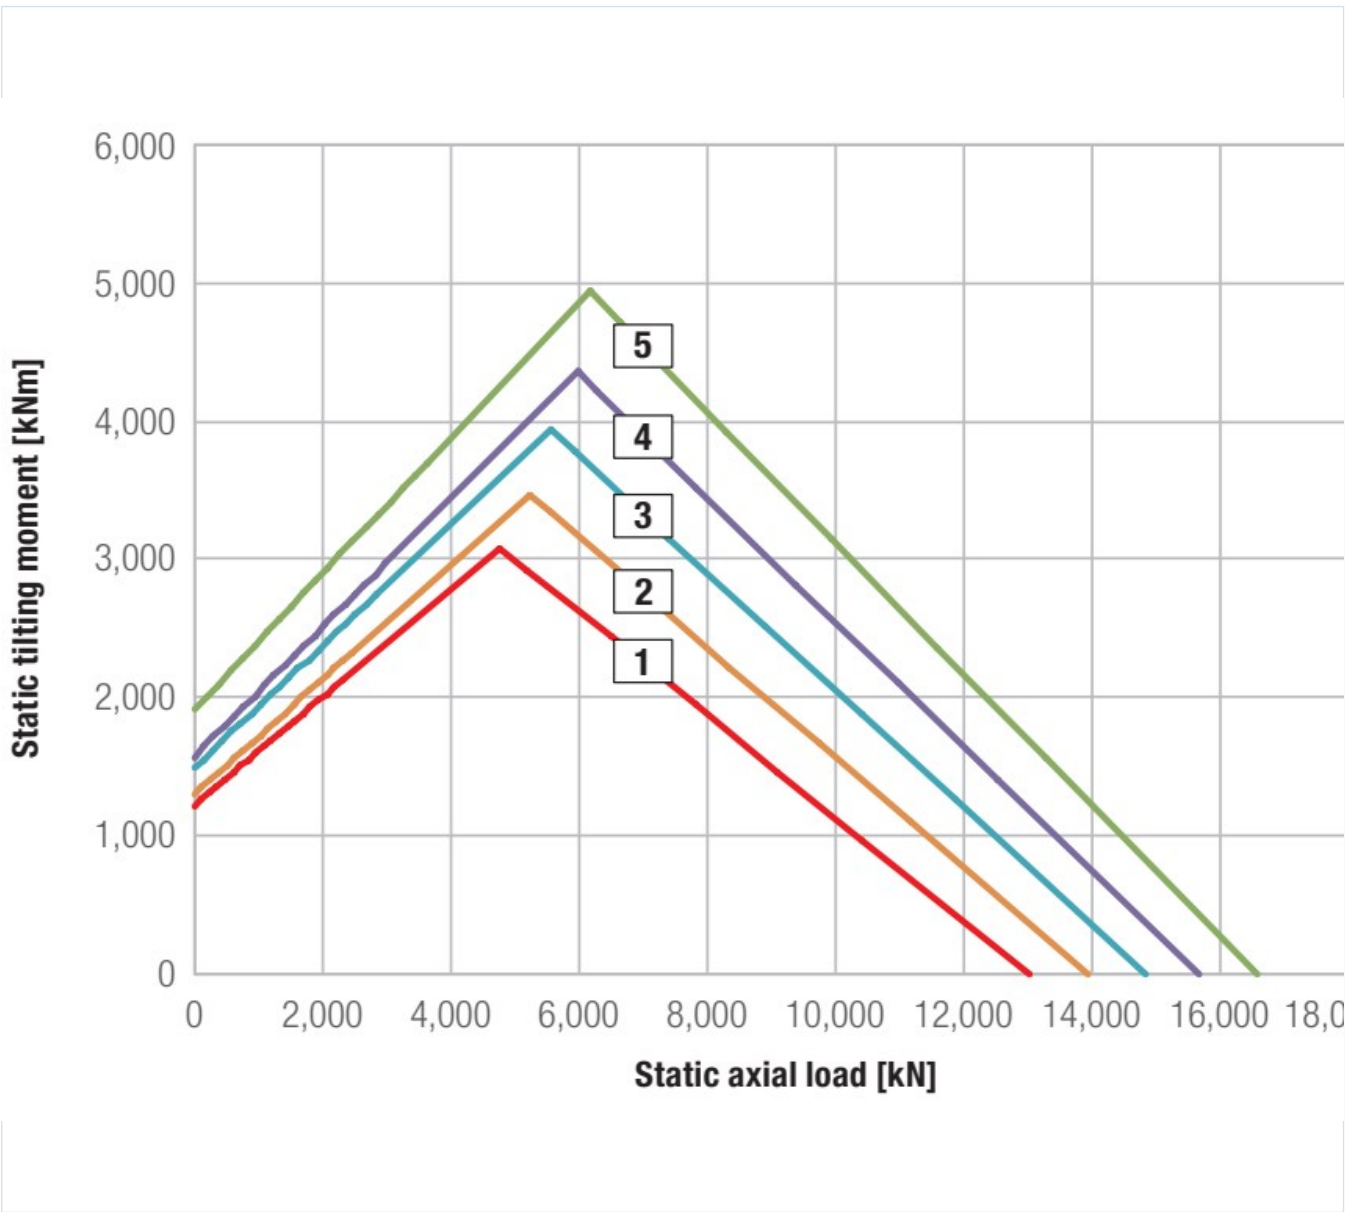

liebherr-page-122-curve.webp | SHA-256: df042e5a400f58fe080a198dbb1acd635fc85604ba55e3b35d67edfa252ca97b

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID OFNAXAK6IQTDYCSZPP5D7Q3RRP	SOURCE DOCUMENT LIEBHERR-SLEWING-BEARINGS-PRODUCT-CA TALOGUE-2018
SOURCE FILE liebherr-slewing-bearings-product-ca talogue-pt-metric-web.pdf	SOURCE LOCATION PDF page 122 Printed page 122
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page:
<https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/liebherr/kud01797-030wo15-900-000/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.