

Factory-Verified Replacement

MERYDOM RKD04750-036ZA15-900-000


Certified for interchange with Liebherr RKD04750-036ZA15-900-000. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL	REFERENCE
RKD04750-036ZA15-900-000	Liebherr RKD04750-036ZA15-900-000
SERIES	STRUCTURE
RKD_36_ZA Series	Combinação de rolos e esferas
OVERALL OD	OVERALL ID
5,000 mm	4,542 mm
OVERALL HEIGHT	GEAR
175 mm	Engrenagem externa

Published Technical Drawing

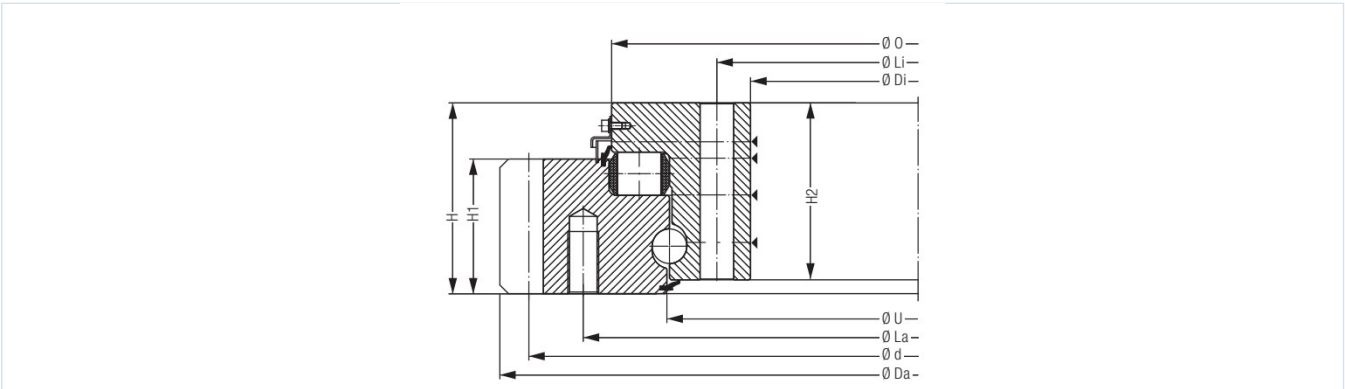

liebherr-page-149-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKD04750-036ZA15-900-000
Certified interchangeable with	Liebherr RKD04750-036ZA15-900-000
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	MT6QYGOOWXZEA3HH5GVN5KOLSR
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Liebherr
Reference series	RKD_36_ZA Series
Reference model	RKD04750-036ZA15-900-000
Bearing structure	Combinação de rolos e esferas
Gear arrangement	Engrenagem externa
DIMENSION	
Mass (Weight)	3.363 kg
Overall outside diameter (Da)	5.000 mm
Overall inside diameter (Di)	4.542 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	175 mm
Liebherr catalogue dimension O (O)	4.801 mm
Liebherr catalogue dimension U (U)	4.705 mm
Liebherr catalogue dimension H1 (H1)	125 mm
Liebherr catalogue dimension H2 (H2)	159 mm
MOUNTING	
Outer ring bolt circle (La)	4.851 mm
Inner ring bolt circle (Li)	4.608 mm
La/Li mounting-hole count (n)	90
Mounting fastener specification (M)	30
Liebherr catalogue count n1 (n1)	14
GEAR	
Gear pitch diameter (d)	4.950 mm
Gear module (m)	18 mm
Gear tooth count (z)	275
Addendum modification product x^*m (x^*m)	9 mm
Liebherr catalogue gear dimension k^*m (k^*m)	-1,8 mm
Gear face width (b)	125 mm
PERFORMANCE	
Standard tooth force (Fz standard)	195,6 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum tooth force (Fz maximum)	391,2 kN
Static load rating (Cstat)	63.610 kN
Dynamic load rating (Cdyn)	5.297 kN
PERFORMANCE RATINGS	
Rating Dynamic	5.297 kN Not simultaneous with other listed dynamic ratings
Rating Static	63.610 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	391,2 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Standard	195,6 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	90 holes - 30
Inner ring mounting	90 holes - 30
GEAR INTERFACE	
Pitch system	module
Module reference	18 mm
Number of teeth	275
SOURCE TRACEABILITY	
Source document code	LIEBHERR-SLEWING-BEARINGS-PRODUCT-CATALOGUE-2018
Source file	liebherr-slewing-bearings-product-catalogue-pt-metric-web.pdf
PDF page	149
Printed page	149


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source language	EN
Original unit system	Mixed_metric_dp_threads
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	liebherr-page-149-curve.webp SHA-256: 21834e3c088a66eab6ac08ec8ed6ab25b0e019220c4f16838f7d9e27eb7f8b28
Outline Drawing	liebherr-page-149-drawing.webp SHA-256: 513823a65f9a22dc3bfe4d3d82d3df300113aadb31ccefb6b25aada642508b87

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

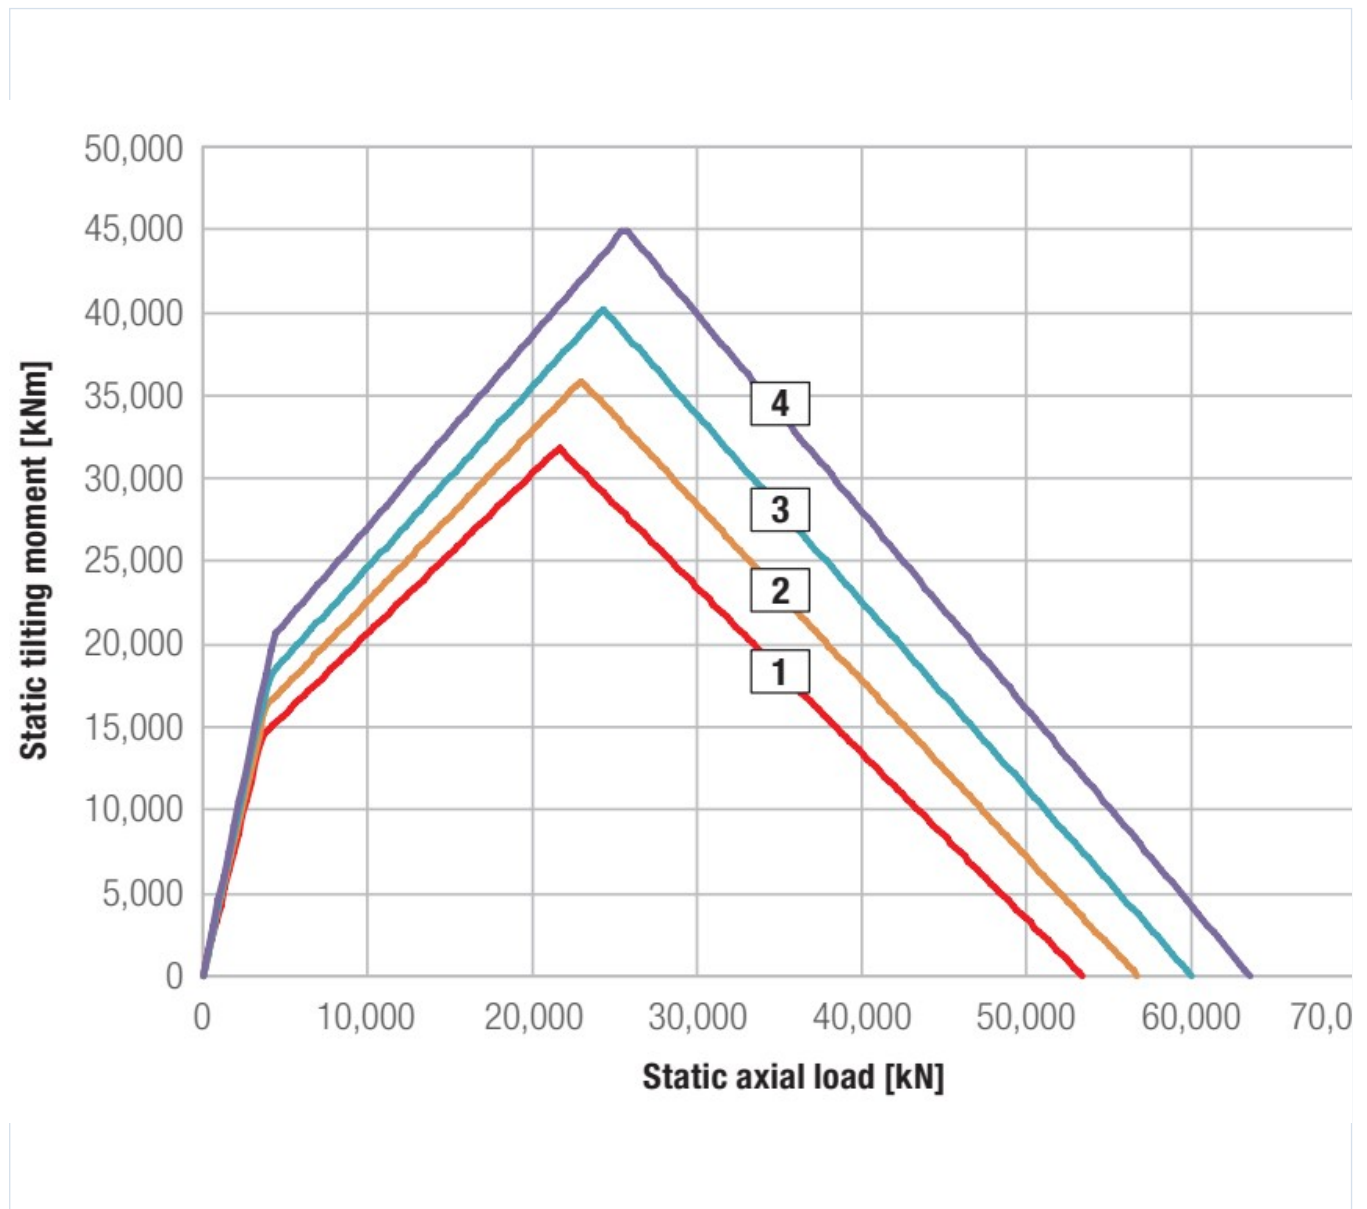

liebherr-page-149-curve.webp | SHA-256: 21834e3c088a66eab6ac08ec8ed6ab25b0e019220c4f16838f7d9e27eb7f8b28

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID MT6QYGOOWXZEA3HH5GVN5KOLSR	SOURCE DOCUMENT LIEBHERR-SLEWING-BEARINGS-PRODUCT-CA TALOGUE-2018
SOURCE FILE liebherr-slewing-bearings-product-ca talogue-pt-metric-web.pdf	SOURCE LOCATION PDF page 149 Printed page 149
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page:
<https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/liebherr/rkd04750-036za15-900-000/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.