

Factory-Verified Replacement

MERYDOM 01-1895-00

Certified for interchange with ROLLIX 01-1895-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

01-1895-00

REFERENCE

ROLLIX 01-1895-00

SERIES

01 Series

STRUCTURE

Esferas de contato de quatro pontos de uma carreira

OVERALL OD

2,140 mm

OVERALL ID

1,720 mm


OVERALL HEIGHT

130 mm

GEAR

Engrenagem externa

Published Technical Drawing

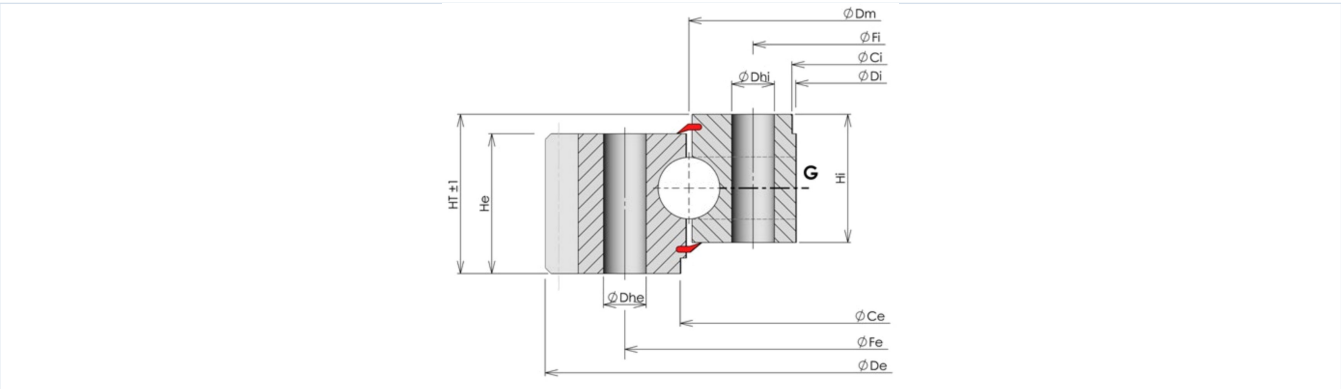

rollix-page-067-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	01-1895-00
Certified interchangeable with	ROLLIX 01-1895-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	CURTCXCMYYJZETS3P4RHZ4WKUL
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	01 Series
Reference model	01-1895-00
Bearing structure	Esferas de contato de quatro pontos de uma carreira
Gear arrangement	Engrenagem externa
DIMENSION	
Overall height (HT)	130 mm
Overall outside diameter (Dia De)	2.140 mm
Outer ring height (He)	120 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	1.720 mm
Inner ring height (Hi)	110 mm
Assembly weight (Weight)	942 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	1.905 mm
Inner ring pilot diameter (Dia Ci)	1.725 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	1.996 mm
Outer ring mounting-hole count (Ne)	48
Outer ring mounting-hole specification (Dhe)	33 mm
Inner ring hole type (Inner ring hole type)	Th
Inner ring bolt circle (Dia Fi)	1.794 mm
Inner ring mounting-hole count (Ni)	48
Inner ring mounting-hole specification (Dhi)	33 mm
GEAR	
Gear module (Module)	16 mm
Gear tooth count (Z)	131
Gear face width (W)	120 mm
PERFORMANCE	
Gear capacity, unhardened (Gear capacity unhardened)	288 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Gear capacity, hardened (Gear capacity hardened)	383 kN
MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	I
Greasing hole type (Greasing hole type)	R
PERFORMANCE RATINGS	
Rating Gear Capacity Hardened	383 kN Not simultaneous with other listed dynamic ratings
Rating Gear Capacity Unhardened	288 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	48 holes - External ring hole type Th; Dhe 33 mm
Inner ring mounting	48 holes - Inner ring hole type Th; Dhi 33 mm
GEAR INTERFACE	
Pitch system	module
Module reference	16 mm
Number of teeth	131
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	67
Printed page	67
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-067-curve.webp SHA-256: 33e4edec1002aa24aa40c62e0e4ecb629c0308c2405a332e1c67ba5cbe ea0f36
Outline Drawing	rollix-page-067-drawing.webp SHA-256: 3d6f0cbf07fbf535b531eb1dd278984759e3c4235b90ed51a2da613082 d71ac5

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

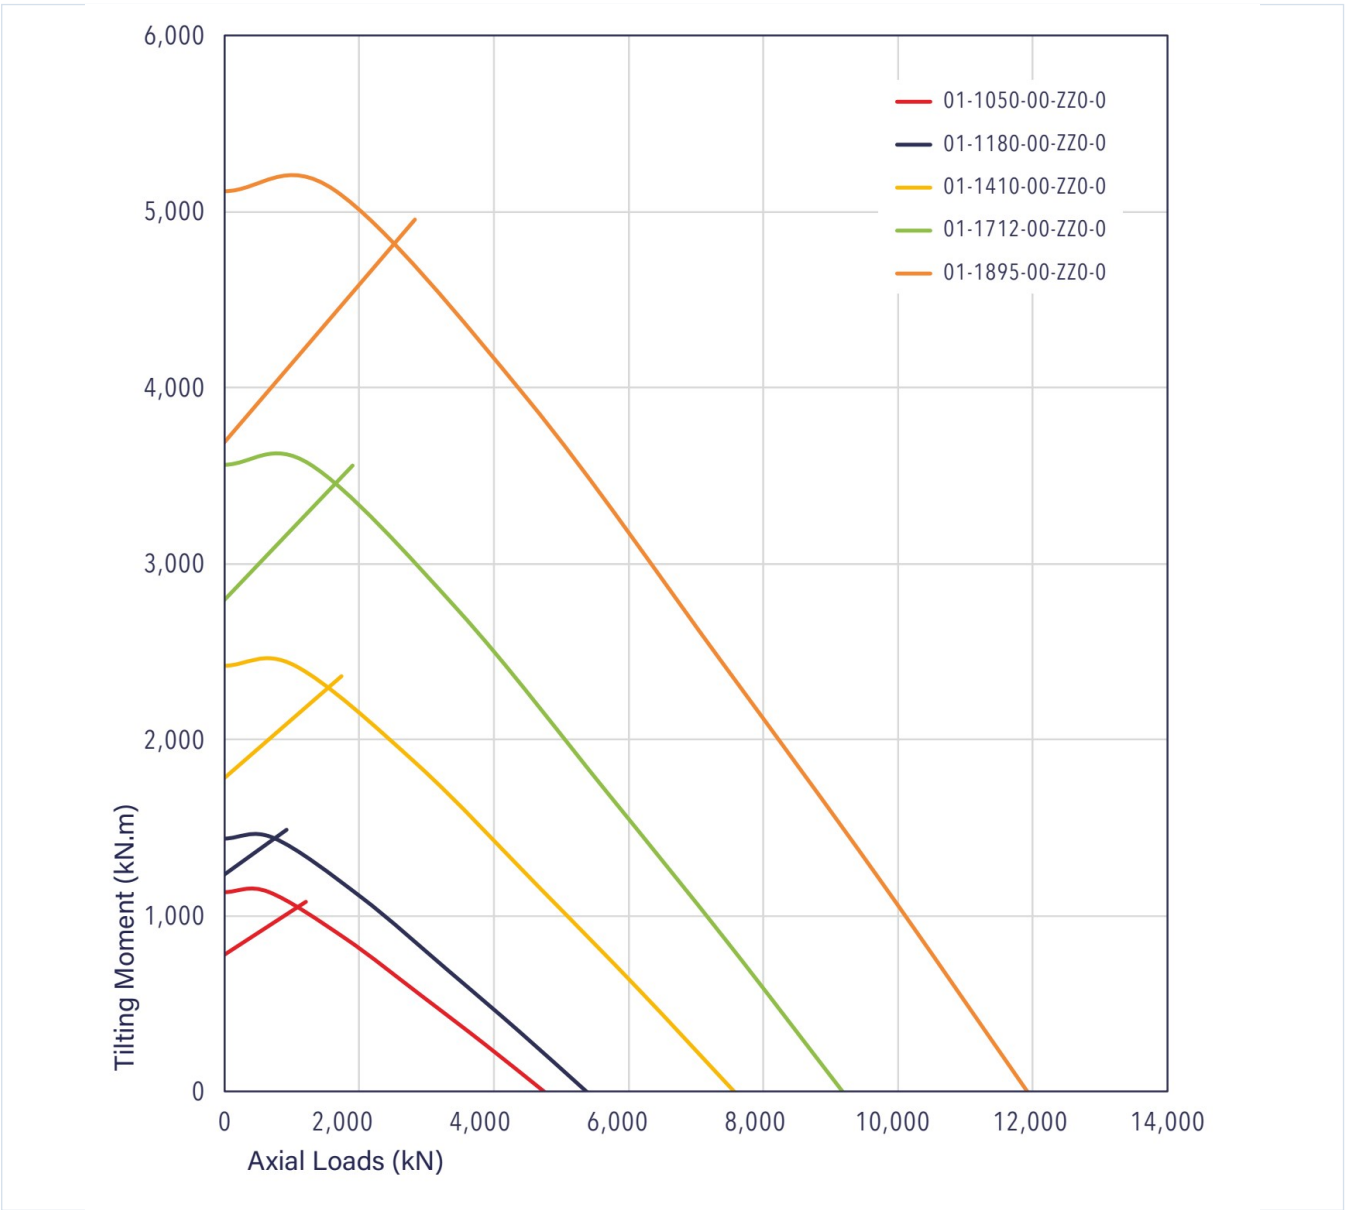

rollix-page-067-curve.webp | SHA-256: 33e4edec1002aa24aa40c62e0e4ecb629c0308c2405a332e1c67ba5cbeea0f36

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID CURTCXCMYYJZETS3P4RHZ4WKUL	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 67 Printed page 67
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/rollix/01-1895-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.