

Factory-Verified Replacement

MERYDOM 07-0380-01

Certified for interchange with ROLLIX 07-0380-01. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

07-0380-01

REFERENCE

ROLLIX 07-0380-01

SERIES

07 Series

STRUCTURE

Rolos cruzados de uma carreira

OVERALL OD

451 mm

OVERALL ID

291 mm


OVERALL HEIGHT

55 mm

GEAR

Engrenagem interna

Published Technical Drawing

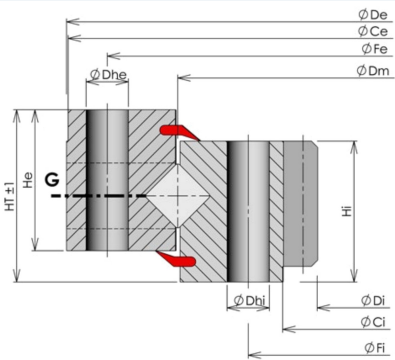

rollix-page-104-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	07-0380-01
Certified interchangeable with	ROLLIX 07-0380-01
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	DDG3BXMZQUOVGA6Y5J4S63MJ33
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	07 Series
Reference model	07-0380-01
Bearing structure	Rolos cruzados de uma carreira
Gear arrangement	Engrenagem interna
DIMENSION	
Overall height (HT)	55 mm
Overall outside diameter (Dia De)	451 mm
Outer ring height (He)	45 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	291 mm
Inner ring height (Hi)	45 mm
Assembly weight (Weight)	27 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	450 mm
Inner ring pilot diameter (Dia Ci)	313 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	425 mm
Outer ring mounting-hole count (Ne)	24
Outer ring mounting-hole specification (Dhe)	13 mm
Inner ring hole type (Inner ring hole type)	Th
Inner ring bolt circle (Dia Fi)	335 mm
Inner ring mounting-hole count (Ni)	24
Inner ring mounting-hole specification (Dhi)	13 mm
GEAR	
Gear module (Module)	5 mm
Gear tooth count (Z)	60
Gear face width (W)	40 mm
PERFORMANCE	
Gear capacity, unhardened (Gear capacity unhardened)	28 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Gear capacity, hardened (Gear capacity hardened)	37 kN
MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	E
Greasing hole type (Greasing hole type)	R
PERFORMANCE RATINGS	
Rating Gear Capacity Hardened	37 kN Not simultaneous with other listed dynamic ratings
Rating Gear Capacity Unhardened	28 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	24 holes - External ring hole type Th; Dhe 13 mm
Inner ring mounting	24 holes - Inner ring hole type Th; Dhi 13 mm
GEAR INTERFACE	
Pitch system	module
Module reference	5 mm
Number of teeth	60
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	104
Printed page	104
Source language	EN
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-104-curve.webp SHA-256: 9dc8cee2586af1e3345e17f61c974de9e81736c62310b51090c94b65b6402897
Outline Drawing	rollix-page-104-drawing.webp SHA-256: d3baf815da93d46d806c9217a155609c3254cf53b7d9dbe1f88d8e78323f7e12

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

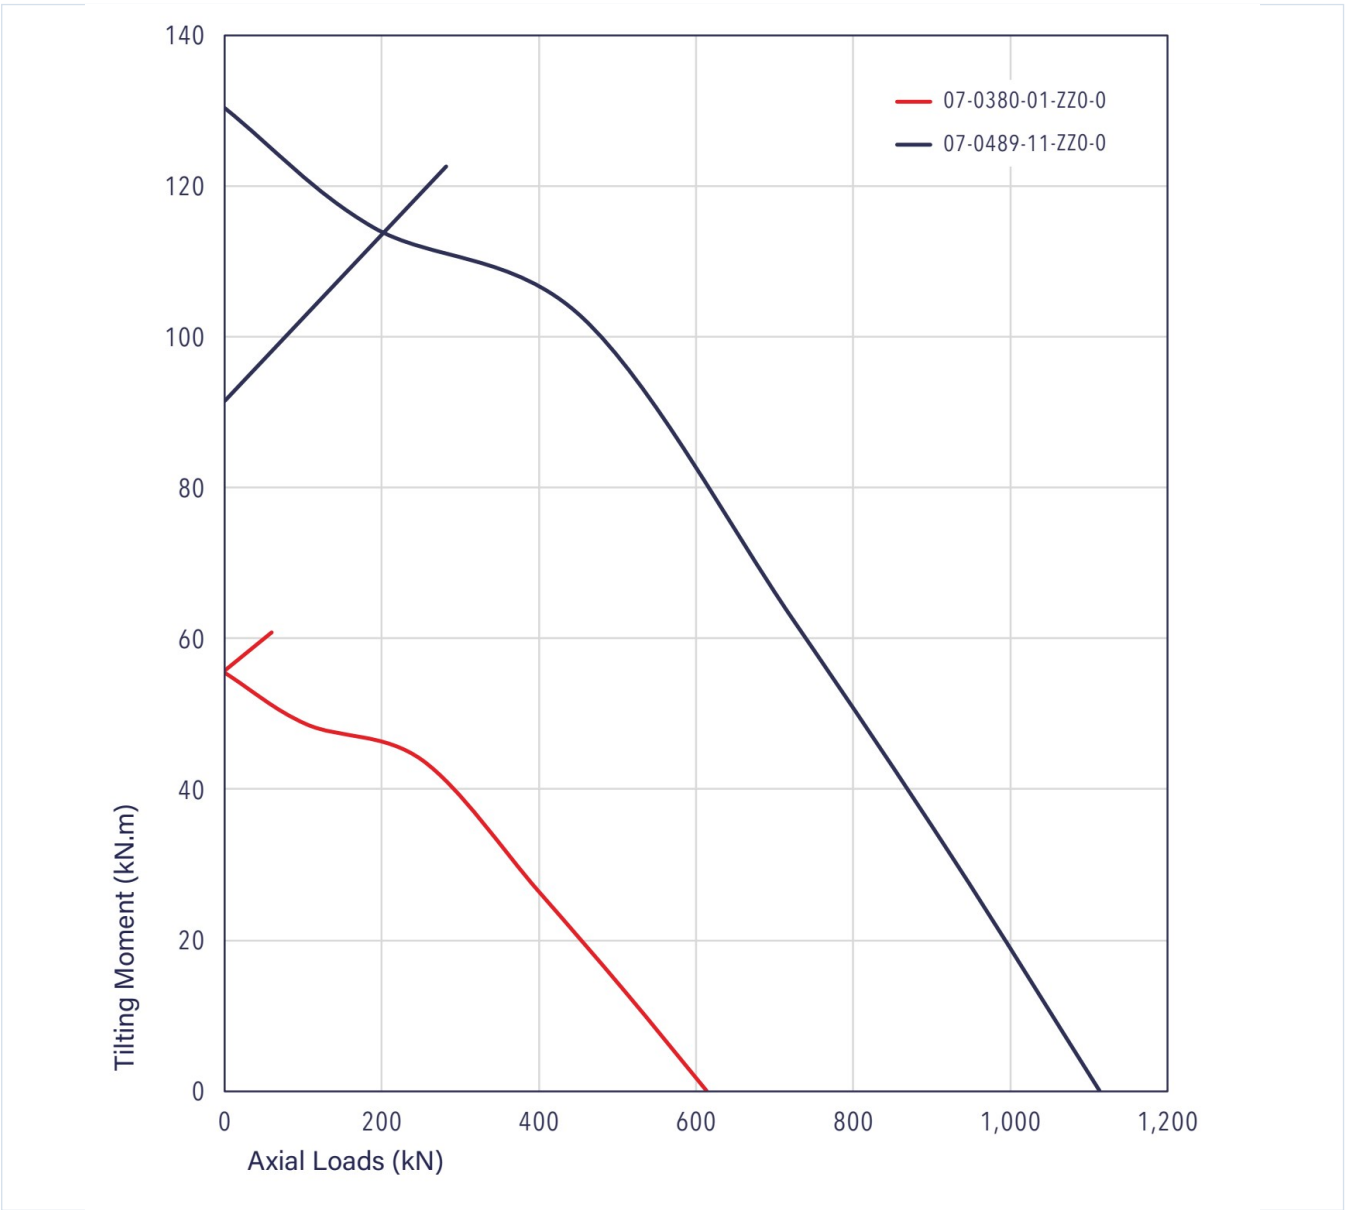

rollix-page-104-curve.webp | SHA-256: 9dc8cee2586af1e3345e17f61c974de9e81736c62310b51090c94b65b6402897

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID DDG3BXMZQUOVGA6Y5J4S63MJ33	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 104 Printed page 104
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/rollix/07-0380-01/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.