

Factory-Verified Replacement

MERYDOM 08-4000-00

Certified for interchange with ROLLIX 08-4000-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

08-4000-00

REFERENCE

ROLLIX 08-4000-00

SERIES

08 Series

STRUCTURE

Rolos cruzados de uma carreira

OVERALL OD

4,230 mm

OVERALL ID

3,766 mm


OVERALL HEIGHT

195 mm

GEAR

Sem engrenagem

Published Technical Drawing

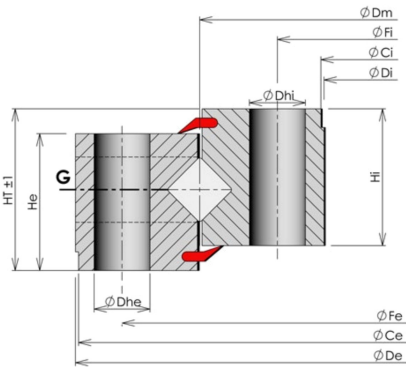

rollix-page-111-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	08-4000-00
Certified interchangeable with	ROLLIX 08-4000-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	3HHMPMT7CZOCERFFBCNAHNTSV2
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	08 Series
Reference model	08-4000-00
Bearing structure	Rolos cruzados de uma carreira
Gear arrangement	Sem engrenagem
DIMENSION	
Overall height (HT)	195 mm
Overall outside diameter (Dia De)	4.230 mm
Outer ring height (He)	180 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	3.766 mm
Inner ring height (Hi)	165 mm
Assembly weight (Weight)	3.430 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	4.010 mm
Inner ring pilot diameter (Dia Ci)	3.770 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	4.140 mm
Outer ring mounting-hole count (Ne)	120
Outer ring mounting-hole specification (Dhe)	39 mm
Inner ring hole type (Inner ring hole type)	Th
Inner ring bolt circle (Dia Fi)	3.860 mm
Inner ring mounting-hole count (Ni)	120
Inner ring mounting-hole specification (Dhi)	39 mm
MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	I
Greasing hole type (Greasing hole type)	R
MOUNTING INTERFACES	
Outer ring mounting	120 holes - External ring hole type Th; Dhe 39 mm
Inner ring mounting	120 holes - Inner ring hole type Th; Dhi 39 mm


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	111
Printed page	111
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-111-curve.webp SHA-256: d19df35741c71760d892ab84d2a7d46e5f9dae077c971061b94c7435f212e03b
Outline Drawing	rollix-page-111-drawing.webp SHA-256: f7e1205a7f4f0a671a2a141973e0dd903a08e1e3e930dcc91d1260191c7512e5

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

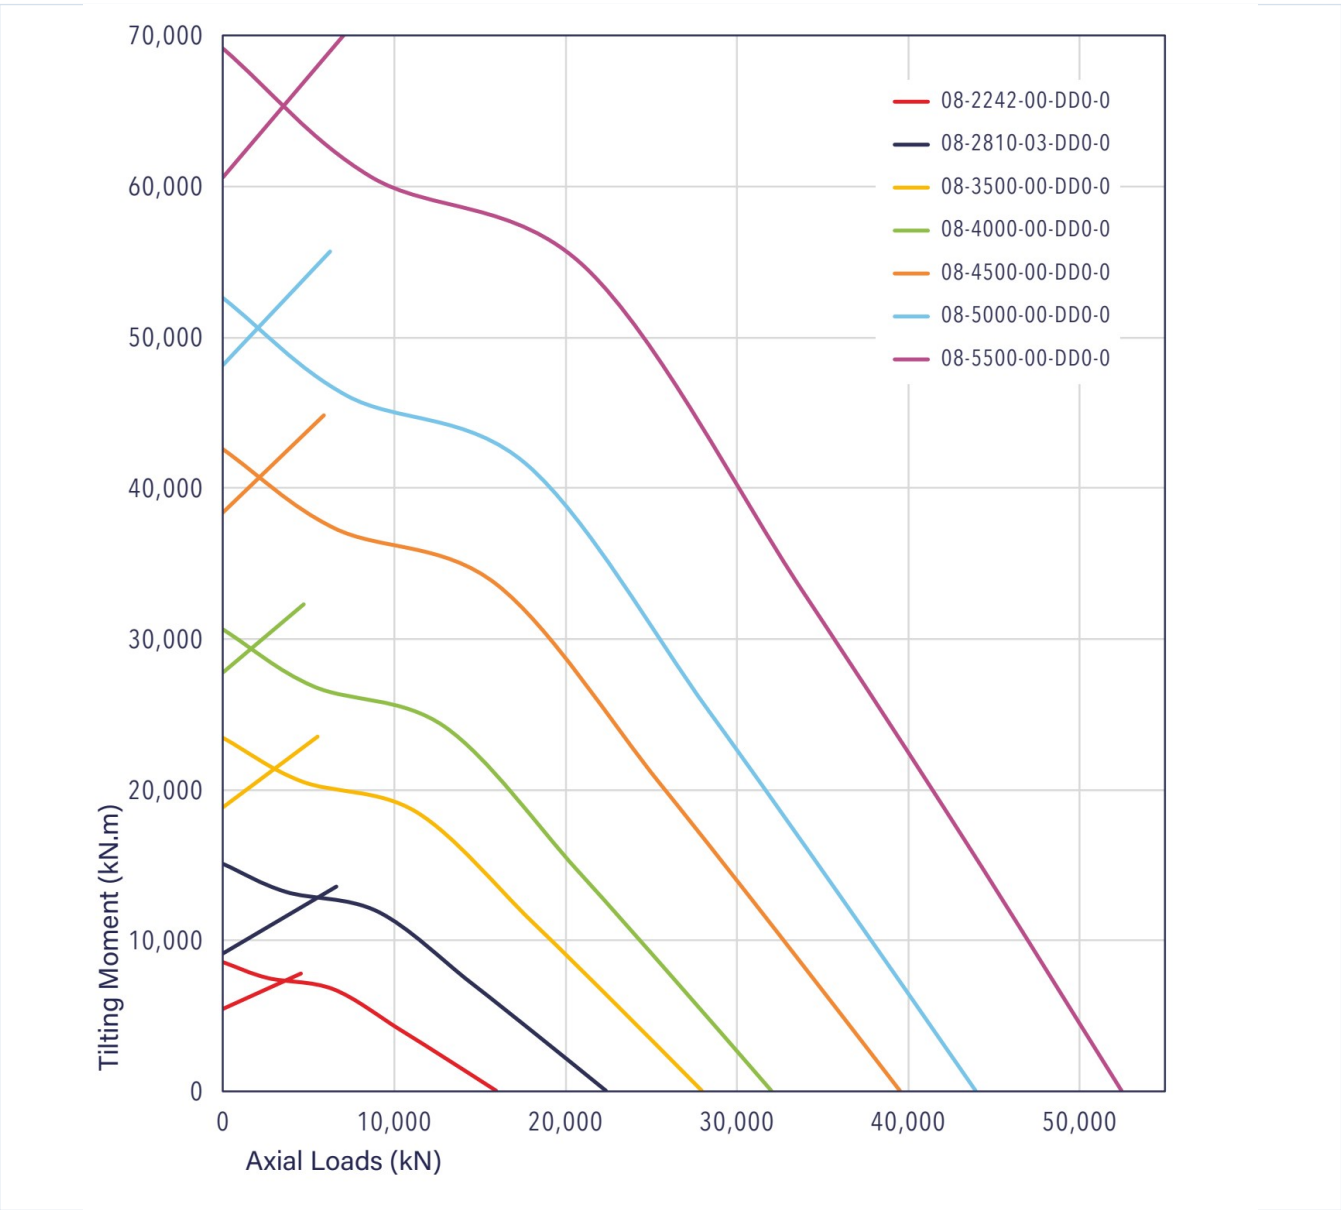

rollix-page-111-curve.webp | SHA-256: d19df35741c71760d892ab84d2a7d46e5f9dae077c971061b94c7435f212e03b

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID 3HHMPMT7CZOCERFFBCNAHNTSV2	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 111 Printed page 111
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/rollix/08-4000-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.