

Factory-Verified Replacement

MERYDOM 32-1091-01

Certified for interchange with ROLLIX 32-1091-01. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL
32-1091-01

REFERENCE
ROLLIX 32-1091-01

SERIES
32 Series

STRUCTURE
Rolamento de esferas de s rie leve


OVERALL OD
1,166 mm

OVERALL ID
986 mm

OVERALL HEIGHT
56 mm

GEAR
Engrenagem interna

Published Technical Drawing

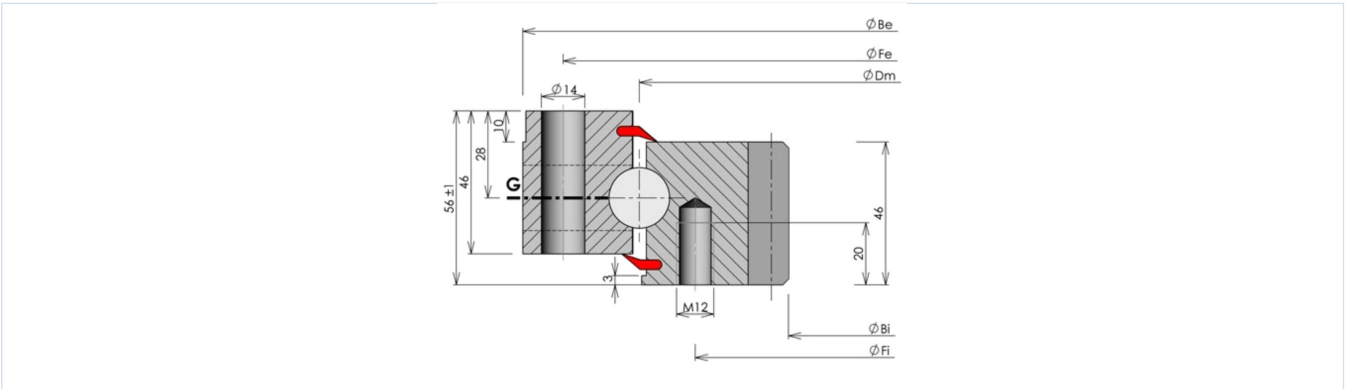

rollix-page-095-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	32-1091-01
Certified interchangeable with	ROLLIX 32-1091-01
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	ZG6NDDBOWXBR67JHOYICC7GKRK
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	32 Series
Reference model	32-1091-01
Bearing structure	Rolamento de esferas de s rie leve
Gear arrangement	Engrenagem interna
DIMENSION	
Overall height (HT)	56 mm
Overall outside diameter (Dia De)	1.166 mm
Outer ring height (He)	46 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	986 mm
Inner ring height (Hi)	46 mm
Assembly weight (Weight)	91 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	1.164 mm
Inner ring pilot diameter (Dia Ci)	1.089 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	1.140 mm
Outer ring mounting-hole count (Ne)	48
Outer ring mounting-hole specification (Dhe)	14 mm
Inner ring hole type (Inner ring hole type)	Bd
Inner ring bolt circle (Dia Fi)	1.055 mm
Inner ring mounting-hole count (Ni)	48
Inner ring mounting-hole specification (Dhi)	M12 mm
GEAR	
Gear module (Module)	8 mm
Gear tooth count (Z)	125
Gear face width (W)	46 mm
PERFORMANCE	
Gear capacity, unhardened (Gear capacity unhardened)	54 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	E
Greasing hole type (Greasing hole type)	R
PERFORMANCE RATINGS	
Rating Gear Capacity Unhardened	54 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	48 holes - External ring hole type Th; Dhe 14 mm
Inner ring mounting	48 holes - Inner ring hole type Bd; Dhi M12 mm
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	125
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	95
Printed page	95
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-095-curve.webp SHA-256: da39b5c4bb522fc898f6acb6a64369a174df31ad2edfdc3d64f0c45e4a403834


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA (CONTINUED)	
Outline Drawing	rollix-page-095-drawing.webp SHA-256: edc883d70438e98afba27006db82e90d761cc1d92be9242fe5c8bf1baf8c23d6

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

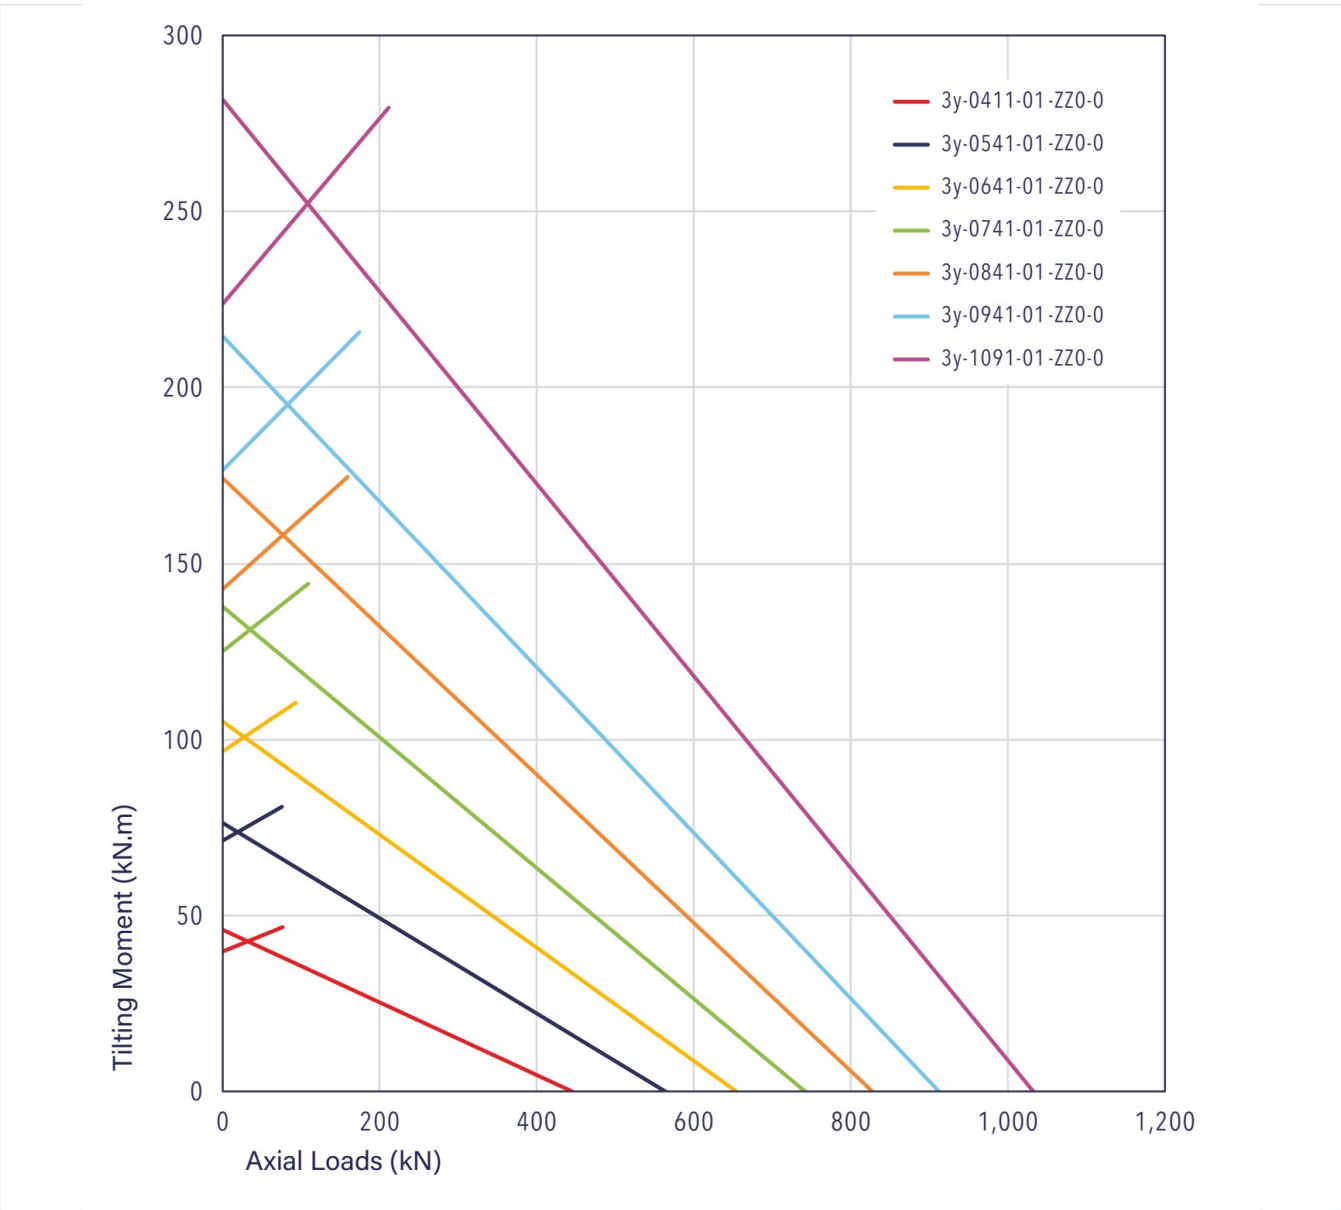

rollix-page-095-curve.webp | SHA-256: da39b5c4bb522fc898f6acb6a64369a174df31ad2edfdc3d64f0c45e4a403834

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID ZG6NDDDBOWXBR67JHOYICC7GKRK	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 95 Printed page 95
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/rollix/32-1091-01/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.