

Factory-Verified Replacement

MERYDOM 88-0297-00

Certified for interchange with ROLLIX 88-0297-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

88-0297-00

REFERENCE

ROLLIX 88-0297-00

SERIES

88 Series

STRUCTURE

Rolamento de rolos de precis o

OVERALL OD

379 mm

OVERALL ID

211 mm


OVERALL HEIGHT

40 mm

GEAR

Sem engrenagem

Published Technical Drawing

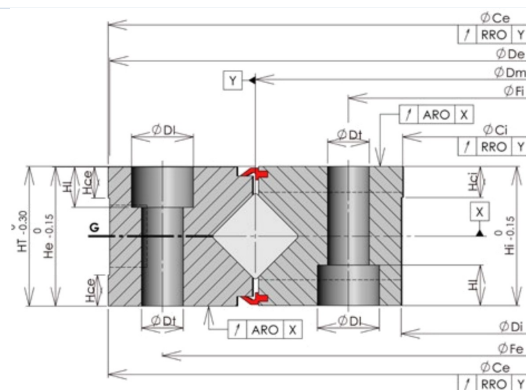

rollix-page-123-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	88-0297-00
Certified interchangeable with	ROLLIX 88-0297-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	S5IQTKWP2U6HWLB3WBKDSOP5QO
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	88 Series
Reference model	88-0297-00
Bearing structure	Rolamento de rolos de precis o
Gear arrangement	Sem engrenagem
DIMENSION	
Overall outside diameter (Dia De)	379 mm
Overall inside diameter (Dia Di)	211 mm
Overall height (HT)	40 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Outer ring height (He)	40 mm
Inner ring height (Hi)	40 mm
Assembly weight (Weight)	21 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	380 mm
Inner ring pilot diameter (Dia Ci)	210 mm
Outer ring pilot height (Hce)	10 mm
Inner ring pilot height (Hci)	10 mm
Common mounting-hole diameter (Dt)	13 mm
Catalog mounting diameter DI (DI)	20 mm
Catalog mounting height HI (HI)	13 mm
Outer ring bolt circle (Fe)	350 mm
Outer ring mounting-hole count (Ne*)	16
Inner ring bolt circle (Fi)	240 mm
Inner ring mounting-hole count (Ni*)	16
PERFORMANCE	
Outer ring axial run-out (BE (ARO))	8 um
Inner ring axial run-out (BI (ARO))	8 um
Outer ring radial run-out (BE (RRO))	8 um
Inner ring radial run-out (BI (RRO))	8 um

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum unloaded starting torque (Maximum starting torque)	35 Nm
Maximum allowable rotation speed (Maximum allowable speed)	115 rpm
PERFORMANCE RATINGS	
Rating Starting Torque Max	35 Nm Not simultaneous with other listed dynamic ratings
Axial Runout Outer	8 um Not simultaneous with other listed dynamic ratings
Axial Runout Inner	8 um Not simultaneous with other listed dynamic ratings
Rating Speed Max	115 rpm Not simultaneous with other listed dynamic ratings
Radial Runout Outer	8 um Not simultaneous with other listed dynamic ratings
Radial Runout Inner	8 um Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	16 holes - Dt 13 mm; DI 20 mm; HI 13 mm
Inner ring mounting	16 holes - Dt 13 mm; Hci 10 mm
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	123
Printed page	123
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-123-curve.webp SHA-256: 4b883ab9c90f70bb998acc83b4e9fdd2767552ae8fa0450baa3c2fc06ea10c27
Outline Drawing	rollix-page-123-drawing.webp SHA-256: 42042e4c05ef1edfa6a6d35c367c172cb374033944560d6cb49df38a8cdfc012

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

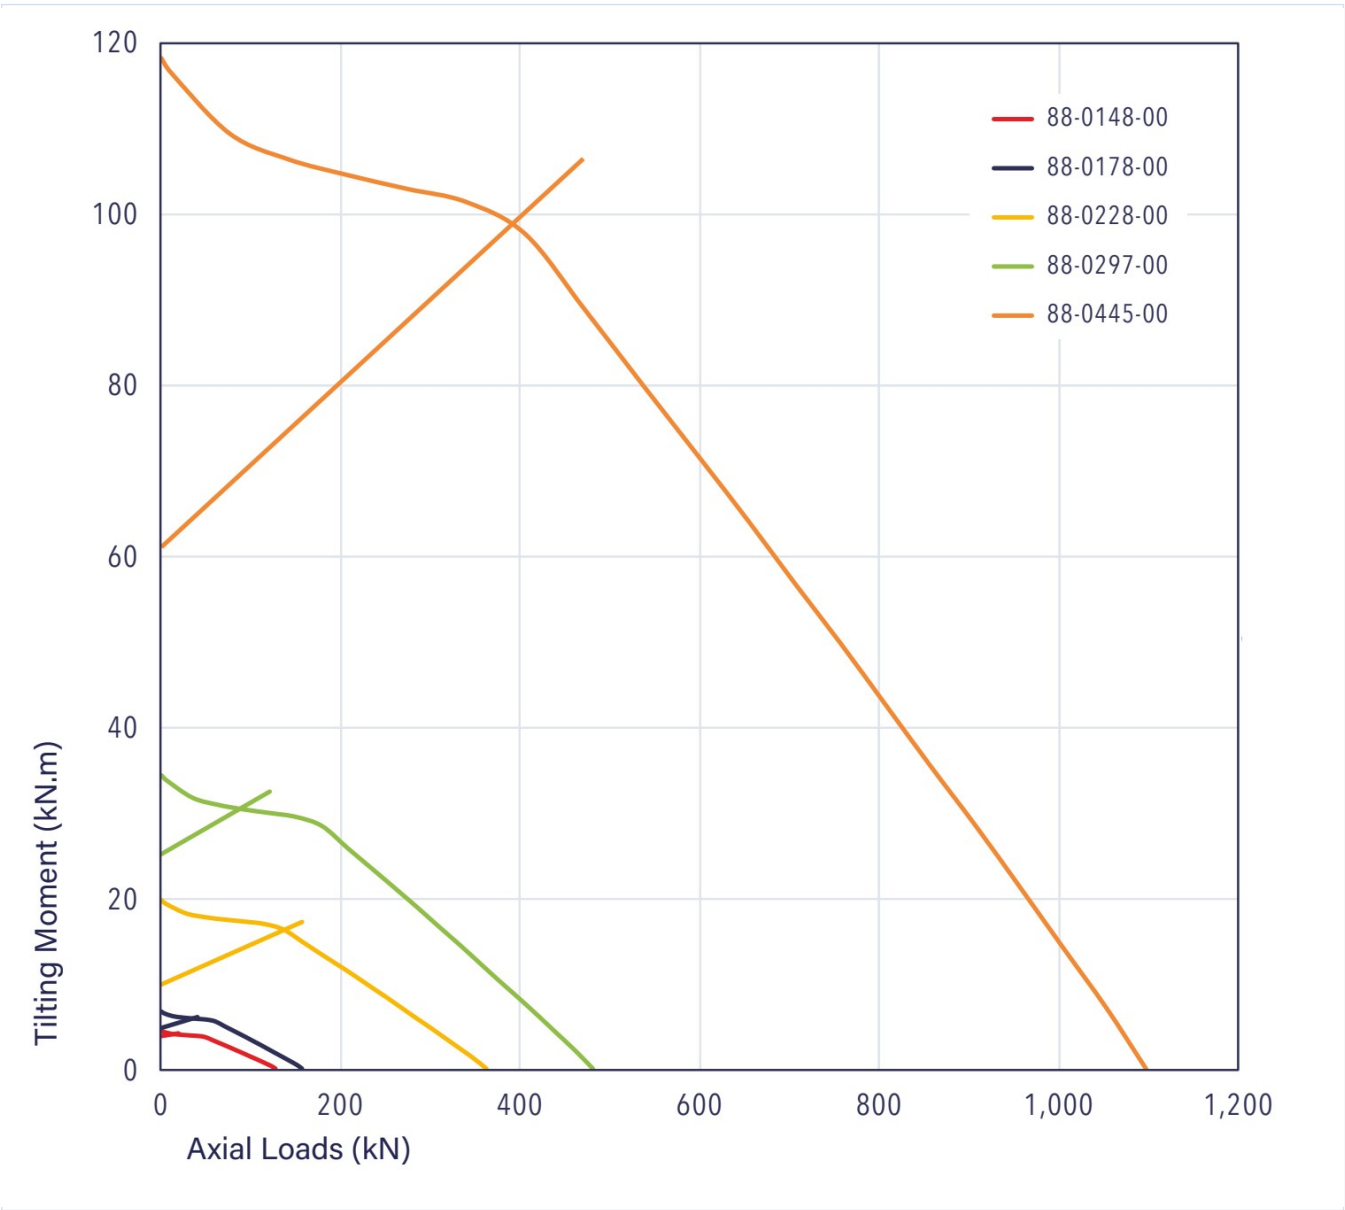

rollix-page-123-curve.webp | SHA-256: 4b883ab9c90f70bb998acc83b4e9fdd2767552ae8fa0450baa3c2fc06ea10c27

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID S5IQTKWP2U6HWLB3WBKDSOP5QO	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 123 Printed page 123
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/rollix/88-0297-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.