

Factory-Verified Replacement

MERYDOM 062.25.1155.575.11.1403

Certified for interchange with Rothe Erde 062.25.1155.575.11.1403. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

062.25.1155.575.11.1403

SERIES

06 Series

OVERALL OD

1,253 mm

OVERALL HEIGHT

80 mm

REFERENCE

Rothe Erde 062.25.1155.575.11.1403

STRUCTURE

Esferas de contato de quatro pontos de uma carreira


OVERALL ID

1,010 mm

GEAR

Engrenagem interna

Published Technical Drawing

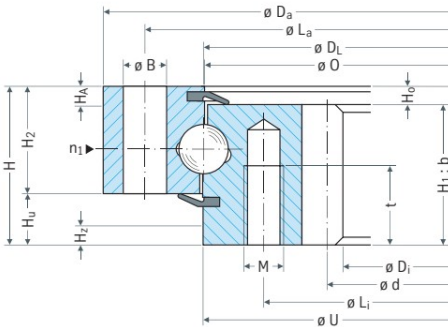

page-072-outline.png

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	062.25.1155.575.11.1403
Certified interchangeable with	Rothe Erde 062.25.1155.575.11.1403
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	NU4D44SUSXJPBHAFFZ22VQ4B5HT
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Rothe Erde
Reference series	06 Series
Reference model	062.25.1155.575.11.1403
Bearing structure	Esferas de contato de quatro pontos de uma carreira
Gear arrangement	Engrenagem interna
DIMENSION	
Raceway diameter (DL)	1.155 mm
Overall outside diameter (Da)	1253 - 0,20 mm
Overall inside diameter (Di)	1.010 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	80 mm
Catalog diameter O (O)	1.154 mm
Catalog diameter U (U)	1155 - 0,17 mm
Ring height H1 (H1)	71 mm
Ring height H2 (H2)	54 mm
Lower ring offset Hu (Hu)	26 mm
Upper ring offset Ho (Ho)	9 mm
Assembly weight (Weight)	183 kg
Combined axial/radial bearing play range (Y_axial_radial)	0 to 0,06 mm
MOUNTING	
Outer ring bolt circle (La)	1.215 mm
Inner ring bolt circle (Li)	1.094 mm
Common mounting-hole count (n)	36
Common mounting-hole diameter (B)	22 mm
Metric bolt nominal size (M)	20 mm
Thread depth (t)	40 mm
GEAR	
Gear pitch diameter (d)	1.030 mm
Gear module (m)	10 mm
Gear tooth count (z)	103

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR (CONTINUED)	
Minimum gear face width (bmin)	70 mm
PERFORMANCE	
Permitted circumferential force, normal (X1)	39,58 kN
Permitted circumferential force, maximum (X2)	79,16 kN
MISCELLANEOUS	
Grease nipple count (n1)	6
PERFORMANCE RATINGS	
Catalog Reference X1	39,58 kN Not simultaneous with other listed dynamic ratings
Catalog Reference X2	79,16 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	36 holes - B 22
Inner ring mounting	36 holes - M 20
GEAR INTERFACE	
Pitch system	module
Module reference	10 mm
Number of teeth	103
SOURCE TRACEABILITY	
Source document code	ROTHE_ERDE_CATALOG_2023
Source file	Rothe Erde.pdf
PDF page	72
Printed page	138-139

Complete Product Data


All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	page-072-load-curves.png SHA-256: 4d8f48a27015a99a15426bf2c227d4cea5a8ea7cff2088282b000d04cd0cf693
Outline Drawing	page-072-outline.png SHA-256: 18fac33e1aba0fefe9cf0b4e144fef9ea8518c674ad028dc72af1a88d6ed7eac


Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

Static boundary load curves

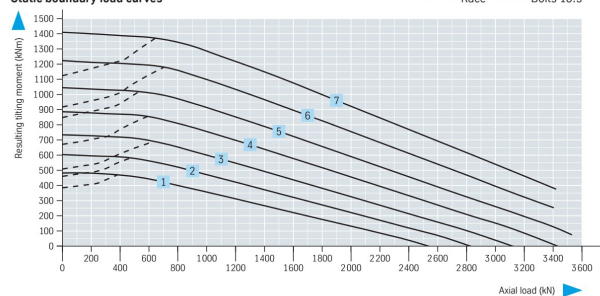

Utilization period curves – 30 000 revolutions

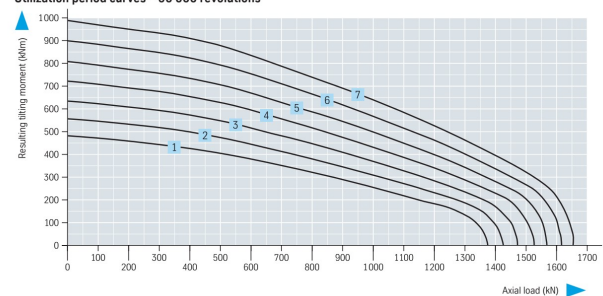

page-072-load-curves.png | SHA-256: 4d8f48a27015a99a15426bf2c227d4cea5a8ea7cff2088282b000d04cd0cf693

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**NU4D44SUSXJPBHAFZ22VQ4B5HT****SOURCE DOCUMENT****ROTHE_ERDE_CATALOG_2023****SOURCE FILE****Rothe Erde.pdf****SOURCE LOCATION****PDF page 72 | Printed page 138-139****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page:

<https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/rothe-erde/062-25-1155-575-11-1403/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.