

Factory-Verified Replacement

MERYDOM RKS.121390101002

Certified for interchange with SKF RKS.121390101002. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

RKS.121390101002

REFERENCE

SKF RKS.121390101002

SERIES

SKF_ROLLER_CUSTOM_EXTERNAL Series

STRUCTURE

Crossed Cylindrical Roller

OVERALL OD

695 mm

OVERALL ID

477 mm


OVERALL HEIGHT

77 mm

GEAR

Engrenagem externa

Published Technical Drawing

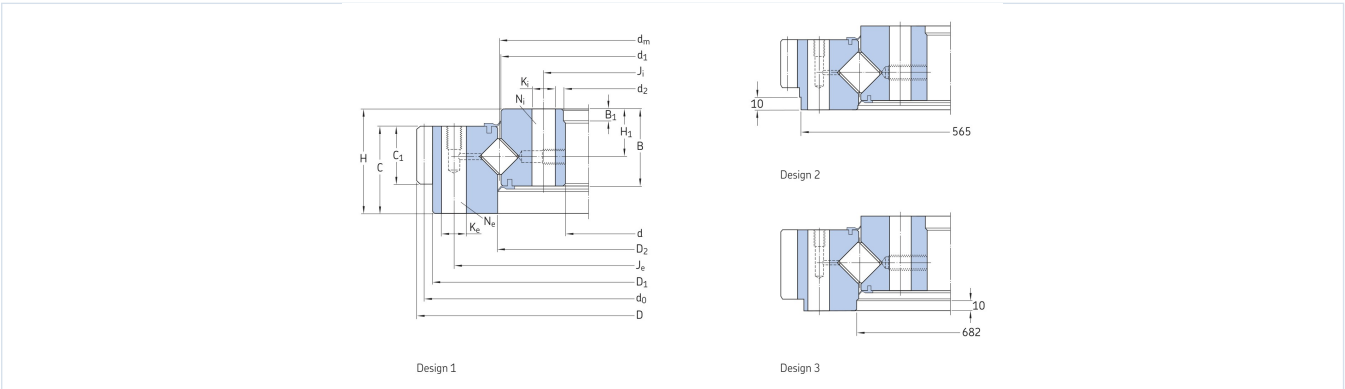

skf-p104-outline-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKS.121390101002
Certified interchangeable with	SKF RKS.121390101002
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	MI64TAQW5X7M2TWOUJUQXF2SIM
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	SKF
Reference series	SKF_ROLLER_CUSTOM_EXTERNAL Series
Reference model	RKS.121390101002
Bearing structure	Crossed Cylindrical Roller
Gear arrangement	Engrenagem externa
DIMENSION	
Raceway diameter (dm)	574 mm
Overall outside diameter (D)	695 mm
Overall inside diameter (d)	477 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	77 mm
SKF catalogue dimension H1 (H1)	35 mm
SKF catalogue dimension D1 (D1)	671 mm
SKF catalogue dimension D2 (D2)	576 mm
SKF catalogue dimension C (C)	64 mm
SKF catalogue dimension C1 (C1)	42 mm
SKF catalogue dimension d1 (d1)	572 mm
SKF catalogue dimension d2 (d2)	480 mm
SKF catalogue dimension B (B)	57 mm
SKF catalogue dimension B1 (B1)	9 mm
Mass (Mass)	79 kg
PERFORMANCE	
Basic dynamic axial load rating (C)	339 kN
Basic static axial load rating (C0)	1.280 kN
PERFORMANCE RATINGS	
Basic Dynamic Axial	339 kN
Basic Static Axial	1.280 kN
MOUNTING INTERFACES	
Outer ring mounting	holes -
Inner ring mounting	holes -


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE	
Pitch system	Not published
SOURCE TRACEABILITY	
Source document code	SKF_SLEWING_BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
Source file	SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf
PDF page	104
Printed page	104
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	skf-p105-load-curve.webp SHA-256: 71cf6a31f9c182ae1bc1aa5aa97e02f7db3df4a6ff2a9ec05b0f298443d669d1
Outline Drawing	skf-p104-outline-drawing.webp SHA-256: 44cc4ecced7cddc946d17c9abf5ebc7939d7c29f5805a7fdcce8065868a7128e

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

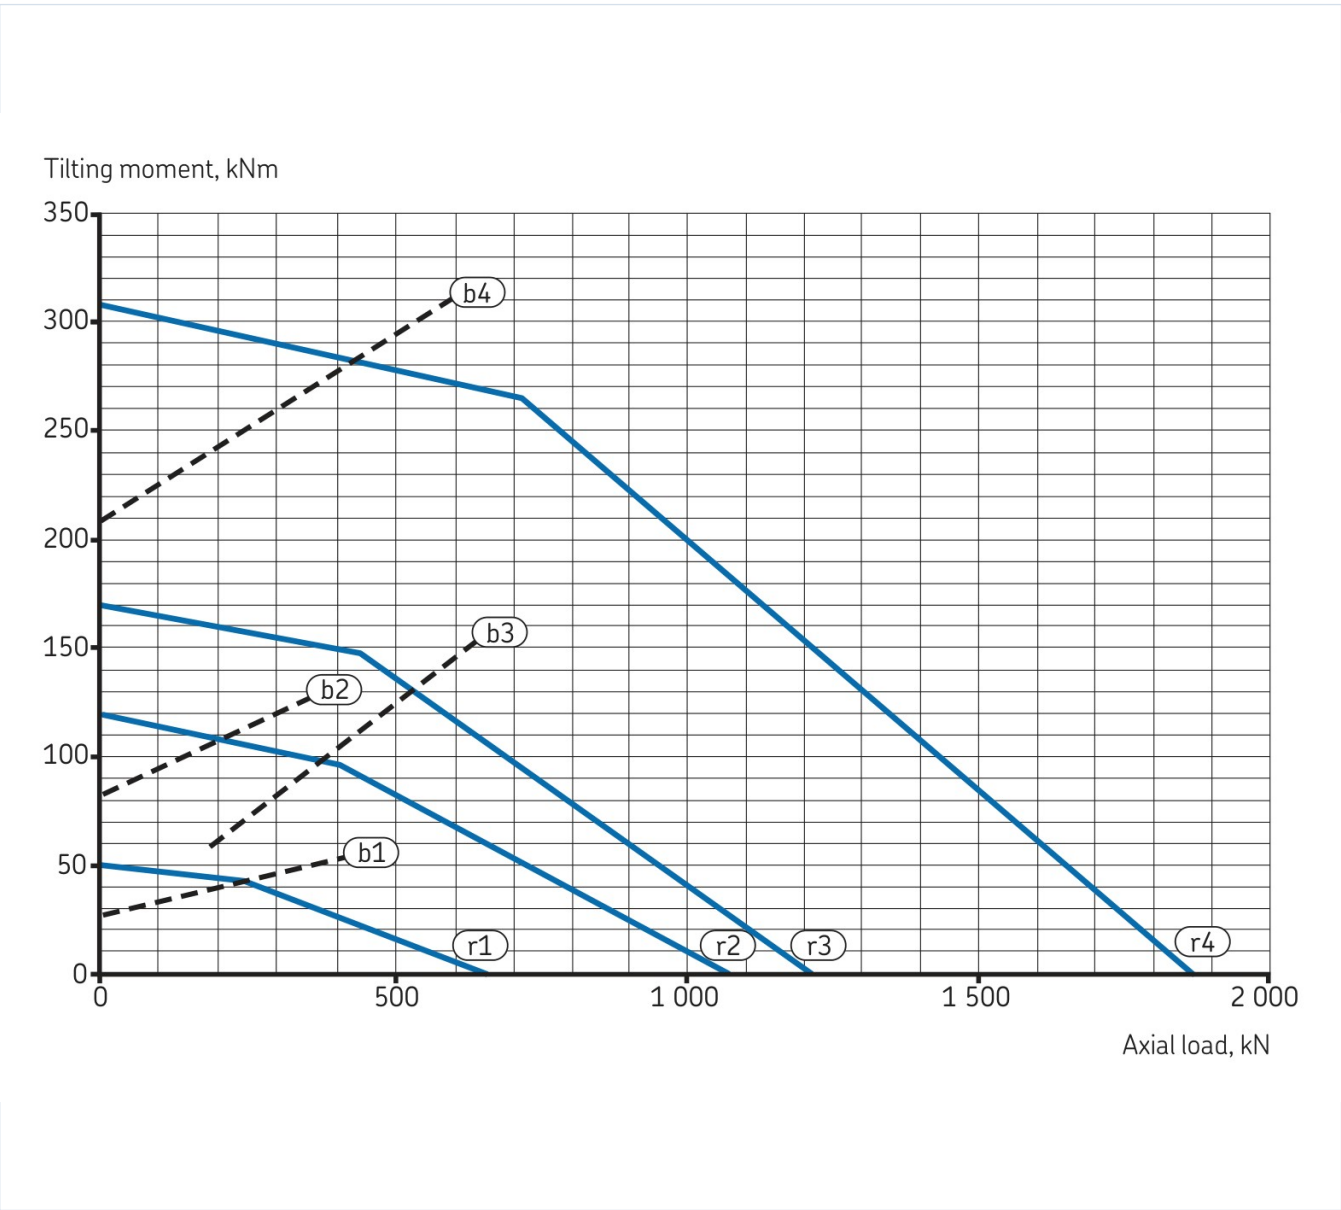

skf-p105-load-curve.webp | SHA-256: 71cf6a31f9c182ae1bc1aa5aa97e02f7db3df4a6ff2a9ec05b0f298443d669d1

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

MI64TAQW5X7M2TWOUJUQXF2SIM

SOURCE FILE

SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

SKF_SLEWING BEARINGS_PUB_BU_P2_06115_3_EN_2019_09

SOURCE LOCATION

PDF page 104 | Printed page 104

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/skf/rks-121390101002/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.