

Factory-Verified Replacement

MERYDOM RKS.160.14.1094

Certified for interchange with SKF RKS.160.14.1094. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

RKS.160.14.1094

REFERENCE

SKF RKS.160.14.1094

SERIES

SKF_ROLLER_MEDIUM_UNGEARED Series

STRUCTURE

Crossed Cylindrical Roller

OVERALL OD

1,166 mm

OVERALL ID

1,024 mm


OVERALL HEIGHT

mm

GEAR

Sem engrenagem

Published Technical Drawing

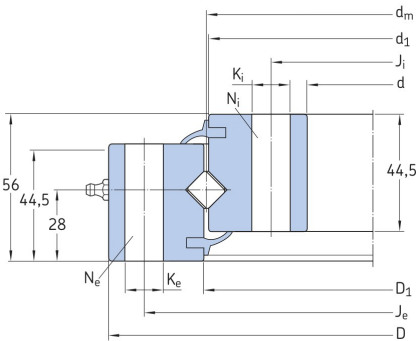

skf-p100-outline-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKS.160.14.1094
Certified interchangeable with	SKF RKS.160.14.1094
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	6W3JBT3UVIHH5RE7FVHJHUY5OI
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	SKF
Reference series	SKF_ROLLER_MEDIUM_UNGEARED Series
Reference model	RKS.160.14.1094
Bearing structure	Crossed Cylindrical Roller
Gear arrangement	Sem engrenagem
DIMENSION	
Raceway diameter (dm)	1.094 mm
Overall outside diameter (D)	1.166 mm
SKF catalogue dimension D1 (D1)	1.096 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (d)	1.024 mm
SKF catalogue dimension d1 (d1)	1.092 mm
Mass (Mass)	77 kg
MOUNTING	
Outer ring bolt circle (Je)	1 mm
Outer ring mounting-hole specification (Ke)	14.014 mm
Outer ring mounting-hole count (Ne)	48 count
Inner ring bolt circle (Ji)	1.048 mm
Inner ring mounting-hole specification (Ki)	14 mm
Inner ring mounting-hole count (Ni)	48 count
PERFORMANCE	
Basic dynamic axial load rating (C)	279 kN
Basic static axial load rating (C0)	1.450 kN
PERFORMANCE RATINGS	
Basic Dynamic Axial	279 kN
Basic Static Axial	1.450 kN
MOUNTING INTERFACES	
Outer ring mounting	48 holes - 14014
Inner ring mounting	48 holes - 14
GEAR INTERFACE	


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE (CONTINUED)	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	SKF_SLEWING_BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
Source file	SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf
PDF page	100
Printed page	100
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	skf-p101-load-curve.webp SHA-256: c2db023253252334631c2a86bcc5056288dea946d601b4154aeb85be0091ee5d
Outline Drawing	skf-p100-outline-drawing.webp SHA-256: e3041735a065d1ca437f068231e59a93db95c921f63c8b61c042ed04044ef23d

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

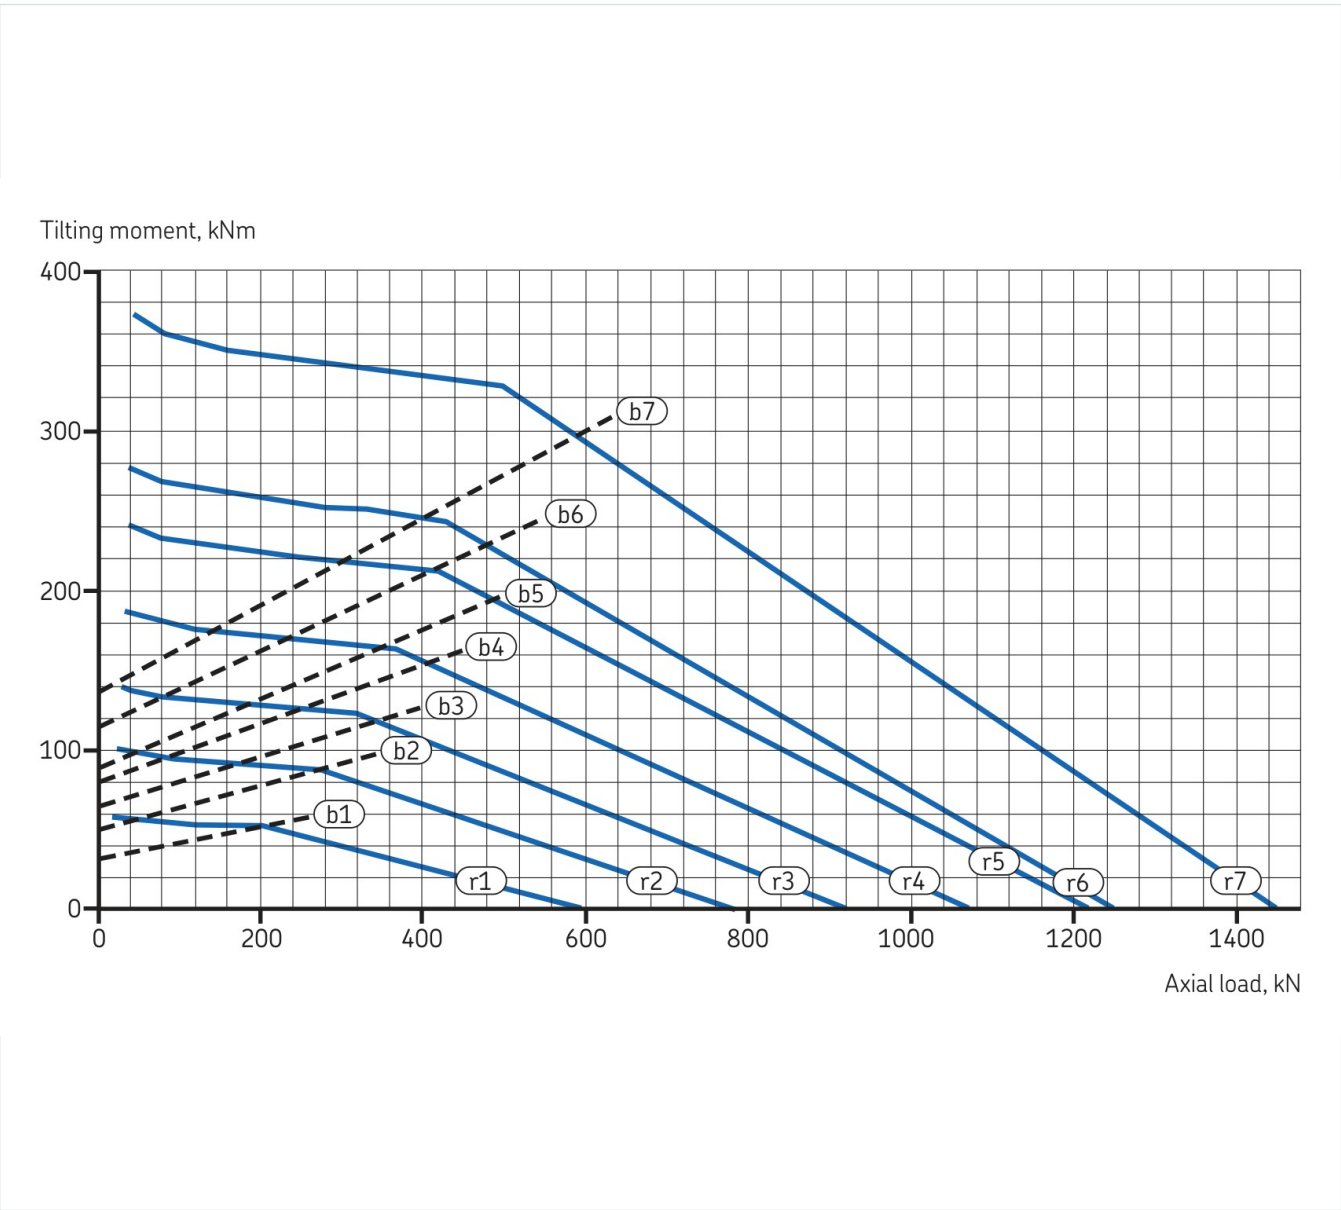

skf-p101-load-curve.webp | SHA-256: c2db023253252334631c2a86bcc5056288dea946d601b4154aeb85be0091ee5d

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

6W3JBT3UVIHH5RE7FVHJHUY5OI

SOURCE FILE

SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

SKF_SLEWING BEARINGS_PUB_BU_P2_06115_3_EN_2019_09

SOURCE LOCATION

PDF page 100 | Printed page 100

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/skf/rks-160-14-1094/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.