

Factory-Verified Replacement

MERYDOM RKS.162.20.1904

Certified for interchange with SKF RKS.162.20.1904. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

RKS.162.20.1904

REFERENCE

SKF RKS.162.20.1904

SERIES

SKF_ROLLER_MEDIUM_INTERNAL Series

STRUCTURE

Crossed Cylindrical Roller

OVERALL OD

2,012 mm

OVERALL ID

1,729 mm


OVERALL HEIGHT

mm

GEAR

Engrenagem interna

Published Technical Drawing

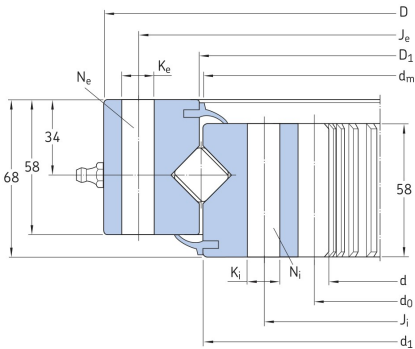

skf-p098-outline-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	RKS.162.20.1904
Certified interchangeable with	SKF RKS.162.20.1904
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	7GI6MOJJL4MLBNFKFIY34WVEMH
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	SKF
Reference series	SKF_ROLLER_MEDIUM_INTERNAL Series
Reference model	RKS.162.20.1904
Bearing structure	Crossed Cylindrical Roller
Gear arrangement	Engrenagem interna
DIMENSION	
Raceway diameter (dm)	1.904 mm
Overall outside diameter (D)	2.012 mm
SKF catalogue dimension D1 (D1)	1.906,5 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (d)	1.729 mm
SKF catalogue dimension d1 (d1)	1.902 mm
Mass (Mass)	305 kg
MOUNTING	
Outer ring bolt circle (Je)	1 mm
Outer ring mounting-hole specification (Ke)	96.822 mm
Outer ring mounting-hole count (Ne)	64 count
Inner ring bolt circle (Ji)	1.840 mm
Inner ring mounting-hole specification (Ki)	22 mm
Inner ring mounting-hole count (Ni)	64 count
PERFORMANCE	
Basic dynamic axial load rating (C)	644 kN
Basic static axial load rating (C0)	3.950 kN
PERFORMANCE RATINGS	
Basic Dynamic Axial	644 kN
Basic Static Axial	3.950 kN
MOUNTING INTERFACES	
Outer ring mounting	64 holes - 96822
Inner ring mounting	64 holes - 22
GEAR INTERFACE	

Complete Product Data


All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

GEAR INTERFACE (CONTINUED)	
Pitch system	Not published
SOURCE TRACEABILITY	
Source document code	SKF_SLEWING_BEARINGS_PUB_BU_P2_06115_3_EN_2019_09
Source file	SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf
PDF page	98
Printed page	98
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	skf-p099-load-curve.webp SHA-256: 8c292508d290000b3658aa197af8ab18d7b3451031e817ad6f1e91003841ab26
Outline Drawing	skf-p098-outline-drawing.webp SHA-256: 919b8a8ba1829e730487420daebc1849b7b0acd9124110d3064e73c8c3b8a713

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

Tilting moment, kNm

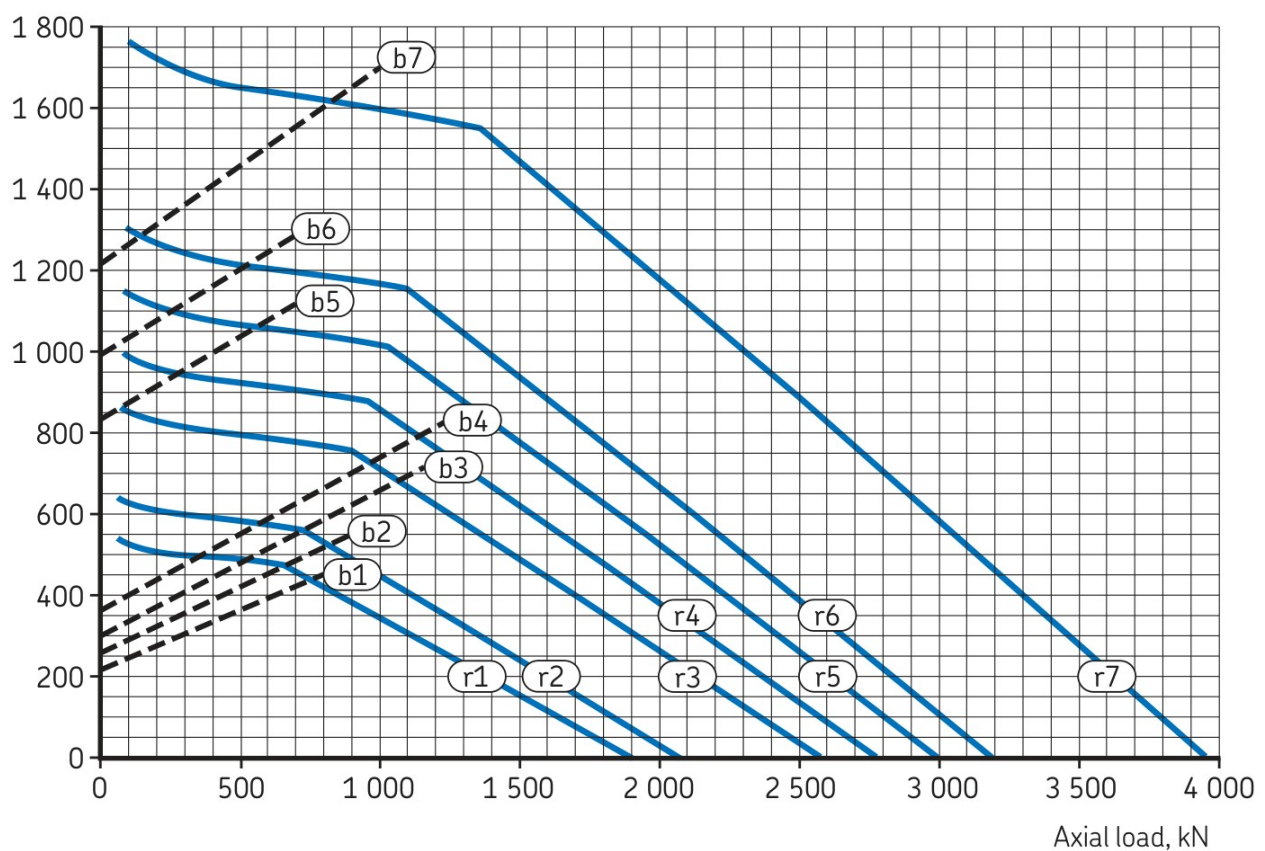

skf-p099-load-curve.webp | SHA-256: 8c292508d290000b3658aa197af8ab18d7b3451031e817ad6f1e91003841ab26

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

7GI6MOJJL4MLBNFKFIY34WVEMH

SOURCE FILE

SKF_Slewing_Bearings_PUB_BU_P2_06115_3_EN_2019-09.pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

SKF_SLEWING BEARINGS_PUB_BU_P2_06115_3_EN_2019_09

SOURCE LOCATION

PDF page 98 | Printed page 98

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/skf/rks-162-20-1904/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.