

Factory-Verified Replacement

MERYDOM ROD02000-026DA15-900-000

Certified for interchange with Liebherr ROD02000-026DA15-900-000. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

ROD02000-026DA15-900-000

REFERENCE

Liebherr ROD02000-026DA15-900-000

SERIES

ROD_26_DA Series

STRUCTURE

s ral makaral

OVERALL OD

2,268.8 mm

OVERALL ID

1,819 mm


OVERALL HEIGHT

147 mm

GEAR

D tan di li

Published Technical Drawing

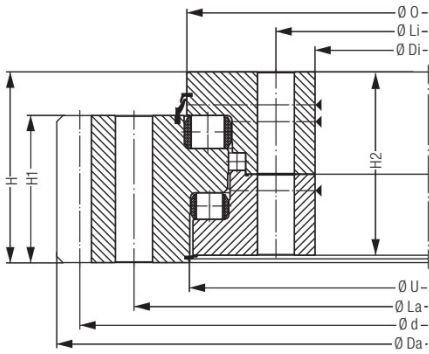

liebherr-page-137-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	ROD02000-026DA15-900-000
Certified interchangeable with	Liebherr ROD02000-026DA15-900-000
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	H3OE5VJRDLA32XPT3XASSKZJQV
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Liebherr
Reference series	ROD_26_DA Series
Reference model	ROD02000-026DA15-900-000
Bearing structure	s ral makaral
Gear arrangement	D tan di li
DIMENSION	
Mass (Weight)	1 216 kg
Overall outside diameter (Da)	2 268,8 mm
Overall inside diameter (Di)	1 819 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	147 mm
Liebherr catalogue dimension O (O)	2 036 mm
Liebherr catalogue dimension U (U)	2 026 mm
Liebherr catalogue dimension H1 (H1)	117 mm
Liebherr catalogue dimension H2 (H2)	138 mm
MOUNTING	
Outer ring bolt circle (La)	2 125 mm
Inner ring bolt circle (Li)	1 885 mm
La/Li mounting-hole count (n)	44
Mounting fastener specification (M)	30
Liebherr catalogue count n1 (n1)	7
GEAR	
Gear pitch diameter (d)	2 224 mm
Gear module (m)	16 mm
Gear tooth count (z)	139
Addendum modification product x^*m (x^*m)	8 mm
Liebherr catalogue gear dimension k^*m (k^*m)	-1,6 mm
Gear face width (b)	117 mm
PERFORMANCE	
Standard tooth force (Fz standard)	162,7 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum tooth force (Fz maximum)	325,4 kN
Static load rating (Cstat)	19 065 kN
Dynamic load rating (Cdyn)	2,156 D_DOR kN
PERFORMANCE RATINGS	
Rating Static	19 065 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	325,4 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Standard	162,7 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	44 holes - 30
Inner ring mounting	44 holes - 30
GEAR INTERFACE	
Pitch system	module
Module reference	16 mm
Number of teeth	139
SOURCE TRACEABILITY	
Source document code	LIEBHERR-SLEWING-BEARINGS-PRODUCT-CATALOGUE-2018
Source file	liebherr-slewing-bearings-product-catalogue-pt-metric-web.pdf
PDF page	137
Printed page	137
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Mixed_metric_dp_threads
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	liebherr-page-137-curve.webp SHA-256: df8db462518c85bec147d243596dd7f4a36a822a313e4022c65e141af191da7c
Outline Drawing	liebherr-page-137-drawing.webp SHA-256: c4dc701ffa269a34556bbbf91f50fad70bfdc8991fb99531717aa161efe58484

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

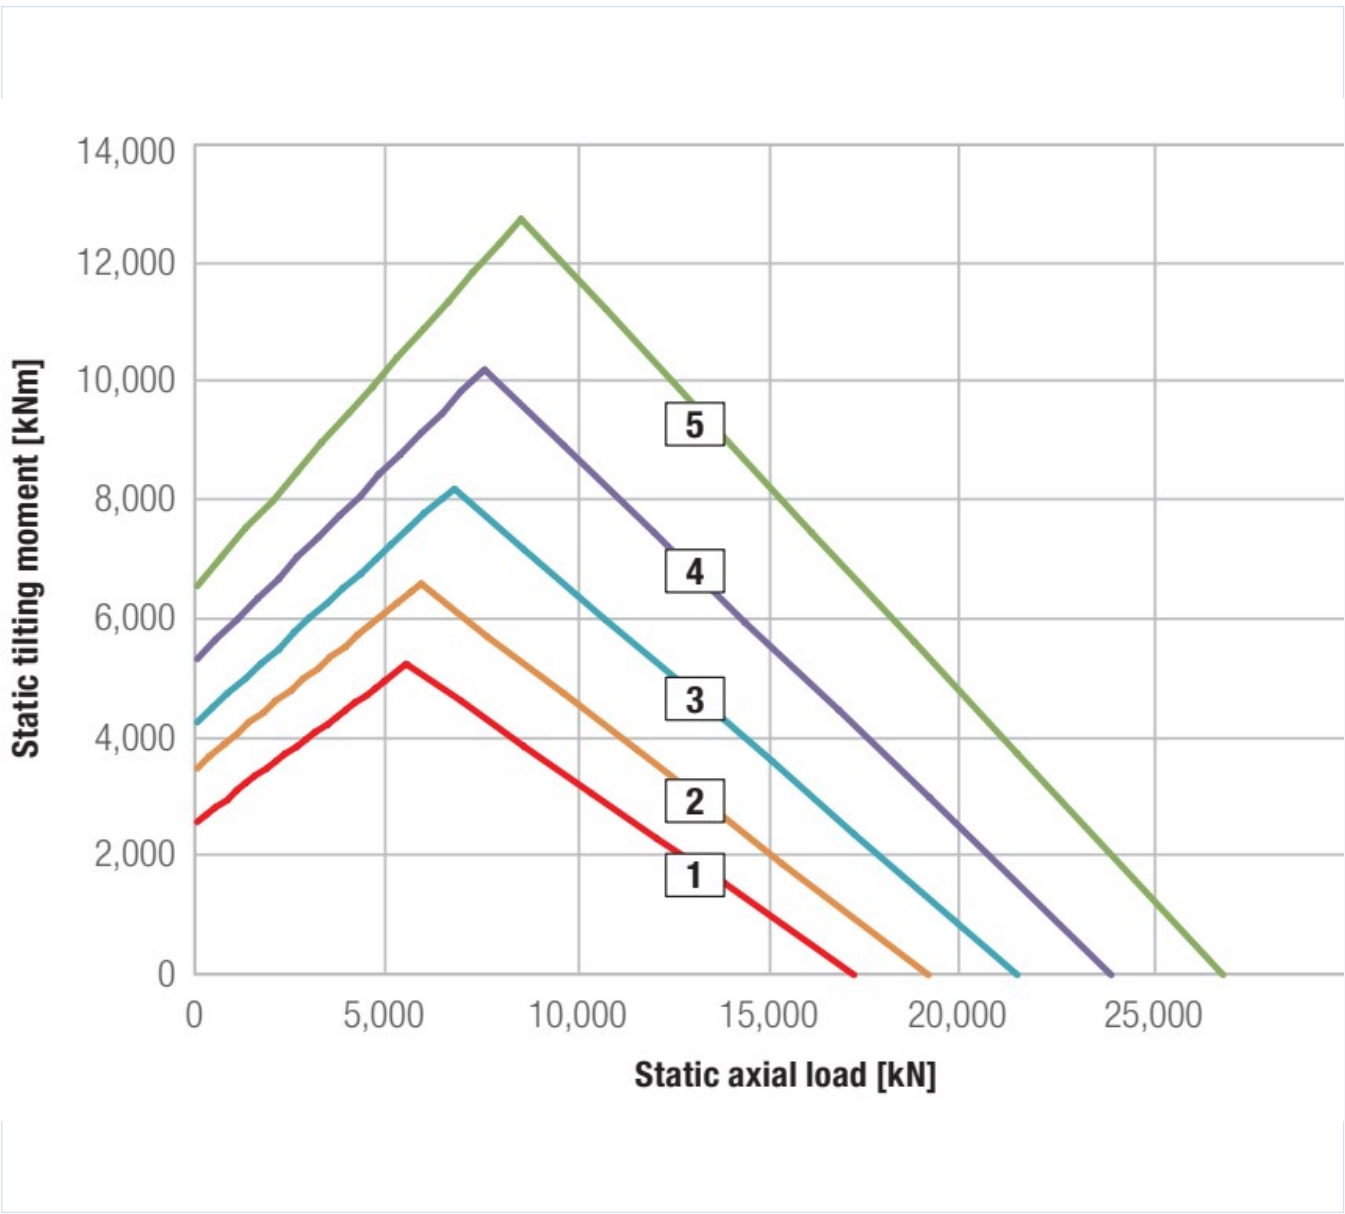

liebherr-page-137-curve.webp | SHA-256: df8db462518c85bec147d243596dd7f4a36a822a313e4022c65e141af191da7c

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID H3OE5VJRDLA32XPT3XASSKZJQV	SOURCE DOCUMENT LIEBHERR-SLEWING-BEARINGS-PRODUCT-CA TALOGUE-2018
SOURCE FILE liebherr-slewing-bearings-product-ca talogue-pt-metric-web.pdf	SOURCE LOCATION PDF page 137 Printed page 137
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/tr/urunler/muadil-doner-tabla-rulmanlari/liebherr/rod02000-026da15-900-000/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.