

Factory-Verified Replacement

MERYDOM 07-0573-00

Certified for interchange with ROLLIX 07-0573-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

07-0573-00

REFERENCE

ROLLIX 07-0573-00

SERIES

07 Series

STRUCTURE

Tek s ral apraz makaral

OVERALL OD

665 mm

OVERALL ID

457 mm


OVERALL HEIGHT

60 mm

GEAR

ten di li

Published Technical Drawing

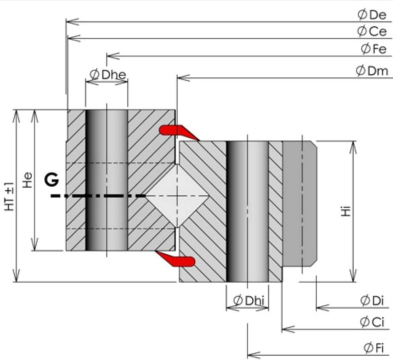

rollix-page-105-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	07-0573-00
Certified interchangeable with	ROLLIX 07-0573-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	PD2S7FZC7KR2GUEWBV3MZOM5QM
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	07 Series
Reference model	07-0573-00
Bearing structure	Tek s ral apraz makaral
Gear arrangement	ten di li
DIMENSION	
Overall height (HT)	60 mm
Overall outside diameter (Dia De)	665 mm
Outer ring height (He)	50 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (Dia Di)	457 mm
Inner ring height (Hi)	50 mm
Assembly weight (Weight)	60 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	660 mm
Inner ring pilot diameter (Dia Ci)	485 mm
Outer ring hole type (External ring hole type)	Th
Outer ring bolt circle (Dia Fe)	630 mm
Outer ring mounting-hole count (Ne)	28
Outer ring mounting-hole specification (Dhe)	17,5 mm
Inner ring hole type (Inner ring hole type)	Th
Inner ring bolt circle (Dia Fi)	517 mm
Inner ring mounting-hole count (Ni)	28
Inner ring mounting-hole specification (Dhi)	17,5 mm
GEAR	
Gear module (Module)	6 mm
Gear tooth count (Z)	77
Gear face width (W)	45 mm
PERFORMANCE	
Gear capacity, unhardened (Gear capacity unhardened)	39 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Gear capacity, hardened (Gear capacity hardened)	52 kN
MISCELLANEOUS	
Ring with greasing holes (Ring with greasing holes)	E
Greasing hole type (Greasing hole type)	R
PERFORMANCE RATINGS	
Rating Gear Capacity Hardened	52 kN Not simultaneous with other listed dynamic ratings
Rating Gear Capacity Unhardened	39 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	28 holes - External ring hole type Th; Dhe 17.5 mm
Inner ring mounting	28 holes - Inner ring hole type Th; Dhi 17.5 mm
GEAR INTERFACE	
Pitch system	module
Module reference	6 mm
Number of teeth	77
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	105
Printed page	105
Source language	EN
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-105-curve.webp SHA-256: 01612d5f19b8b9b5266e046251e856cf4a4cb8e84ccf1a5db2df039841a3a65a
Outline Drawing	rollix-page-105-drawing.webp SHA-256: e66350cc60b400386dd3e03ab66494a28a551dfa0b809733cefe424251ac2de5

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

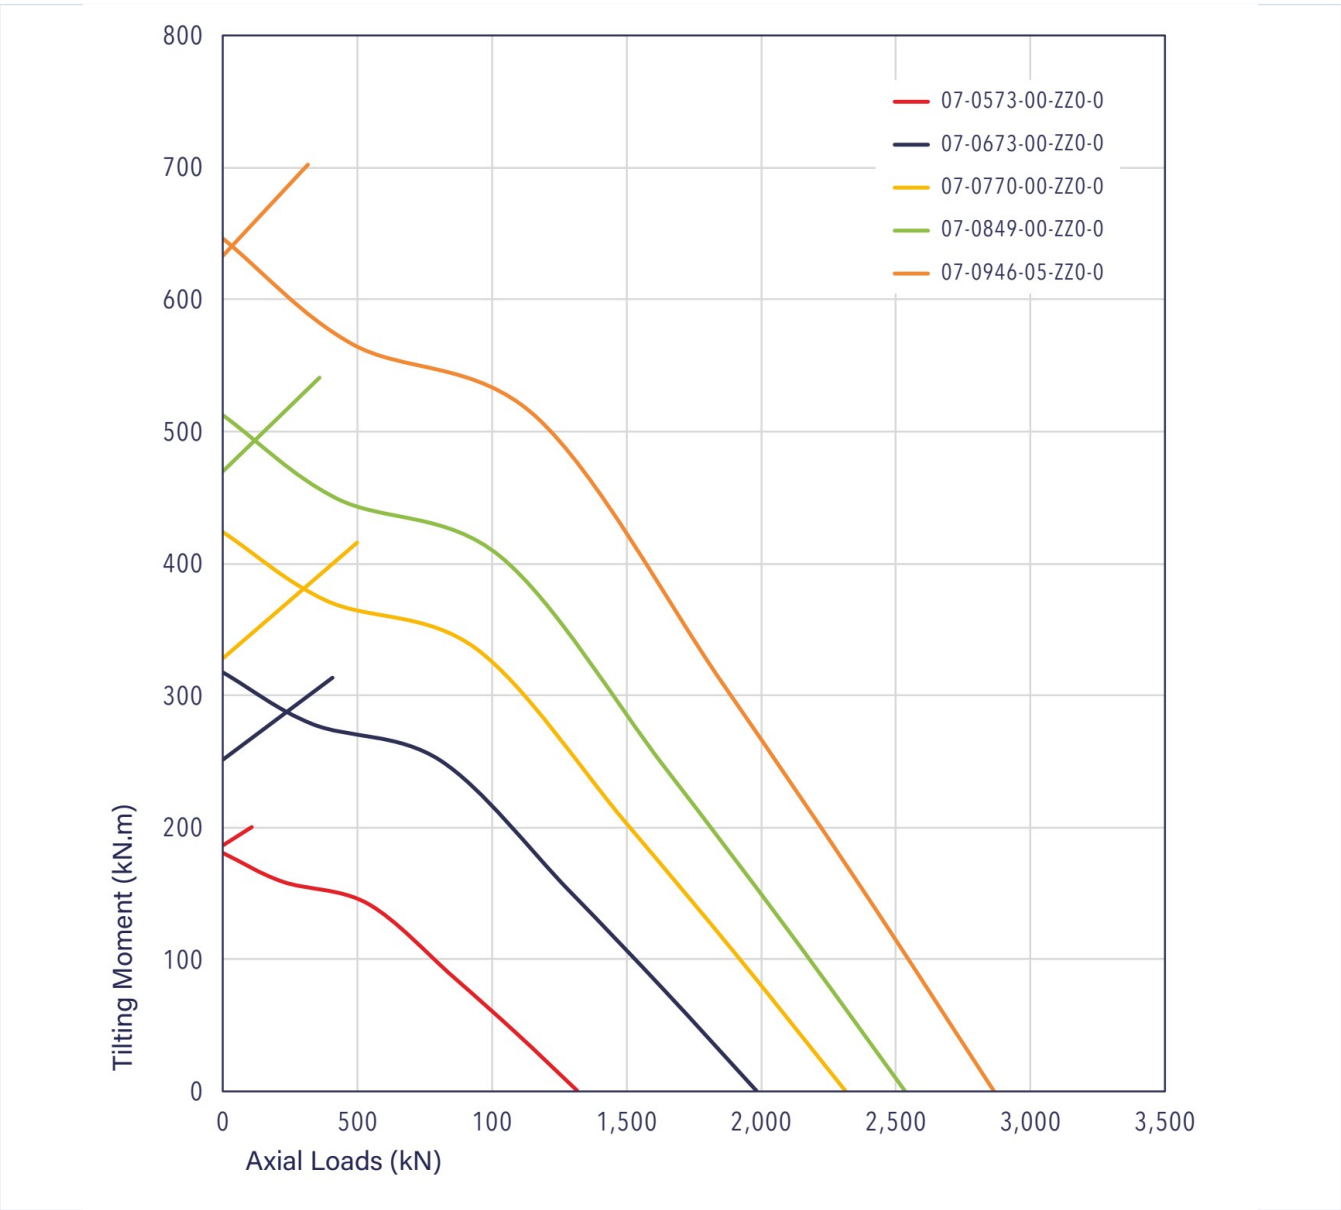

rollix-page-105-curve.webp | SHA-256: 01612d5f19b8b9b5266e046251e856cf4a4cb8e84ccf1a5db2df039841a3a65a

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID PD2S7FZC7KR2GUEWBV3MZOM5QM	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 105 Printed page 105
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/tr/urunler/muadil-doner-tabla-rulmanlari/rollix/07-0573-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.