

Factory-Verified Replacement

MERYDOM 061.40.1800.014.29.1503


Certified for interchange with Rothe Erde 061.40.1800.014.29.1503. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

**LEVEL 3 - MERYDOM ENGINEERING VERIFIED**

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

|                         |                                    |
|-------------------------|------------------------------------|
| MERYDOM MODEL           | REFERENCE                          |
| 061.40.1800.014.29.1503 | Rothe Erde 061.40.1800.014.29.1503 |
| SERIES                  | STRUCTURE                          |
| 06 Series               | Tek s ral d rt nokta temasl bilyal |
| OVERALL OD              | OVERALL ID                         |
| 1,999.2 mm              | 1,666 mm                           |
| OVERALL HEIGHT          | GEAR                               |
| 94 mm                   | D tan di li                        |

Published Technical Drawing

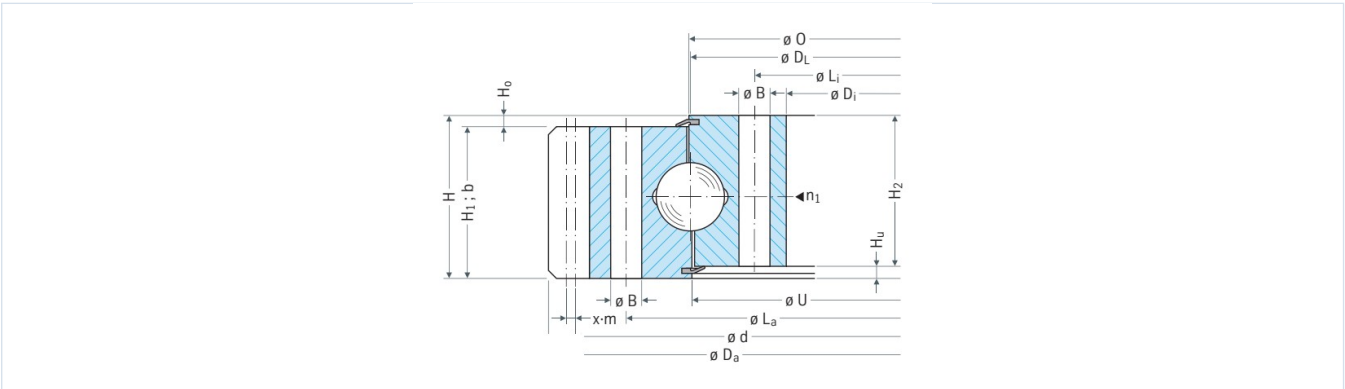

page-077-outline.png

## Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| MERYDOM CERTIFIED PRODUCT            |                                        |
|--------------------------------------|----------------------------------------|
| Product brand                        | MERYDOM                                |
| MERYDOM model                        | 061.40.1800.014.29.1503                |
| Certified interchangeable with       | Rothe Erde 061.40.1800.014.29.1503     |
| Verification status                  | Level 3 - MERYDOM Engineering Verified |
| Reviewed by                          | MERYDOM Engineering Department         |
| Public record UID                    | QCWHGYBQVVPUXY3RMCBX6B3DFF             |
| MATERIALS                            |                                        |
| Configurable ring material options   | 42CrMo / 50Mn                          |
| Seal material                        | NBR - Nitrile rubber                   |
| Configurable spacer material options | Engineering nylon / Brass              |
| IDENTIFICATION                       |                                        |
| Reference brand                      | Rothe Erde                             |
| Reference series                     | 06 Series                              |
| Reference model                      | 061.40.1800.014.29.1503                |
| Bearing structure                    | Tek s ral d rt nokta temasl bilyal     |
| Gear arrangement                     | D tan di li                            |
| DIMENSION                            |                                        |
| Raceway diameter (DL)                | 1 800 mm                               |
| Overall outside diameter (Da)        | 1 999,2 mm                             |
| Overall inside diameter (Di)         | 1 666 mm                               |

## Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| DIMENSION (CONTINUED)                     |          |
|-------------------------------------------|----------|
| Overall height (H)                        | 94 mm    |
| Catalog diameter O (O)                    | 1 801 mm |
| Catalog diameter U (U)                    | 1 798 mm |
| Ring height H1 (H1)                       | 85 mm    |
| Ring height H2 (H2)                       | 81 mm    |
| Lower ring offset Hu (Hu)                 | 13 mm    |
| Upper ring offset Ho (Ho)                 | 9 mm     |
| Assembly weight (Weight)                  | 531 kg   |
| MOUNTING                                  |          |
| Outer ring bolt circle (La)               | 1 882 mm |
| Inner ring bolt circle (Li)               | 1 718 mm |
| Common mounting-hole count (n)            | 44       |
| Common mounting-hole diameter (B)         | 26 mm    |
| Metric bolt nominal size (M)              | 24 mm    |
| GEAR                                      |          |
| Gear pitch diameter (d)                   | 1 960 mm |
| Gear module (m)                           | 14 mm    |
| Gear tooth count (z)                      | 140      |
| Profile shift product x m (x*m)           | 7 mm     |
| Tip-height modification product k m (k*m) | -1,4 mm  |

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

|                                               |                                                                |
|-----------------------------------------------|----------------------------------------------------------------|
| GEAR (CONTINUED)                              |                                                                |
| Minimum gear face width (bmin)                | 84 mm                                                          |
| PERFORMANCE                                   |                                                                |
| Permitted circumferential force, normal (X1)  | 107,94 kN                                                      |
| Permitted circumferential force, maximum (X2) | 215,88 kN                                                      |
| MISCELLANEOUS                                 |                                                                |
| Grease nipple count (n1)                      | 11                                                             |
| PERFORMANCE RATINGS                           |                                                                |
| Catalog Reference X1                          | 107,94 kN   Not simultaneous with other listed dynamic ratings |
| Catalog Reference X2                          | 215,88 kN   Not simultaneous with other listed dynamic ratings |
| MOUNTING INTERFACES                           |                                                                |
| Outer ring mounting                           | 44 holes - M 24                                                |
| Inner ring mounting                           | 44 holes - B 26                                                |
| GEAR INTERFACE                                |                                                                |
| Pitch system                                  | module                                                         |
| Module reference                              | 14 mm                                                          |
| Number of teeth                               | 140                                                            |
| SOURCE TRACEABILITY                           |                                                                |
| Source document code                          | ROTHE_ERDE_CATALOG_2023                                        |
| Source file                                   | Rothe Erde.pdf                                                 |
| PDF page                                      | 77                                                             |
| Printed page                                  | 148-149                                                        |



Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

| SOURCE TRACEABILITY (CONTINUED) |                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------|
| Source language                 | EN                                                                                                     |
| Original unit system            | Metric                                                                                                 |
| PUBLISHED TECHNICAL MEDIA       |                                                                                                        |
| Load Curve Chart                | page-077-load-curves.png   SHA-256:<br>178a33985a2da4fa72b12ad223fcfb8d541ce861c7eb0dfccf6bdc65729201c |
| Outline Drawing                 | page-077-outline.png   SHA-256:<br>b0f781850d2bd40b880c1f0862ab92c39ef72ba9c414eec87c10b6cb876b4512    |

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

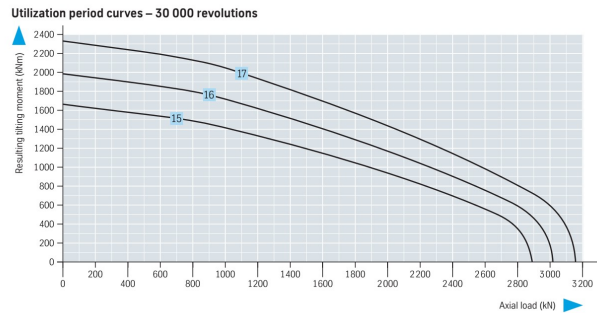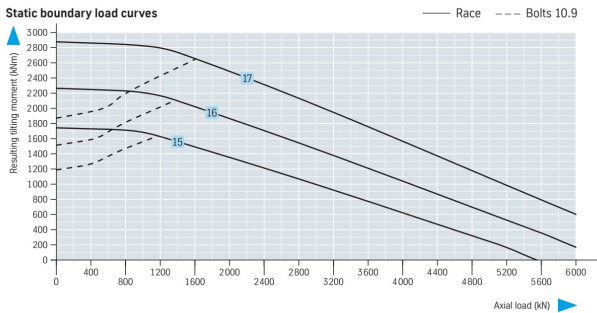

page-077-load-curves.png | SHA-256: 178a33985a2da4fa72b12ad223cfb8d541ce861c7eb0dfccf6bdc6b5729201c

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

|                                                                               |                                                                          |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <div>PUBLIC RECORD UID</div> <div>QCWHGYBQVVPUXY3RMCBX6B3DFF</div>            | <div>SOURCE DOCUMENT</div> <div>ROTHE_ERDE_CATALOG_2023</div>            |
| <div>SOURCE FILE</div> <div>Rothe Erde.pdf</div>                              | <div>SOURCE LOCATION</div> <div>PDF page 77   Printed page 148-149</div> |
| <div>VERIFICATION</div> <div>Level 3 - MERYDOM Engineering<br/>Verified</div> | <div>REVIEWED BY</div> <div>MERYDOM Engineering Department</div>         |

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/tr/urunler/muadil-doner-tabla-rulmanlari/rothe-erde/061-40-1800-014-29-1503/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.