


Technical drawing of a mechanical assembly in cross-section. The drawing shows a base plate with a central raised section. The base plate has a total width of 2552.4 and a total length of 2281. The central raised section has a width of 2100 and a length of 2022. The base plate is secured with three bolts on each side, with a spacing of 2270 between the bolts. The central raised section has a height of 172 and a width of 2395. The base plate has a thickness of 139. The central raised section has a thickness of 181. The drawing includes various dimension lines and a watermark 'MERIDIAN.COM'.

Dimension	Value
Total Width	2552.4
Total Length	2281
Central Section Width	2100
Central Section Length	2022
Base Plate Thickness	139
Central Section Height	172
Central Section Width (Inner)	2395
Spacing Between Bolts	2270
Central Section Thickness	181
Central Section Width (Outer)	2502
Central Section Length (Inner)	2395
Central Section Length (Outer)	2502
Central Section Width (Inner)	2395
Central Section Length (Outer)	2502

Сжимающие нагрузки · Данные каталога

Эквивалентный опрокидывающий момент [кНм]

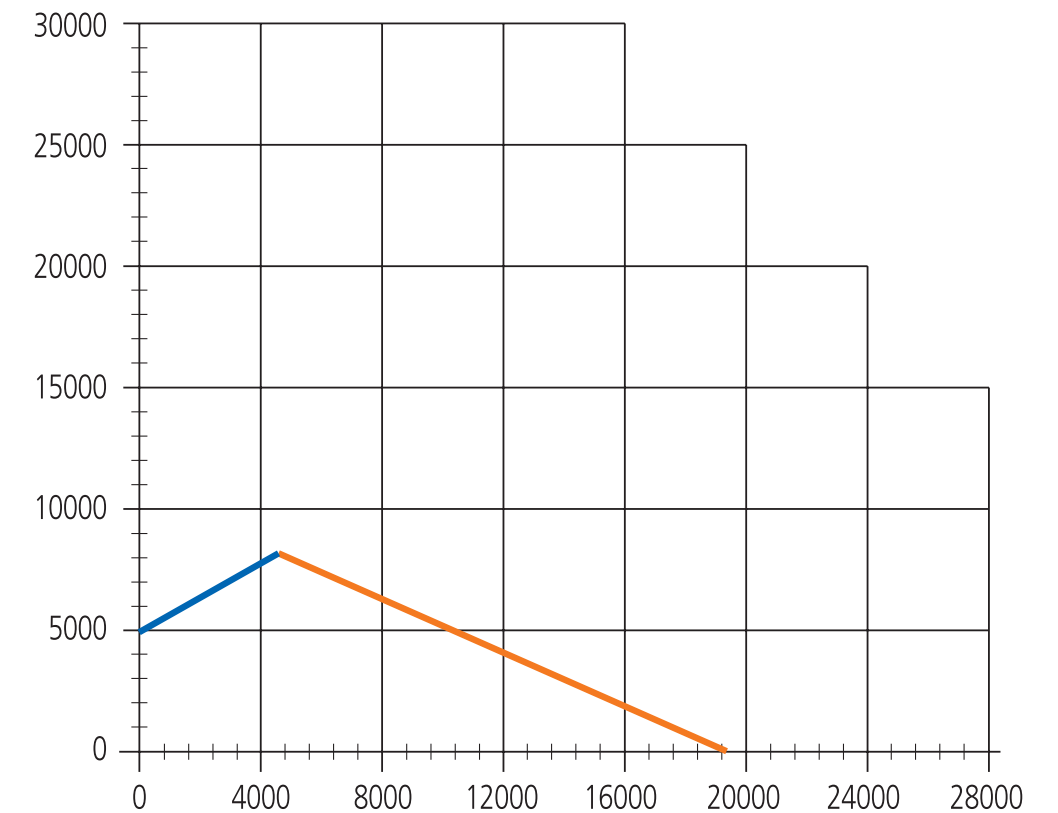

— Кривая болтов Rp0,2 · Класс прочности 10.9

— Кривая дорожки качения

Соблюдайте технические указания исходного каталога.

Размеры в мм. Сечение из каталога; не в масштабе.

Исходные размеры и детали сечения сохранены.

Наружное кольцо: 40 × Ø39 · La Ø2395

Внутреннее кольцо: 40 × Ø39 · Li Ø2100

Источник: IMO · PDF 8

OD Ø2552.4 · ID Ø2022 · H 181 · La Ø2395 · Li Ø2100 mm

IMO 31-32 2240/2-07300 — CAD-чертёж (PDF) | MERYDOM

MERYDOM

Трёхрядное роlikовое ОПУ

31-32 2240/2-07300

Источник: IMO / 31-32

mm · NTS · REV 1.0 · Лист 1/1