



BEARING SECTION

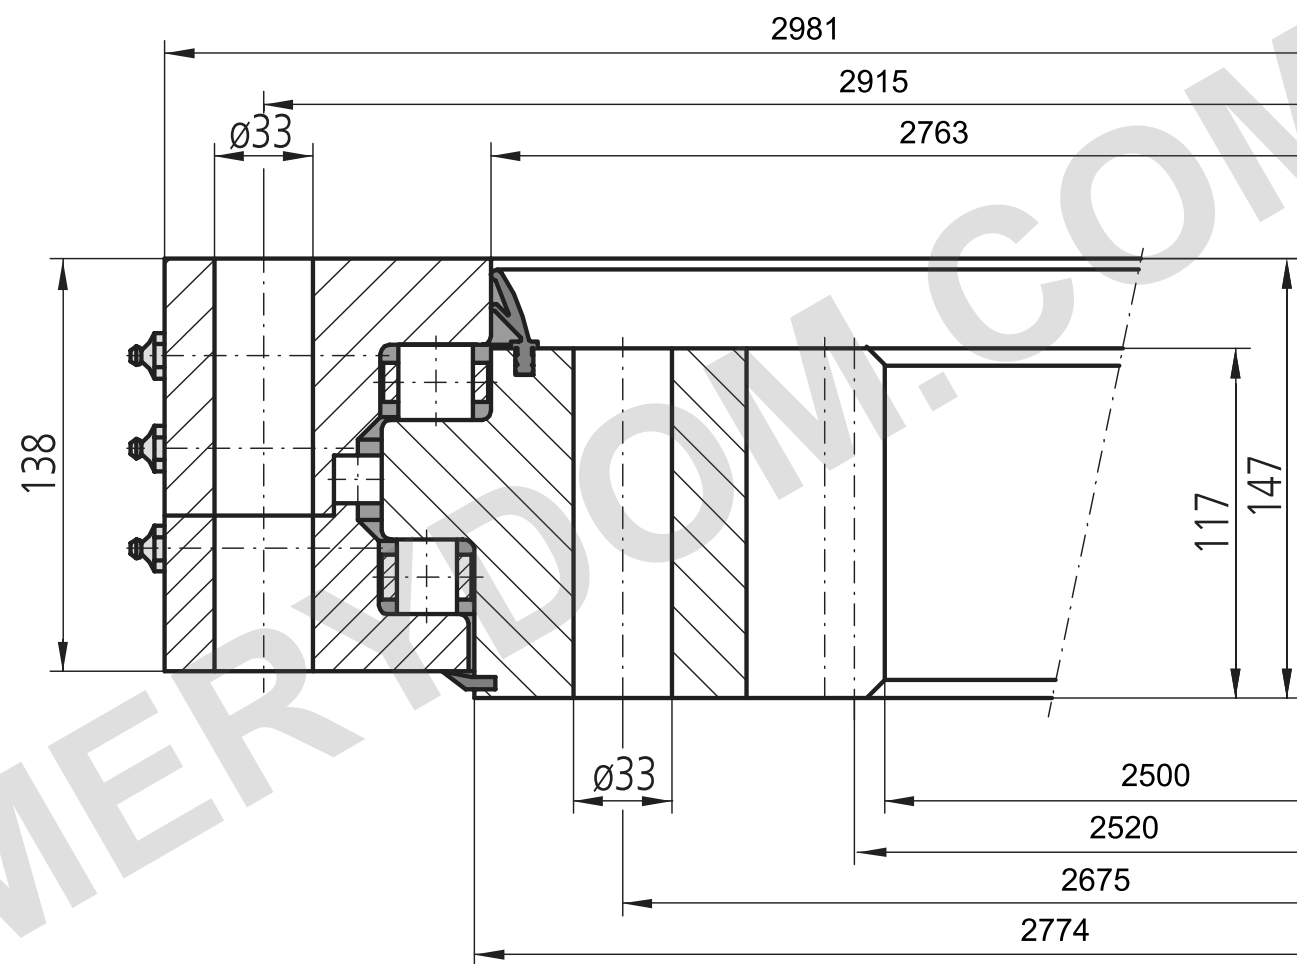

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

32-25 2800/2-06890

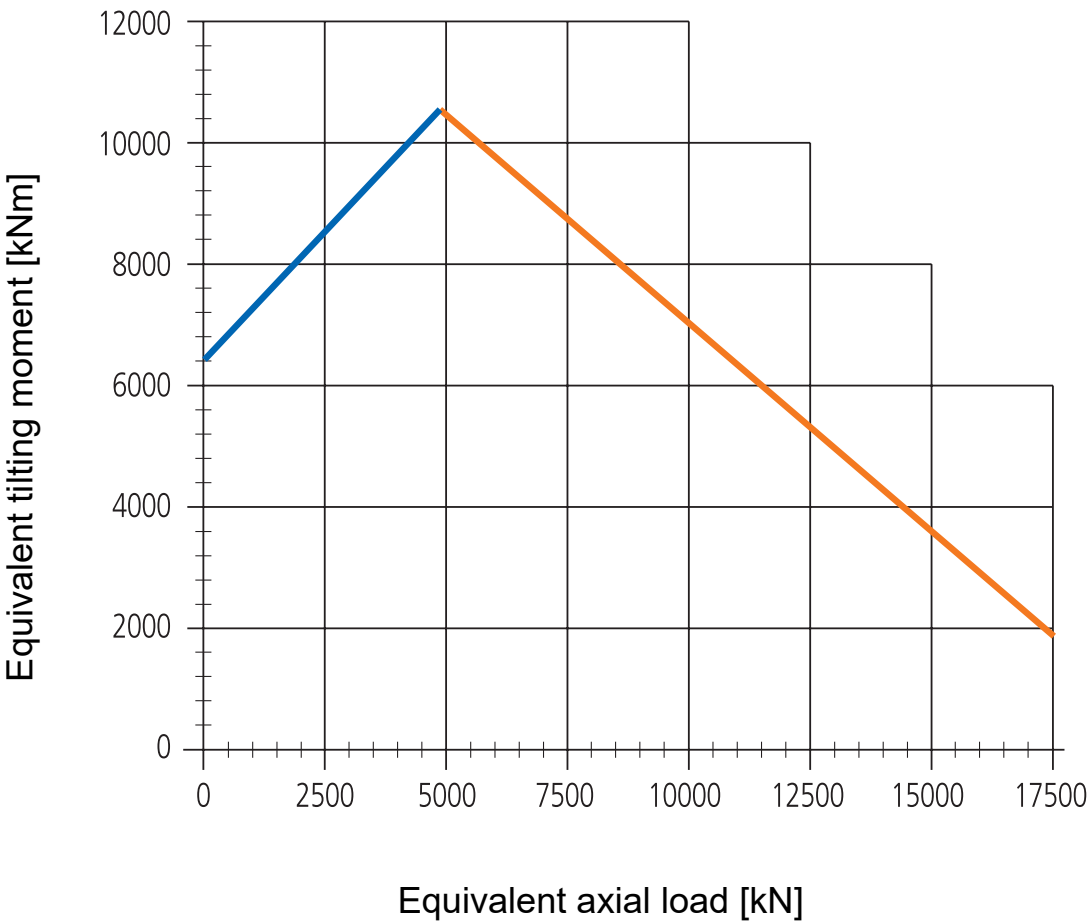

— Bolt curve Rp0.2 · Bolt grade 10.9

— Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 60 × Ø33 · La Ø2915
Inner ring: 60 × Ø33 · Li Ø2675
Reference: IMO · PDF 6
OD Ø2981 · ID Ø2500 · H 147 · La Ø2915 · Li Ø2675 mm
IMO 32-25 2800/2-06890 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Triple-row roller slewing bearing

32-25 2800/2-06890

Reference: IMO / 32-25

mm · NTS · REV 1.0 · Sheet 1/1