



BEARING SECTION

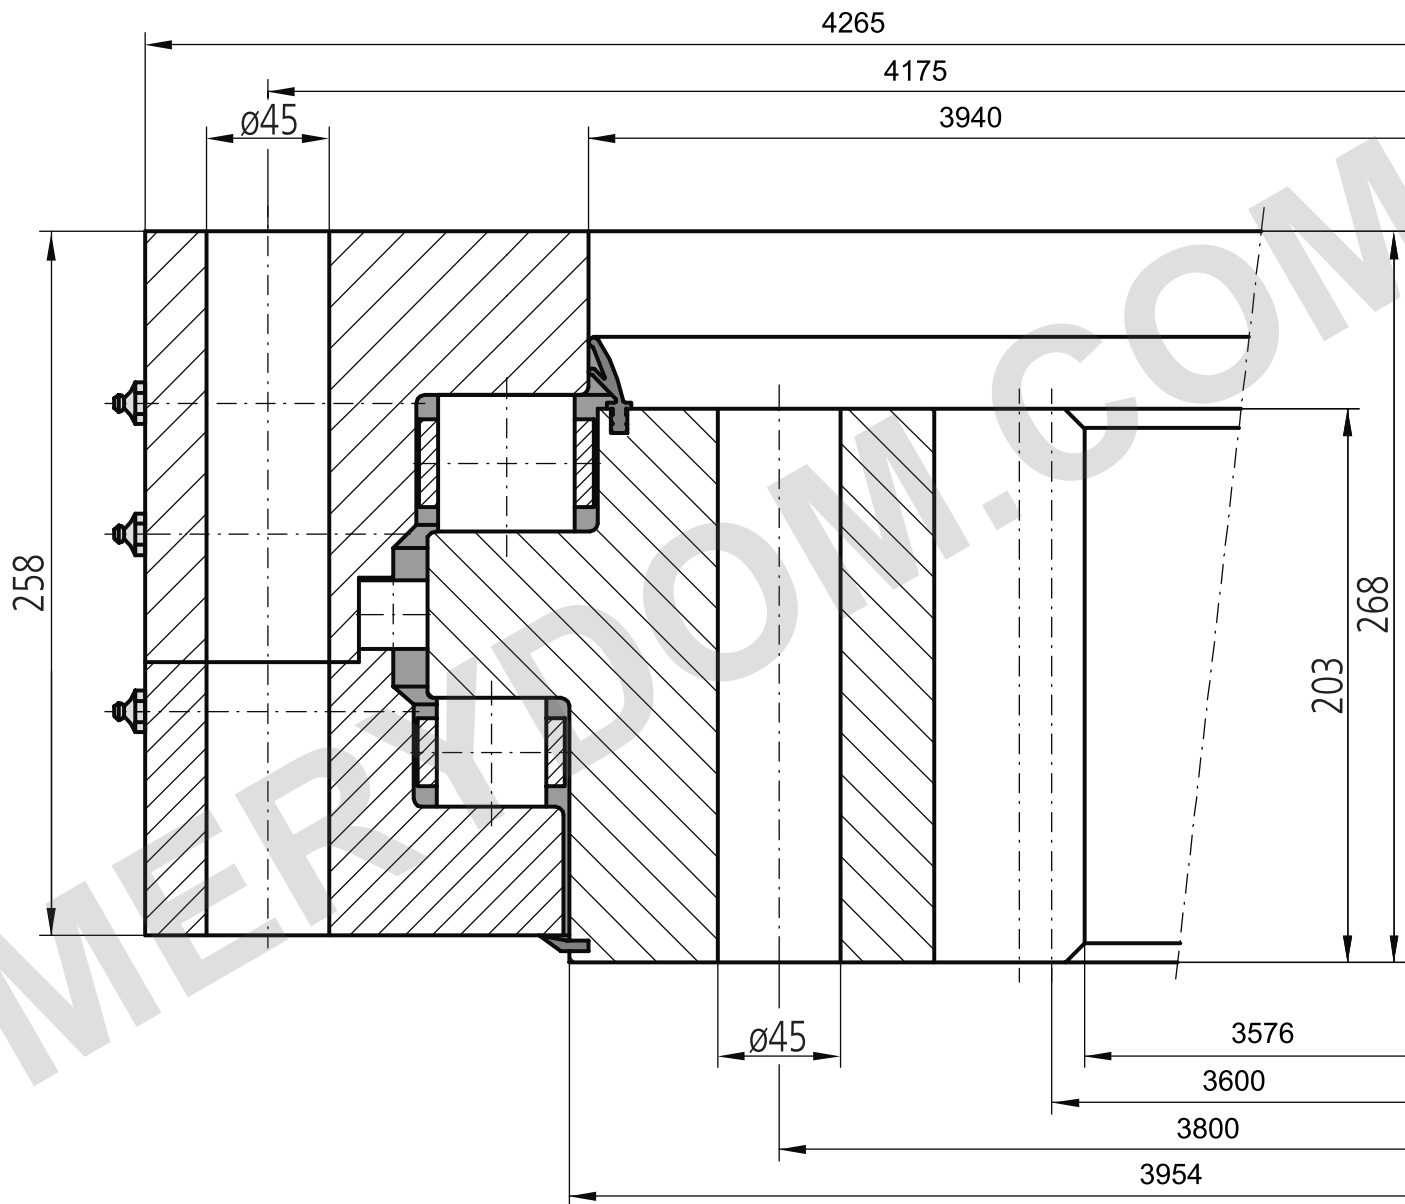

LIMITING LOAD DIAGRAM

Compressive loads · Catalogue reference

32-50 4000/2-07580

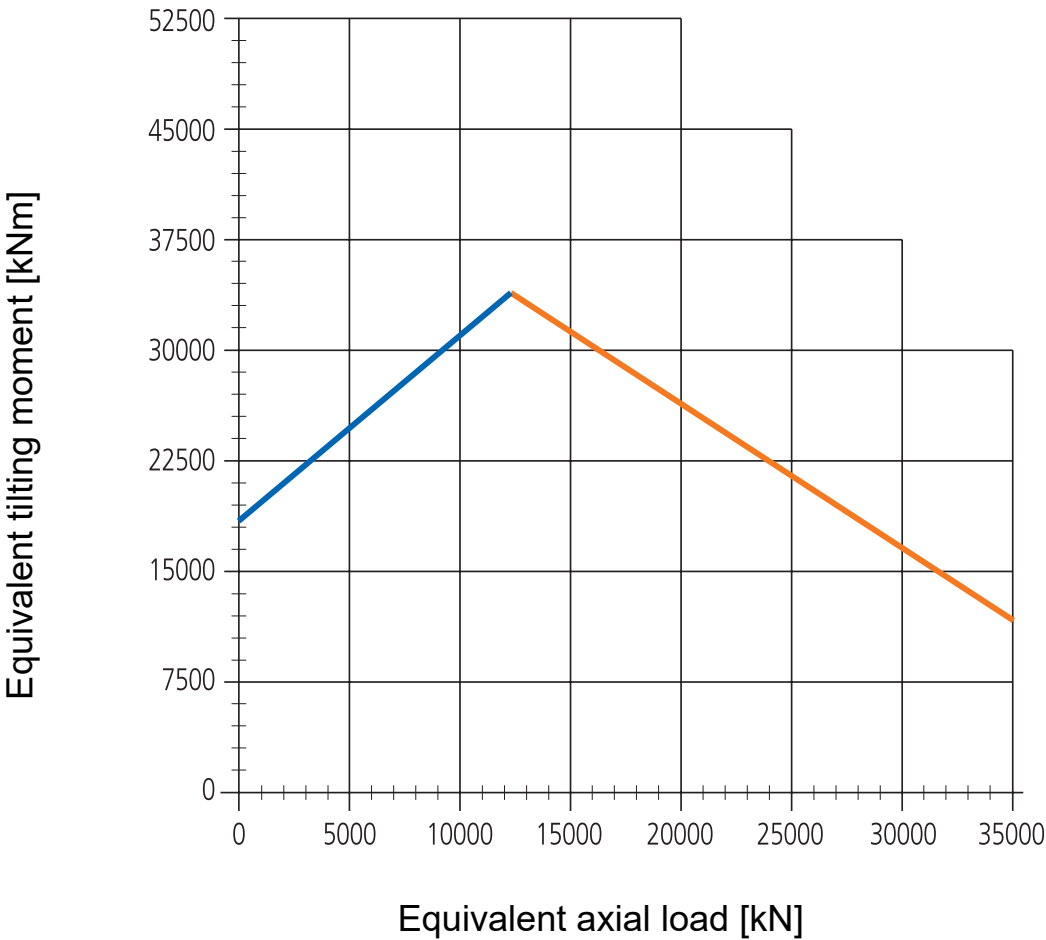

- Bolt curve Rp0.2 · Bolt grade 10.9
- Raceway curve

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
Original catalogue dimensions and section details retained.
Outer ring: 60 × $\varnothing 45$ · La $\varnothing 4175$
Inner ring: 60 × $\varnothing 45$ · Li $\varnothing 3800$
Reference: IMO · PDF 12
OD $\varnothing 4265$ · ID $\varnothing 3576$ · H 268 · La $\varnothing 4175$ · Li $\varnothing 3800$ mm
IMO 32-50 4000/2-07580 — CAD Drawing (PDF) | MERYDOM

MERYDOM

Triple-row roller slewing bearing

32-50 4000/2-07580

Reference: IMO / 32-50

mm · NTS · REV 1.0 · Sheet 1/1