


BEARING SECTION


LIMITING LOAD DIAGRAM

VU 140179

Fixing screws · Supported load

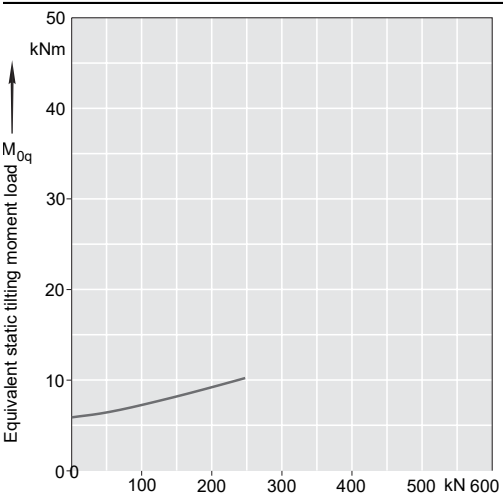

Raceway · Supported load

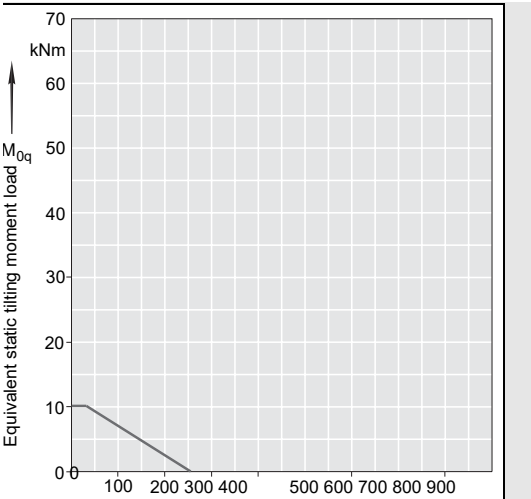

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

ZT dimensions apply only to the optional centred version.

Reference: INA · 404 · PDF 76 / 76 / 77

Illustrative lubrication defaults: thread M8×1.

Adjustable after customer confirmation.

OD Ø234 · ID Ø124.5 · H 35 · La Ø214 · Li Ø144.5 mm

INA VU 140179 — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

VU 140179

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1