


BEARING SECTION

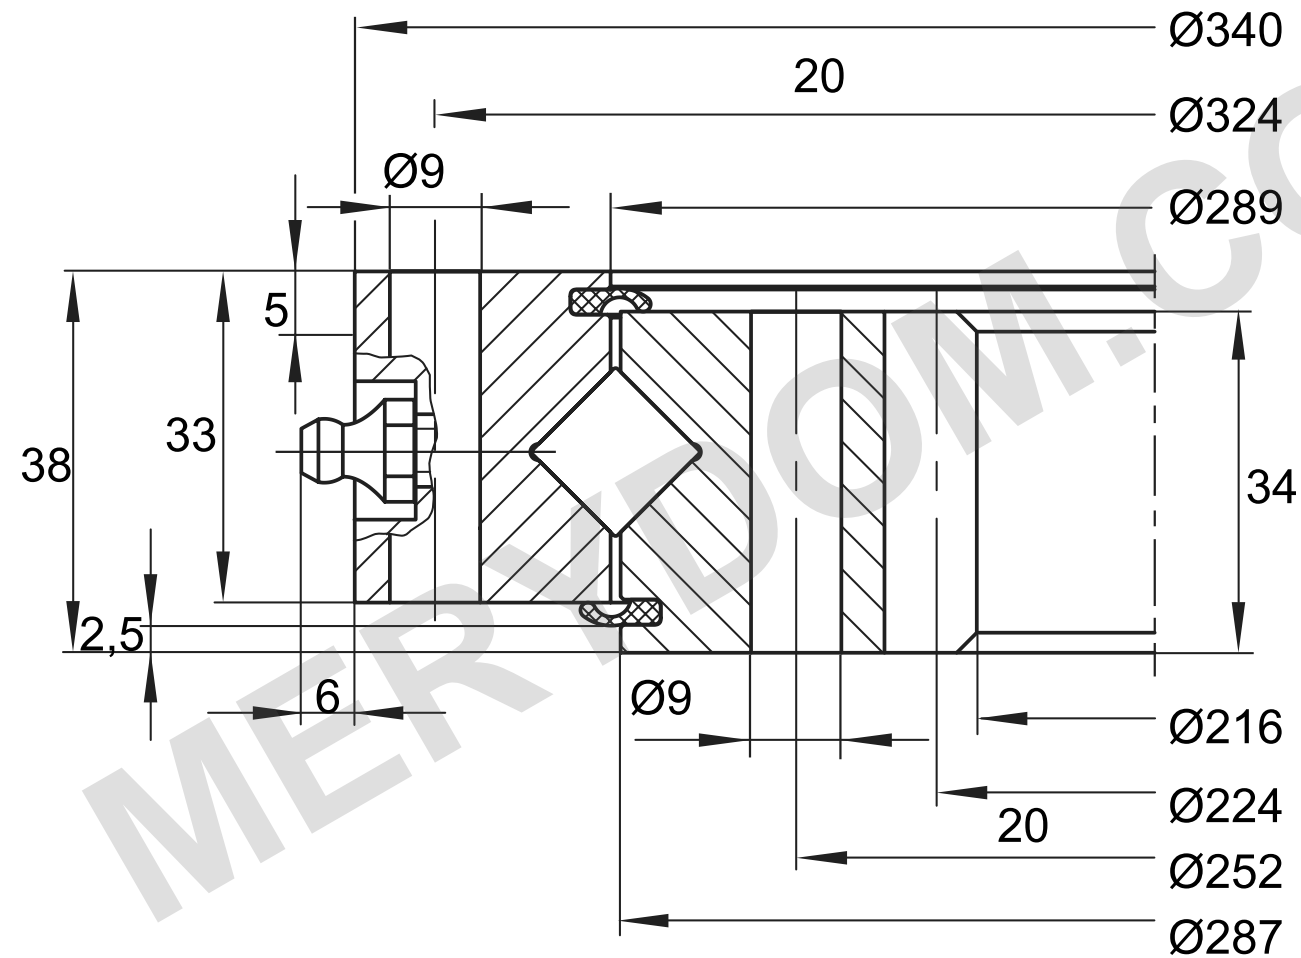

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

ZT dimensions apply only to the optional centred version.

Reference: INA · 404 · PDF 91 / 90 / 91

Illustrative lubrication defaults: count 4, thread M8×1.

Adjustable after customer confirmation.


OD Ø340 · ID Ø216 · H 38 · La Ø324 · Li Ø252 mm

INA XI 120288 N — CAD Drawing (PDF) | MERYDOM


LIMITING LOAD DIAGRAM

XI 120288 N

Fixing screws · Supported load

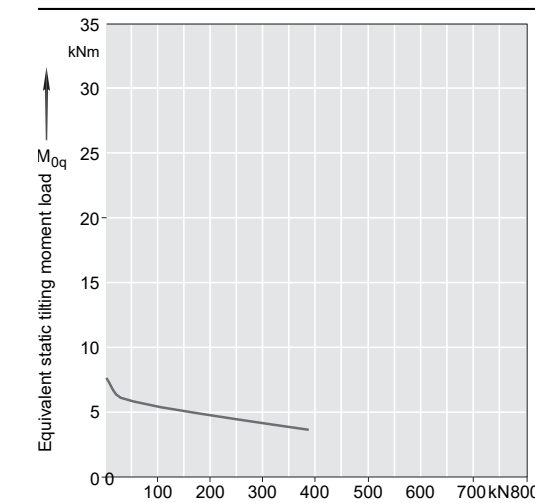

Raceway · Supported load

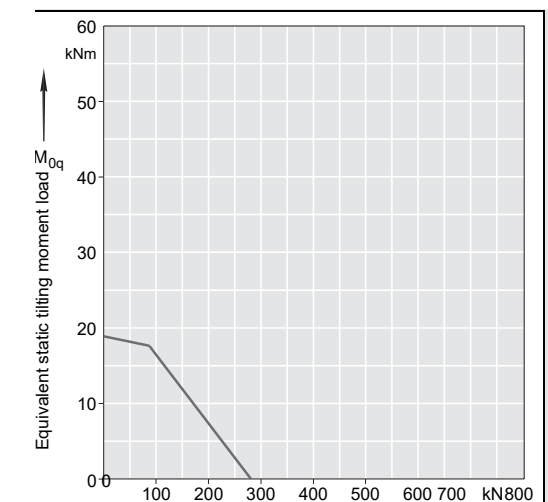

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

MERYDOM

BEARING SECTION

XI 120288 N

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1