



BEARING SECTION

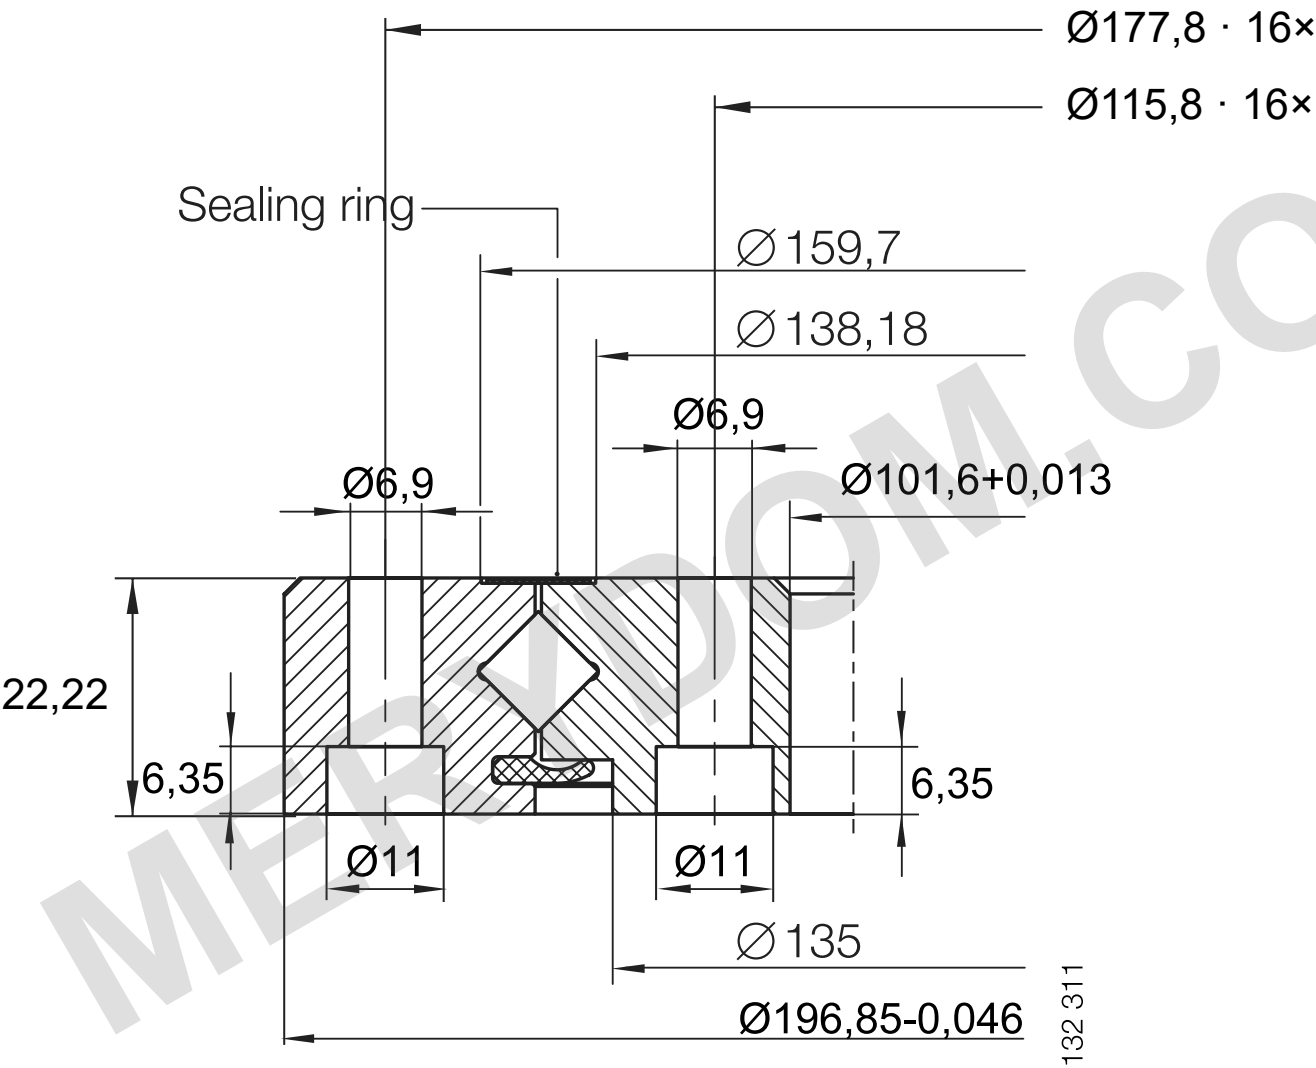


LIMITING LOAD DIAGRAM

XU 080149

Fixing screws · Supported load

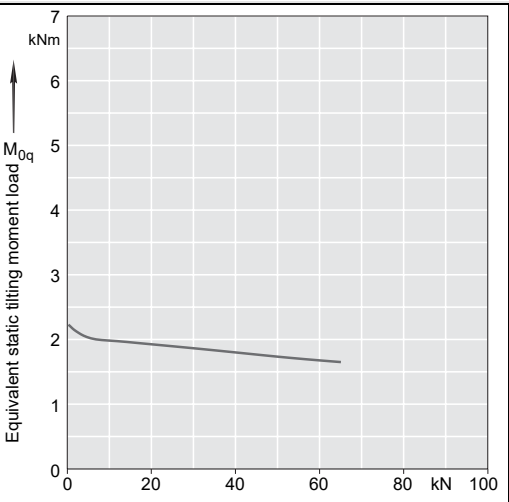

Raceway · Supported load

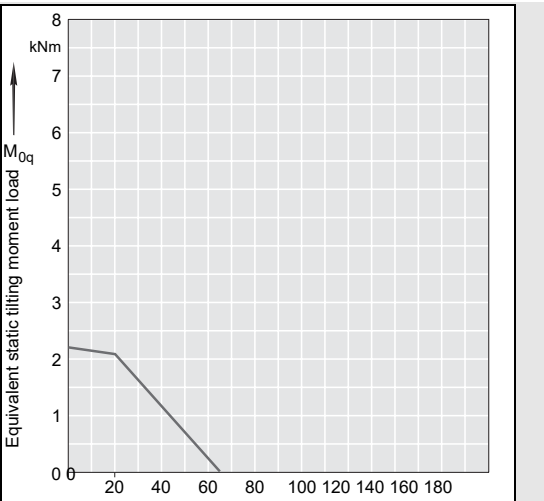

Equivalent static axial load F_{0q} [kN]

Equivalent static tilting moment M_{0q} [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.

Internal transitions are illustrative; external and mounting dimensions follow the source.

Reference: INA · 404 · PDF 93 / 92 / 93

Illustrative internal transition length: 4 mm; adjustable after customer confirmation.

Illustrative lubrication defaults: 4 fittings, M8×1; customer-adjustable.

OD $\varnothing 196.85$ · ID $\varnothing 101.6$ · H 22.22 · La $\varnothing 177.8$ · Li $\varnothing 115.8$ mm

INA XU 080149 — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

XU 080149

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1