


BEARING SECTION

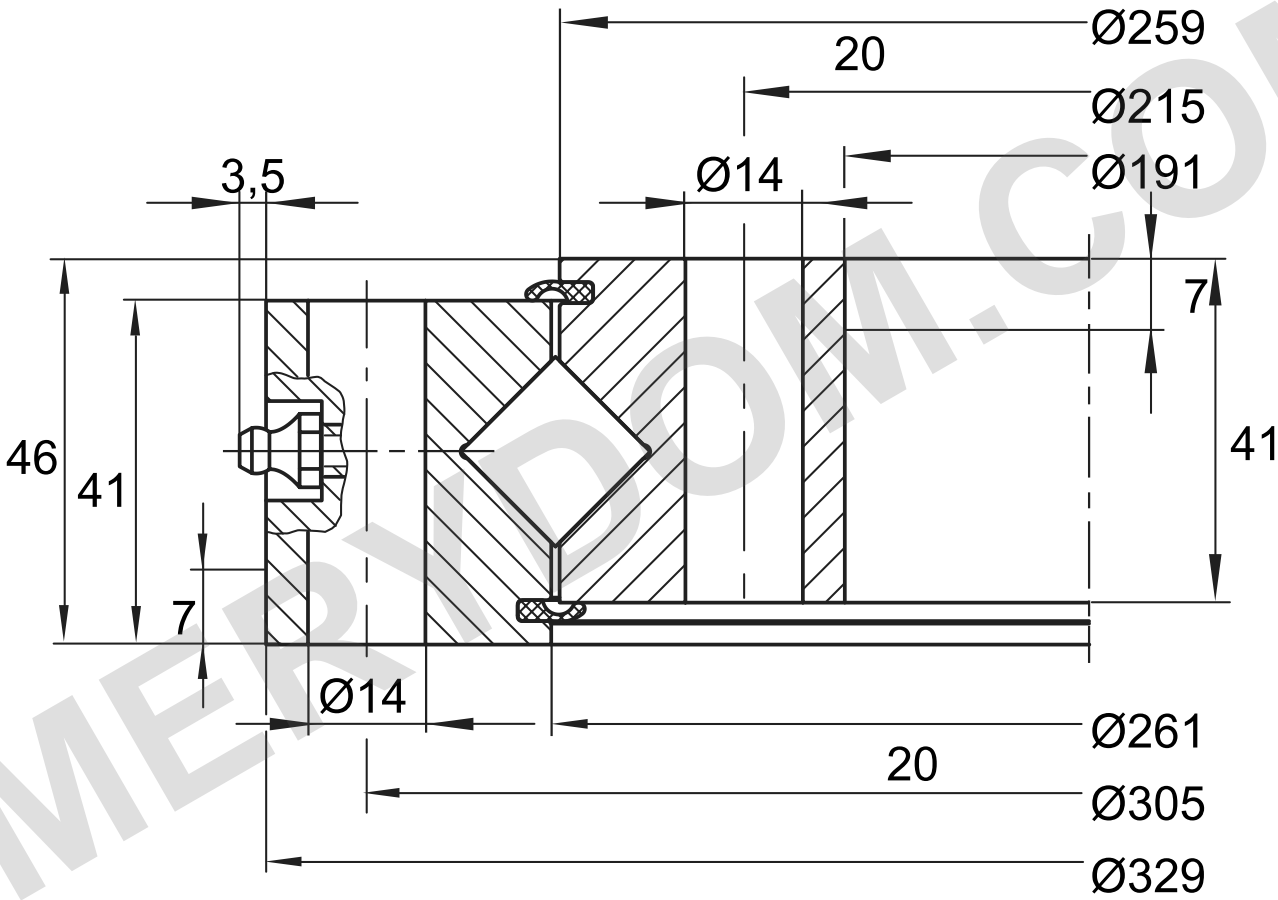


132 141a


LIMITING LOAD DIAGRAM

XU 160260

Fixing screws · Supported load

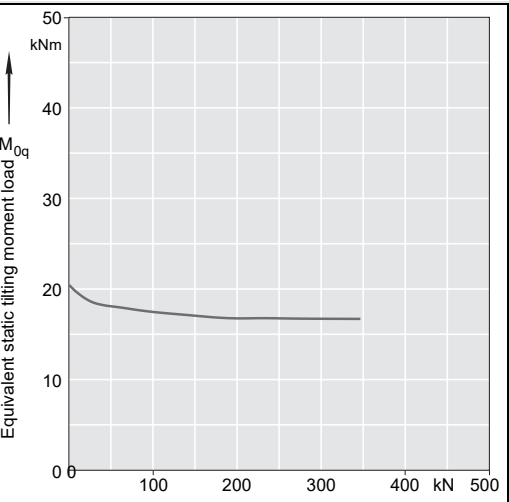

Raceway · Supported load

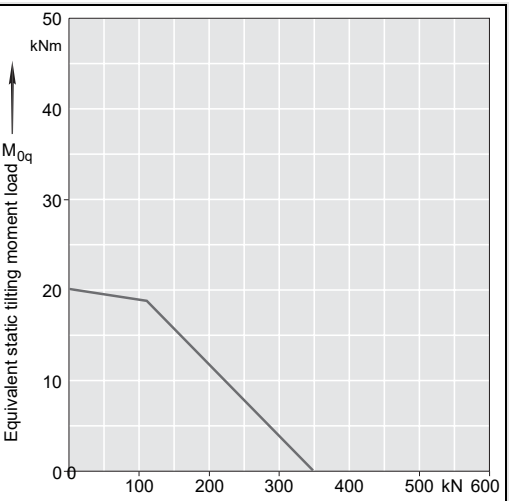

Equivalent static axial load F0q [kN]

Equivalent static tilting moment M0q [kNm]

Follow the technical information in the source catalogue.

REFERENCE NOTES

Dimensions in mm. Catalogue section; do not scale.
ZT dimensions apply only to the optional centred version.
Reference: INA · 404 · PDF 94 / 94 / 94
Illustrative lubrication defaults: count 4, thread M8×1.
Adjustable after customer confirmation.
OD Ø329 · ID Ø191 · H 46 · La Ø305 · Li Ø215 mm
INA XU 160260 — CAD Drawing (PDF) | MERYDOM

MERYDOM

BEARING SECTION

XU 160260

Reference: INA / 404

mm · NTS · REV 1.0 · Sheet 1/1