



BEARING SECTION

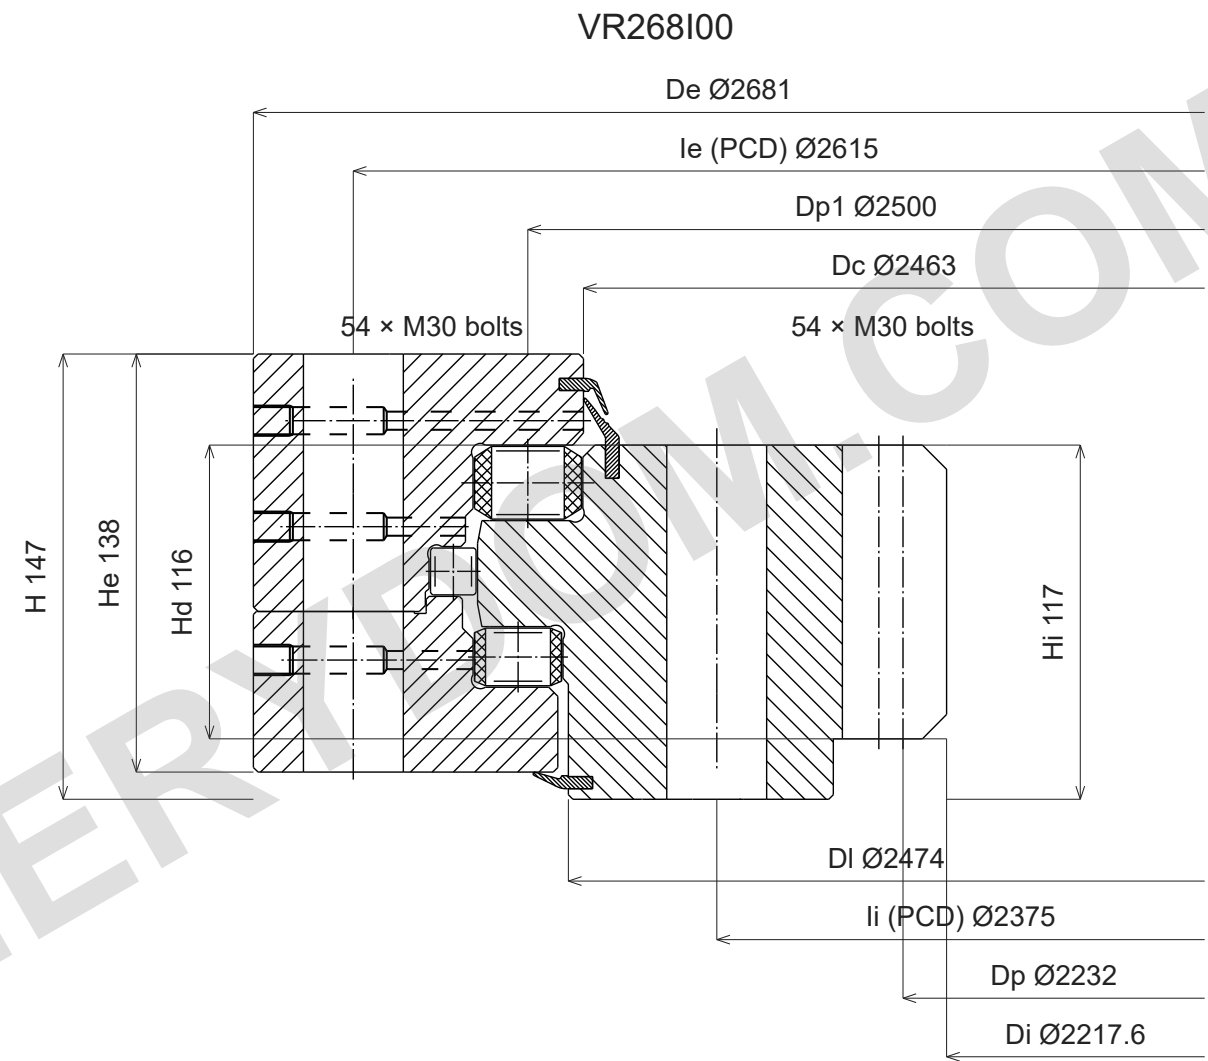

m 18; Z 124; xm -9; km -1.8

LOAD CAPACITY

La Leonessa VR268I00 — Load capacity curve

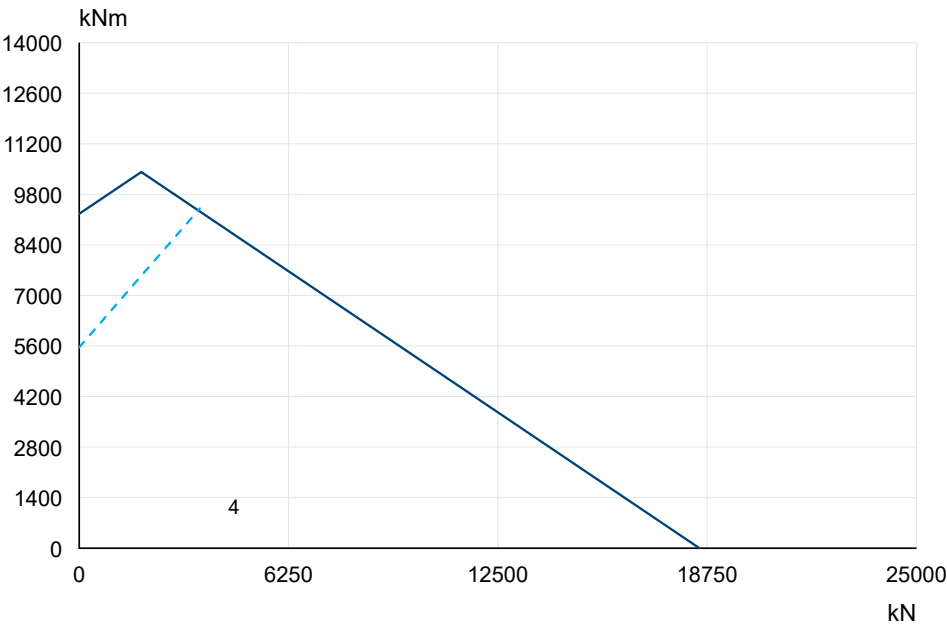

VR268I00 · source VRI-25 curve 4 · PDF p10

Axial compression force [kN]

Tilting moment [kNm] · original chart scale

Torque-wrenched class 10.9 bolts

VR268I00 uses source curve 4.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: La Leonessa Three Row 2019 / VRI-25; dimensions p8/9; load chart p10, curve 4; catalogue model VR268I00.
H 147; Hd 116; m 18; Z 124; De/Di 2681/2217.6; Hi/He 117/138; Dc/DI/Dp1 2463/2474/2500; le/li (PCD) 2615/2375.
La Leonessa VR268I00 — Product page | MERYDOM

MERYDOM
Three-row roller
VR268I00
REFERENCE: La Leonessa / VRI-25
mm · NTS · REV B32-1 · SHEET 1/1